


SAMPLE CATALOG NUMBER

CB4020 - 2LF13(MVOLT) - GSIL - REM
 Model Number Lamping Option (Voltage) Finish Option

Model		Lamping Options		Finish	Diffuser Options	Options	
Model Number	Dimensions						
CB4000 	W	17"	(432 mm)	1F27 2LF13 2N40T10 2QF26	PTD PB	<ul style="list-style-type: none"> • ABA • PP • AR • SL • BG • SR • GD White acrylic standard	<ul style="list-style-type: none"> DCC REM XEM XPS
	H	8-1/2"	(216 mm)				
	D	3-3/4"	(95 mm)				
	MC	3-1/4"	(83 mm)				
CB4010 	W	17"	(432 mm)	1F27 2LF13 2N40T10 2QF26	PTD PB	<ul style="list-style-type: none"> • ABA • PP • AR • SL • BG • SR • GD White acrylic standard	<ul style="list-style-type: none"> DCC REM XEM XPS
	H	8-1/2"	(216 mm)				
	D	3-3/4"	(95 mm)				
	MC	3-1/4"	(83 mm)				
CB4020 	W	17"	(432 mm)	1F27 2LF13 2N40T10 2QF26	PTD PB	<ul style="list-style-type: none"> • ABA • PP • AR • SL • BG • SR • GD White acrylic standard	<ul style="list-style-type: none"> DCC REM XEM XPS
	H	8-1/2"	(216 mm)				
	D	3-3/4"	(95 mm)				
	MC	3-1/4"	(83 mm)				

LINE DRAWINGS

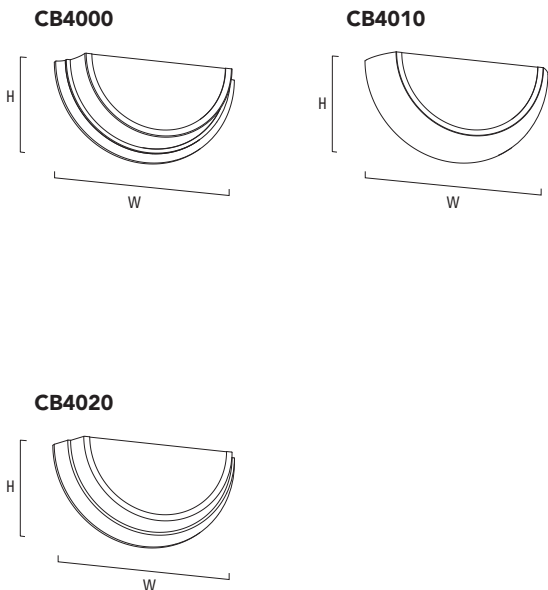

ABBREVIATION KEY

• Indicated Finish or Option is not available with XPS

Dimensions

- W** Width
- H** Height
- D** Depth (measured from wall to front of fixture)
- MC** Mounting Center (measured from top of fixture to center of junction box)

Lamping Options (Voltage)

- F27** 27w long twin tube, 2G11 base, FLR (MVOLT; 347V)
 - LF13** 13w twin tube 4-pin, 2GX7 base, FLR (MVOLT)
 - QF26** 26w quad, 4-pin G24q-3 base, FLR (MVOLT; 347V)
 - N40T10** 40w T-10, medium base, INC (120V)
- Specify Voltage or MVOLT
 MVOLT is a ballast that operates 120V through 277V

Finishes (see inside back cover)

- PTD** Painted - specify color code (ex. BRNZ for Bronze)
- PB** Polished Brass

Diffuser Options (see inside back cover)

- **ABA** Hand Painted Alabaster Alternative
 - **AR** Arctic Crush Lumicor®
 - **BG** Cobalt Blue Glass Diffuser
 - **GD** Opal White Glass Diffuser
 - **PP** Paper Leaf Lumicor®
 - **SL** Silver Spun Lumicor®
 - **SR** Saffron Taipei Lumicor®
- Note: White acrylic diffuser is standard unless other diffuser option is specified

Options

- DCC** Damp clear coat required for all metal finishes in damp locations
- REM** Remote emergency battery pack for fluorescent lampping
- XEM** Emergency battery pack mounted in provided recessed box for fluorescent lampping (replaces standard junction box)
- XPS** Express 10 day shipment

PHOTOMETRICS and BIM


Complete BIM (Building Information Modeling) and photometric files for these models may be downloaded from www.visalighting.com

Reports


IES File Number	LER	Report	page
CB4000-2LF13	30	01241	405
CB4010-2LF13	30	01241	405
CB4020-2LF13	30	01241	405

See report on indicated page for complete detail

Candela Distribution



Cobalt Blue Glass Diffuser (BG) Option

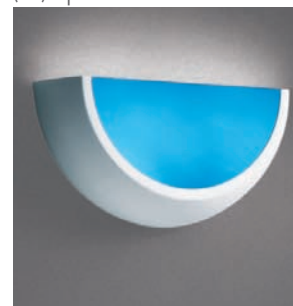

Door Height = 7'
 Ceiling Height = 9'
 Silhouette Height = 6'

CRESCENT™

INDOOR

DECORATIVE AND PERFORMANCE

WALL



CB4000-PB



CB4010-TW9016




CB4020-GSIL

FEATURES

- 5 year product warranty
- ADA compliant
- Heavy gauge spun metal housing
- 1/8" thick white acrylic diffuser standard with matte finish, UV stable, UL-94 HB flame class rated
- Optional specialty diffuser materials available, including some Lumicor® recyclable resin materials
- Oven cured no VOC acrylic powder coat for painted finishes; oven cured low VOC clear coat on metal finishes
- Easy tool-less relamping
- Fluorescent or incandescent lampling
- High power factor electronic ballast (fluorescent lampling)
- Mounts to standard electrical junction box (by others) with provided hardware. XEM option requires replacement of junction box with proprietary junction box (included with XEM option). The XEM junction box is available as a ship-ahead component for rough-in if needed

COMPANIONS



SUGGESTED VARIATIONS

- Specialty finishes to match architectural detail
- Specialty diffuser material
- Fused circuit protection
- Can be constructed of non-ferrous materials for use in magnetic resonance imaging (MRI) rooms



Approved for indoor damp locations.
Metal finishes require DCC (damp clear coat) for 5 year warranty