


SAMPLE CATALOG NUMBER

CV1658 - 1FS21(MVOLT) - BCA - BA - XPS
 Model Number Lamping Option (Voltage) Frame Finish Perforated Panel Finish Option

Model				Lamping Options	Finish		Diffuser Options		Options	
Model Number	Dimensions				Frame	Perforated Panel				
CV1656 VDA	W	5-1/4"	(133 mm)	1FS14	PTD	PTD	• ABA	• SL	DCC	IEM
	H	24"	(610 mm)							
	D	1"	(25 mm)		BCA		• PP		FUSE	
	RH	23-5/8"	(600 mm)		SNA					
	RD	3-1/2"	(89 mm)							
					Accent bars are brushed stainless steel standard		White acrylic standard			
CV1658 VDA	W	5-1/4"	(133 mm)	1FS21	PTD	PTD	• ABA	• SL	DCC	IEM
	H	36"	(914 mm)							
	D	1"	(25 mm)		BCA		• PP		FUSE	
	RH	35-5/8"	(905 mm)		SNA				IEM	
	RD	3-1/2"	(89 mm)						XPS	
					Accent bars are brushed stainless steel standard		White acrylic standard			
CV1660 VDA	W	5-1/4"	(133 mm)	1FS28	PTD	PTD	• ABA	• SL	DCC	FUSE
	H	47-1/2"	(1207 mm)							
	D	1"	(25 mm)		BCA		• PP		• DIM-L	XPS
	RH	47-1/8"	(1197 mm)		SNA					
	RD	3-1/2"	(89 mm)							
					Accent bars are brushed stainless steel standard		White acrylic standard			
CV1662 VDA	W	5-1/4"	(133 mm)	1FS35	PTD	PTD	• ABA	• SL	DCC	FUSE
	H	59-1/2"	(1511 mm)							
	D	1"	(25 mm)		BCA		• PP			
	RH	59-1/8"	(1502 mm)		SNA					
	RD	3-1/2"	(89 mm)							
					Accent bars are brushed stainless steel standard		White acrylic standard			

LINE DRAWINGS

CV1656 / CV1658 / CV1660 / CV1662



ABBREVIATION KEY

- Indicated Finish or Option is not available with XPS

Dimensions		
W	Width	
H	Height	
D	Depth (measured from wall to front of fixture)	
RH	Recessed Height	
RD	Recessed Depth	
Lamping Options (Voltage)		
FS14	14w T-5, mini bi-pin base, FLR	(MVOLT)
FS21	21w T-5, mini bi-pin base, FLR	(MVOLT)
FS24	24w T-5/HO, mini bi-pin base, FLR	(MVOLT)
FS28	28w T-5, mini bi-pin base, FLR	(MVOLT)
FS35	35w T-5, mini bi-pin base, FLR	(MVOLT)
FS39	39w T-5/HO, mini bi-pin base, FLR	(MVOLT)
FS54	54w T-5/HO, mini bi-pin base, FLR	(MVOLT; 347V)
FS80	80w T-5/HO, mini bi-pin base, FLR	(MVOLT)
Specify Voltage or MVOLT MVOLT is a ballast that operates 120V through 277V T-5/HO lamp source exceeds VISA standards for brightness		

Finishes (see inside back cover)	
PTD	Painted - specify color code (ex. BRNZ for Bronze)
BA	Brushed Aluminum
BCA	Brushed Chrome Alternative
SNA	Satin Nickel Alternative


Diffuser Options (see inside back cover)	
• ABA	Hand Painted Alabaster Alternative
• AR	Arctic Crush Lumicor®
• PP	Paper Leaf Lumicor®
• SL	Silver Spun Lumicor®
• SR	Saffron Taipei Lumicor®
Note: White acrylic diffuser is standard unless other diffuser option is specified	

Options	
DCC	Damp clear coat required for all metal finishes in damp locations
• DIM-A	Fluorescent dimming, Advance Mark 10 (FS54 only), specify 120V or 277V
• DIM-L	Fluorescent dimming, Lutron Eco-10, specify 120V or 277V
FUSE	Fusing
IEM	Integral emergency battery pack (dry location), specify voltage
XPS	Express 10 day shipping


PHOTOMETRICS and BIM

Complete BIM (Building Information Modeling) and photometric files for these models may be downloaded from www.visalighting.com


Reports		
IES File Number	LER	Report page
CV1656-1FS14	28	
CV1658-1FS21	31	
CV1658-1FS39	28	08051 415
CV1660-1FS28	32	
CV1662-1FS35	33	
See report on indicated page for complete detail		



Mounting Detail

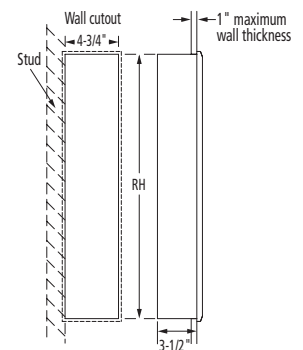

Note: One long edge of cutout must be adjacent to the wall stud or other appropriate mounting structure

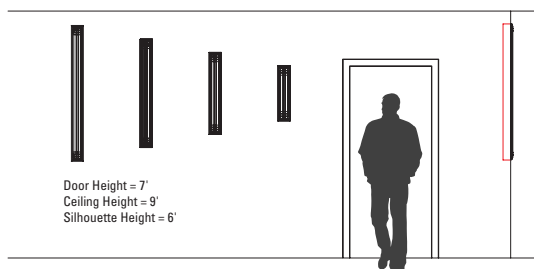

VISAGE™


INDOOR

DECORATIVE AND PERFORMANCE

WALL / CEILING






Visage can be mounted vertically or horizontally
(may require modification to existing wall structure)

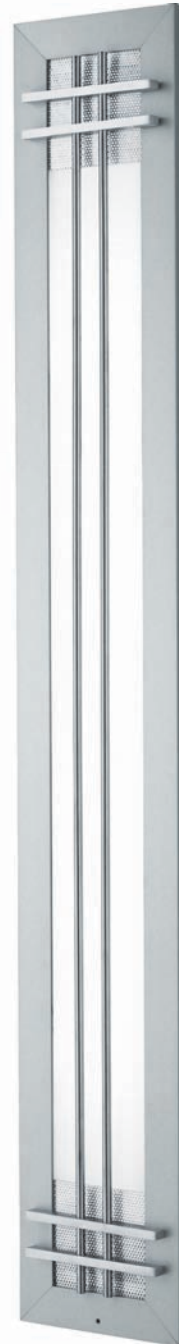

CV1658-BCA-BA
Accent bars are brushed stainless steel (standard)

COMPANIONS



FEATURES

- 5 year product warranty
- ADA compliant
- Extruded aluminum frame
- Solid brushed stainless steel accents
- 1/8" thick white acrylic diffuser with matte finish, UV stable, UL-94 HB Flame Class rated
- Oven cured no VOC acrylic powder coat for painted finishes; oven cured low VOC clear coat on metal finishes
- Fluorescent lamping
- High power factor electronic ballast
- Mounting suitable for drywall applications in wall or ceiling
- Shallow 3-1/2" depth recessed housing rated for through-circuit wiring
- Recessed housing in stock and available for rough-in installation

SUGGESTED VARIATIONS

- Specialty finishes to match architectural detail
- Mix and match accents and trim from other product designs
- Special lens or diffuser inserts
- Increase or decrease fixture height and/or width
- Modify accent bar trim
- Can be constructed to meet direct contact with insulation requirements



Approved for indoor damp locations.
Metal finishes require DCC (damp clear coat) for 5 year warranty