


**SAMPLE CATALOG NUMBER**

CM1730 - 2LF13(MVOLT) - PB1035 - REM  
 Model Number Lamping Option (Voltage) Finish Option


Model				Lamping Options	Finish	Options
Model Number	Dimensions					
<b>CM1730</b>	W	13-1/8"	(333 mm)	<b>1F38</b> <b>2LF13</b> <b>2QF26</b> <b>2N40</b>	<b>PTD</b> BCA <b>BA</b> SNA <b>BB</b>	• ABA DCC REM XEM XPS
	H	5-5/8"	(143 mm)			
<b>CM1732</b>	W	17-3/8"	(441 mm)	<b>1F38</b> <b>4LF13</b> <b>4QF26</b> <b>3N40</b>	<b>PTD</b> BCA <b>BA</b> SNA <b>BB</b>	• ABA DCC REM XEM XPS
	H	6-3/4"	(171 mm)			
<b>CM1734</b>	W	13-1/8"	(333 mm)	<b>1F38</b> <b>2LF13</b> <b>2QF26</b> <b>2N40</b>	<b>PTD</b> BCA <b>BA</b> PB <b>BB</b> SNA	• ABA DCC REM XEM XPS
	H	5-5/8"	(143 mm)			
<b>CM1736</b>	W	17-3/8"	(441 mm)	<b>1F38</b> <b>4LF13</b> <b>4QF26</b> <b>3N40</b>	<b>PTD</b> BCA <b>BA</b> PB <b>BB</b> SNA	• ABA DCC REM XEM XPS
	H	6-3/4"	(171 mm)			

**LINE DRAWINGS**

**CM1730 / CM1732**



**CM1734 / CM1736**



**ABBREVIATION KEY**

• Indicated Finish or Option is not available with XPS

Dimensions	
W	Width
H	Height
Lamping Options (Voltage)	
F38	38w 2D, 4-pin GR10q-4 base, FLR (MVOLT)
LF13	13w twin tube 4-pin, 2GX7 base, FLR (MVOLT)
QF26	26w quad, 4-pin G24q-3 base, FLR (MVOLT; 347V)
N40	40w A-19, medium base, INC (120V)
Specify Voltage or MVOLT MVOLT is a ballast that operates 120V through 277V	
Finishes (see inside back cover)	
PTD	Painted - specify color code (ex. BRNZ for Bronze)
BA	Brushed Aluminum
BB	Brushed Brass
BCA	Brushed Chrome Alternative
PB	Polished Brass
SNA	Satin Nickel Alternative
Options	
ABA	Hand Painted Alabaster Alternative
DCC	Damp clear coat required for all metal finishes in damp locations
REM	Remote emergency battery pack for fluorescent lampping (not available with F38 lampping)
XEM	Emergency battery pack mounted in provided recessed box for fluorescent lampping (replaces standard junction box). Available with LF13 and QF26 only
XPS	Express 10 day shipment



**PHOTOMETRICS and BIM**

Complete BIM (Building Information Modeling) and photometric files for these models may be downloaded from [www.visalighting.com](http://www.visalighting.com)

Reports		
IES File Number	LER	Report page
CM1730-2LF13	23	
CM1732-4QF26	32	08017 415
CM1734-2LF13	23	
CM1736-4QF26	32	08017 415

See report on indicated page for complete detail

**Candela Distribution**

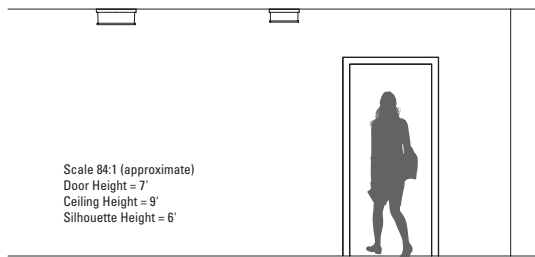



CM1730-PB1035




CM1734-BA

## FEATURES

- 5 year product warranty
- Heavy gauge spun metal housing trim
- Solid metal bar trim
- Oven cured no VOC acrylic powder coat for painted finishes; oven cured low VOC clear coat on metal finishes
- 1/8" thick white acrylic diffuser with matte finish, UV stable, UL-94 HB Flame Class rated
- Easy tool-less relamping
- Fluorescent or incandescent lampling
- High power factor electronic ballast (fluorescent lampling)
- Mounts to standard electrical junction box (by others) with provided hardware. XEM option requires replacement of junction box with proprietary junction box (included with XEM option). The XEM junction box is available as a ship-ahead component for rough-in if needed.

## COMPANIONS

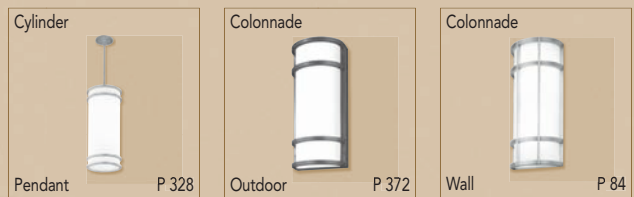

## SUGGESTED VARIATIONS

- Specialty finishes to match architectural detail
- Add fluorescent dimming ballast
- Wire for dual level switching (CM1732, CM1736)
- Include fused circuit protection
- Can be constructed of non-ferrous materials for use in magnetic resonance imaging (MRI) rooms



Approved for indoor damp locations.  
Metal finishes require DCC (damp clear coat) for 5 year warranty