


SAMPLE CATALOG NUMBER

CM1562 - 1TF26(MVOLT) - BZ - BMAT - XPS
 Model Number Lamping Option (Voltage) Housing Finish Accent Panel Finish Option


Model			Lamping Options	Finish		Options
Model Number	Dimensions			Housing	Accent Panel	
CM1562	W H	6-3/8" 9" (162 mm) (229 mm)	※1TF32 1N60	PTD BA BB BCA	BU BZ SNA • VG	PTD • ABA DCC REM XPS
CM1592	W H	13-1/8" 6" (333 mm) (152 mm)	2LF13 2QF26 2N40	PTD BA BB BCA	BU BZ SNA • VG	PTD • ABA DCC REM XEM XPS

LINE DRAWINGS

CM1562



CM1592



ABBREVIATION KEY

- Indicated Finish or Option is not available with XPS
- ※ Configuration operates TF26 or TF32 lamp options and can be labeled up to the highest wattage allowed

Dimensions

W Width
H Height

Lamping Options (Voltage)

- LF13 13w twin tube 4-pin, 2GX7 base, FLR (MVOLT)
 - QF26 26w quad, 4-pin G24q-3 base, FLR (MVOLT)
 - ※ TF26 26w triple, 4-pin GX24q-3 base, FLR (MVOLT)
 - ※ TF32 32w triple, 4-pin GX24q-3 base, FLR (MVOLT)
 - N40 40w A-19, medium base, INC (120V)
 - N60 60w A-19, medium base, INC (120V)
- MVOLT is a ballast that operates 120V through 277V

Finishes (see inside back cover)

- PTD Painted - specify color code (ex. BRNZ for Bronze)
- BA Brushed Aluminum
- BB Brushed Brass
- BCA Brushed Chrome Alternative
- BU Brushed Copper
- BZ Brushed Bronze
- SNA Satin Nickel Alternative
- VG Verdigris Patina over Copper

Options

- ABA Hand Painted Alabaster Alternative
- DCC Damp clear coat required for all metal finishes in damp locations
- REM Remote emergency battery pack for fluorescent lampping
- XEM Emergency battery pack mounted in provided recessed box for fluorescent lampping (replaces standard junction box)
- XPS Express 10 day shipment

PHOTOMETRICS and BIM



Complete BIM (Building Information Modeling) and photometric files for these models may be downloaded from www.visalighting.com

Reports

IES File Number	LER	Report	page
CM1562-1TF32	44	07998	414
CM1592-2QF26	15	08074	416

See report on indicated page for complete detail


Candela Distribution

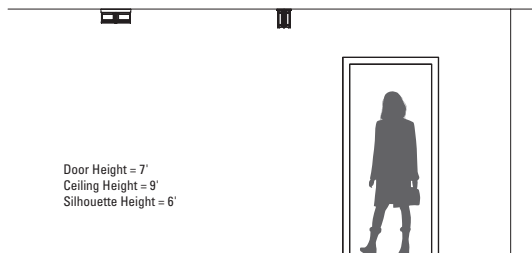

MIDLAND ARTS™



CM1562-BZ-BMAT

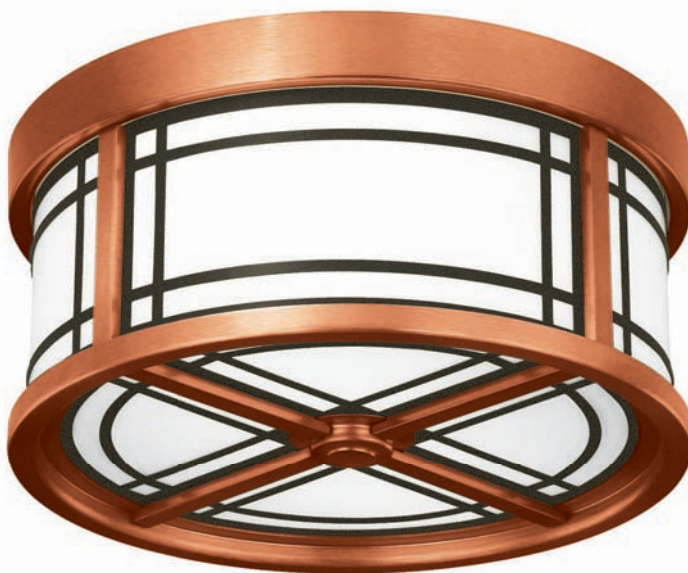


CM1592-BU-BMAT

FEATURES

- 5 year product warranty
- Spun metal canopy
- Solid metal bar trim
- Rolled diffuser accent panel creates a three dimensional effect
- Oven cured no VOC acrylic powder coat for painted finishes; oven cured low VOC clear coat on metal finishes
- 1/8" thick white acrylic diffuser with matte finish, UV stable, UL-94 HB Flame Class rated
- Fluorescent or incandescent lampping
- Fluorescent lampping includes downlight enhancing reflector (CM1562 only)
- High power factor electronic ballast (fluorescent lampping) Fixture labeled for specified lamp wattage to satisfy energy code requirements
- Easy tool-less relampping
- Mounts to standard electrical junction box (by others) with provided hardware. XEM option requires replacement of junction box with proprietary junction box (included with XEM option). The XEM junction box is available as a ship-ahead component for rough-in if needed.

COMPANIONS

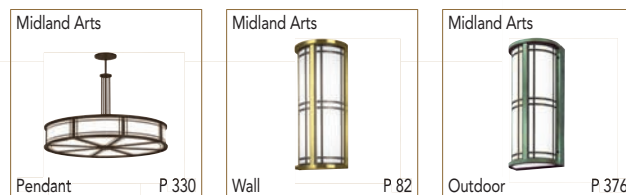

SUGGESTED VARIATIONS

- Specialty finishes to match architectural detail
- Increase overall height
- Add accents to diffuser or trim
- Custom window cutout in diffuser accent panel
- Custom diffuser accent panel
- Eliminate diffuser accent panel
- Sloped ceiling adapter
- Can be constructed of non-ferrous materials for use in magnetic resonance imaging (MRI) rooms
- Fused circuit protection



Approved for indoor damp locations.
Metal finishes require DCC (damp clear coat) for 5 year warranty