


SAMPLE CATALOG NUMBER						
CM1570	-	1TF26(MVOLT)	-	BU	-	XPS
Model Number		Lamping Option (Voltage)		Finish		Option

Model		Lamping Options		Finish		Diffuser Options		Options	
Model Number	Dimensions								
CM1570	W	6-3/4"	(171 mm)	※1TF32	PTD	BU	• ABA • SL • AR • SR • PP	DCC REM XPS	
	H	8-3/4"	(222 mm)		BA BZ BB • VG				
Sandblasted glass standard									
CM1574	W	6-3/4"	(171 mm)	※1TF32	PTD	BU	• ABA • SL • AR • SR • PP	DCC REM XPS	
	H	8-3/4"	(222 mm)		BA BZ BB • VG				
Sandblasted glass standard									
CM1578	W	6-3/4"	(171 mm)	※1TF32	PTD	BU	• ABA • SL • AR • SR • PP	DCC REM XPS	
	H	8-3/4"	(222 mm)		BA BZ BB • VG				
Sandblasted glass standard									

LINE DRAWINGS

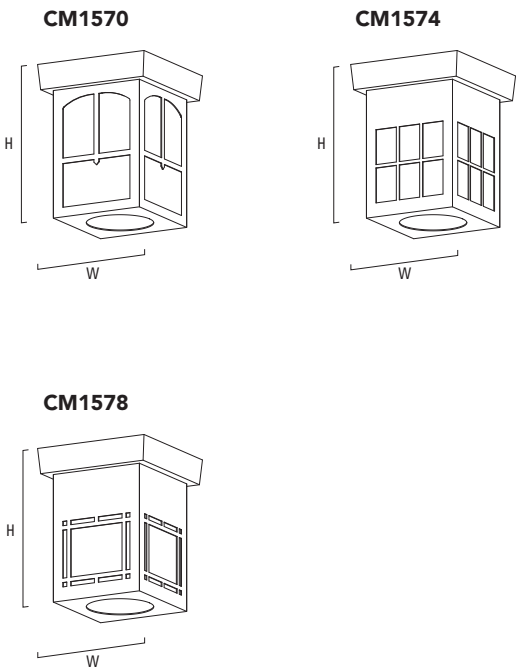

ABBREVIATION KEY

- Indicated Finish or Option is not available with XPS
- ※ Configuration operates TF26 or TF32 lamp options and can be labeled up to the highest wattage allowed

Dimensions

W Width
H Height

Lamping Options (Voltage)

- ※ **TF26** 26w triple, 4-pin GX24q-3 base, FLR (MVOLT)
 - ※ **TF32** 32w triple, 4-pin GX24q-3 base, FLR (MVOLT)
 - N60** 60w A-19, medium base, INC (120V)
- MVOLT is a ballast that operates 120V through 277V

Finishes (see inside back cover)

- PTD** Painted - specify color code (ex. BRNZ for Bronze)
- BA** Brushed Aluminium
- BB** Brushed Brass
- BU** Brushed Copper
- BZ** Brushed Bronze
- **VG** Verdigris Patina over Copper

Diffuser Options (see inside back cover)

- **ABA** Hand Painted Alabaster Alternative
 - **AR** Arctic Crush Lumicor®
 - **PP** Paper Leaf Lumicor®
 - **SL** Silver Spun Lumicor®
 - **SR** Saffron Taipei Lumicor®
- Note: Sandblasted glass diffuser is standard unless other diffuser option is specified. Shadow panels are not included in fixtures with Lumicor® diffusers (CM1574 and CM1578)

Options

- DCC** Damp clear coat required for all metal finishes in damp locations
- REM** Remote emergency battery pack for fluorescent lamping
- XPS** Express 10 day shipment

PHOTOMETRICS and BIM


Complete BIM (Building Information Modeling) and photometric files for these models may be downloaded from www.visalighting.com

Reports

IES File Number	LER	Report	page
CM1570-1TF32	41	07997	414
CM1574-1TF32	28	07999	414
CM1578-1TF32	28	07999	414

See report on indicated page for complete detail

Candela Distribution

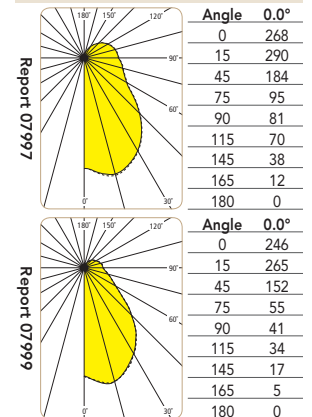

Door Height = 7'
Ceiling Height = 9'
Silhouette Height = 6'

ST. GERMAIN™

INDOOR

DECORATIVE AND PERFORMANCE



CM1570-BU

CM1574-AG7038

CM1578-BMAT

FEATURES

- 5 year product warranty
- Compact scale
- Fabricated metal housing with internal reinforcing corner extrusions
- Internal shadow panel creates a three dimensional effect
- Oven cured no VOC acrylic powder coat for painted finishes; oven cured low VOC clear coat on metal finishes
- Optional specialty diffuser materials available, including some Lumicor® recyclable resin materials
- Tempered sandblasted glass side panels
- Easy tool-less relamping
- Fluorescent or incandescent lampping
- Fluorescent lampping includes downlight enhancing reflector
- High power factor electronic ballast (fluorescent lampping). Fixture labeled for specified lamp wattage to satisfy energy code requirements
- Mounts to standard electrical junction box (by others) with provided hardware

COMPANIONS



SUGGESTED VARIATIONS

- Specialty finishes to match architectural detail
- Increase overall height and/or width
- Add accents to diffuser or trim
- Custom window cutout in housing panels
- Sloped ceiling adapter
- Can be constructed of non-ferrous materials for use in magnetic resonance imaging (MRI) rooms
- Fused circuit protection



Approved for indoor damp locations.
Metal finishes require DCC (damp clear coat) for 5 year warranty

VISA LIGHTING
An Oldenburg Group Company
800-788-VISA www.visalighting.com

CEILING