


**SAMPLE CATALOG NUMBER**  
 CP4670 - 3F39-2F18(MVOLT) - SNA - CB - DCC - OAH(30)  
 Model Number Lamping Option (Voltage) Trim and Canopy Finish Accent Finish Option Option

Model			Lamping Options	Finish		Options
Model Number	Dimensions		Uplight - Bowl Light	Trim and Canopy	Accent	
<b>CP4670</b>	W	30" (762 mm)	3F39 - 2F18	PTD	• BCB	• ABA DCC OAH XPS
	OAH	30" (762 mm)		BA	• SN	
	X	6-3/4" (171 mm)		BB	SNA	
			BCA	PTD	• CB	
				BA	PB	
				BB	• SN	
				BCA	SNA	
					• BCB	
<b>CP4672</b>	W	40" (1016 mm)	6F50 - 2F27	PTD	• BCB	• ABA DCC OAH XPS
	OAH	36" (914 mm)		BA	• SN	
	X	8-1/2" (216 mm)		BB	SNA	
				BCA	PTD	• CB
					BA	PB
					BB	• SN
					BCA	SNA
					• BCB	

**LINE DRAWINGS**



**ABBREVIATION KEY**

• Indicated Finish or Option is not available with XPS

Dimensions	
W	Width
OAH	Overall Height
X	Body Height

Lamping Options (Voltage)	
F18	18w long twin tube, 2G11 base, FLR (MVOLT)
F27	27w long twin tube, 2G11 base, FLR (MVOLT; 347V)
F39	39w long twin tube, 2G11 base, FLR (MVOLT)
F50	50w long twin tube, 2G11 base, FLR (MVOLT; 347V)

Specify Voltage or MVOLT  
 MVOLT is a ballast that operates 120V through 277V

Finishes (see inside back cover)	
PTD	Painted - specify color code (ex. BRNZ for Bronze)
BA	Brushed Aluminum
BB	Brushed Brass
BCA	Brushed Chrome Alternative
• BCB	Brushed Chrome
• CB	Polished Chrome
PB	Polished Brass
• SN	Satin Nickel
SNA	Satin Nickel Alternative



Options	
• ABA	Hand Painted Alabaster Alternative
DCC	Damp clear coat required for all metal finishes in damp locations
OAH	Overall height variation from standard. Include desired height in inches. (ex. OAH(30) will produce an overall fixture height of 30")
XPS	Express 10 day shipping

**PHOTOMETRICS and BIM**


Complete BIM (Building Information Modeling) and photometric files for these models may be downloaded from [www.visalighting.com](http://www.visalighting.com)

Reports		
IES File Number	LER	Report page
CP4670-3F39-2F18	55	08103 417
CP4672-6F50-2F27	61	08100 417

See report on indicated page for complete detail

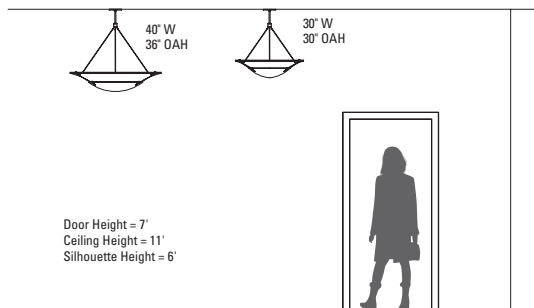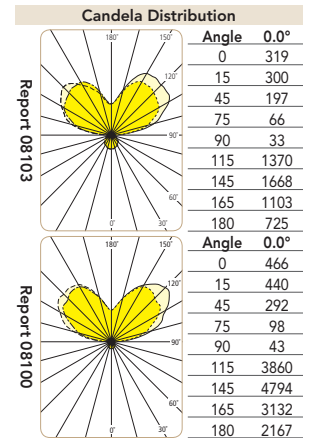

**Cross Section View**

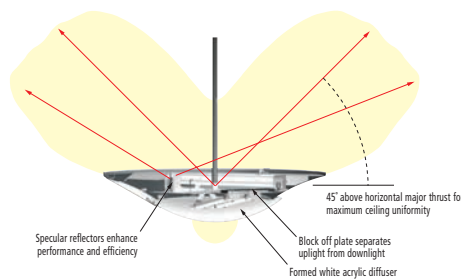




CP4670-SNA-CB

## FEATURES

- 5 year product warranty
- UL approved Power Art Cable™ mounting system (patent pending) uses a braided stainless steel jacket to encapsulate power conductors and provide support with configurations rated for loads up to 150lbs
- Heavy gauge spun metal housing
- Solid metal accents
- Stainless steel wire accents
- Oven cured, no VOC acrylic powder coat for painted finishes, Oven cured Low VOC on metal finishes
- Thermally formed 1/8" thick white acrylic diffuser with matte finish, UV stable, UL-94 HB Flame Class rated
- Easy tool-less relamping
- Fluorescent lamping
- High power factor electronic ballast
- Specular aluminum reflectors to enhance optical performance
- Uplight and bowl light separated optically and wired for discrete operation
- Mounts to standard electrical junction box (by others) for sloped ceiling up to 45 degrees from horizontal

## COMPANIONS

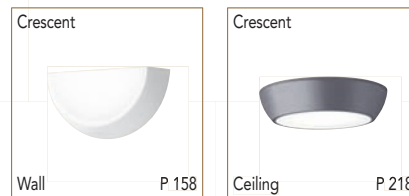

## SUGGESTED VARIATIONS

- Specialty finishes to match architectural detail
- Mix and match accents and stem detail from other product designs
- Can be configured to accommodate lowering system mounting (by others)
- Uplight dimming options



Approved for indoor damp locations.  
Metal finishes require DCC (damp clear coat) for 5 year warranty