


**SAMPLE CATALOG NUMBER**



CP4661 - 3F40(120V) - JB9005 - DIM-L - OAH(30)  
 Model Number Lamping Option (Voltage) Finish Option Option

Model		Lamping Options		Finish		Options	
Model Number	Dimensions						
<b>CP4660</b>	W 25" (635 mm)	3F39		PTD	BCA	• ABA	IEM
	OAH 24" (610 mm)						
<b>CP4662</b>	X (Flat) 3-3/8" (86 mm)			BA	PB	• DCC	OAH
	X (Cone) 5" (127 mm)						
<b>CP4661</b>	W 35" (889 mm)	3F40		PTD	BCA	• ABA	IEM
	OAH 30" (762 mm)						
<b>CP4663</b>	X (Flat) 3-5/8" (92 mm)	6F40		BA	PB	• DCC	OAH
	X (Cone) 6-1/8" (156 mm)						
		6F50		BB	SNA	• DIM-A	• TL
						• DIM-L	XPS
						FUSE	

**LINE DRAWINGS**

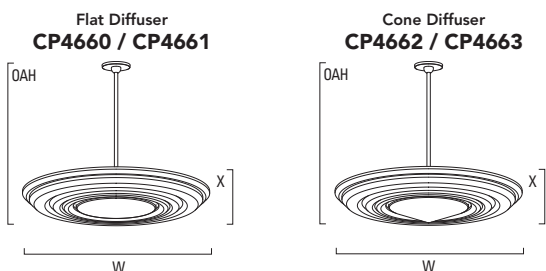

**Structural Blocking Detail**  
 Additional structural blocking (by others) is required for CP4461 and CP4663

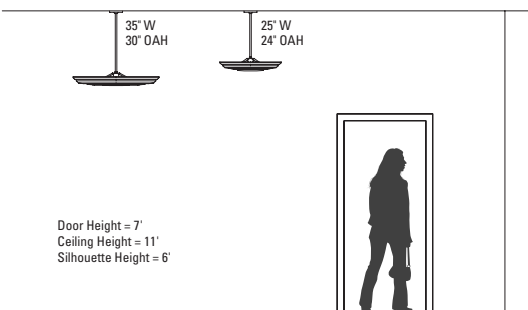

**ABBREVIATION KEY**

• Indicated Finish or Option is not available with XPS

Dimensions	
W	Width
OAH	Overall Height
X	Body Height

Lamping Options (Voltage)	
F39	39w long twin tube, 2G11 base, FLR (MVOLT; 347V)
F40	40w long twin tube, 2G11 base, FLR (MVOLT)
F50	50w long twin tube, 2G11 base, FLR (MVOLT; 347V)

Specify Voltage or MVOLT  
 MVOLT is a ballast that operates 120V through 277V

Finishes (see inside back cover)	
PTD	Painted - specify color code (ex. BRNZ for Bronze)
BA	Brushed Aluminum
BB	Brushed Brass
BCA	Brushed Chrome Alternative
PB	Polished Brass
SNA	Satin Nickel Alternative


Options	
• ABA	Hand Painted Alabaster Alternative
DCC	Damp clear coat required for all metal finishes in damp locations
• DIM-A	Fluorescent dimming, Advance Mark 10, specify voltage (not available in 50w)
• DIM-L	Fluorescent dimming, Lutron Eco-10, specify voltage
FUSE	Fusing, specify 120V or 277V
IEM	Integral emergency battery pack, specify voltage (not available for 6F50 or 8F50 lamping)
OAH	Overall height variation from standard. Include desired height in inches. (ex. OAH(30) will produce an overall fixture height of 30")
• TL	Top lens, tempered prismatic glass
XPS	Express 10 day shipping

**PHOTOMETRICS and BIM**


Complete BIM (Building Information Modeling) and photometric files for these models may be downloaded from [www.visalighting.com](http://www.visalighting.com)

Reports		
IES File Number	LER	Report page
CP4660-3F39	56	04276 409
CP4661-3F50	61	04219 409
CP4661-6F50	60	04212 409
CP4662-3F39	56	04276 409
CP4663-3F50	61	04219 409
CP4663-6F50	60	04212 409

See report on indicated page for complete detail

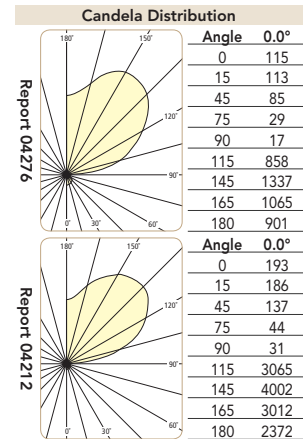

**Cross Section View**

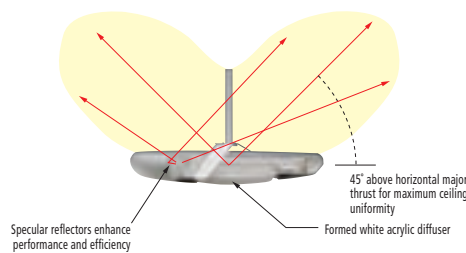



CP4663-JB9005  
Cone Diffuser

CP4661-JB9005  
Flat Diffuser

## FEATURES

- 5 year product warranty
- Heavy gauge spun metal housing
- Oven cured no VOC acrylic powder coat for painted finishes; oven cured low VOC clear coat on metal finishes
- Thermally formed 1/8" thick white acrylic diffuser with matte finish, UV stable, UL-94 HB Flame Class rated
- Easy tool-less relamping
- Fluorescent lamping
- Specular aluminum reflectors to enhance optical performance
- High power factor electronic ballast
- Mounts to standard electrical junction box (by others) for sloped ceiling up to 45 degrees from horizontal. Structural blocking with a 4" octagonal by 2-3/16" deep junction box (by others) is required for CP4661 and CP4663)

## COMPANIONS



## SUGGESTED VARIATIONS

- Specialty finishes to match architectural detail
- Wire for multi-level switching
- Can be configured to accommodate lowering system mounting (by others)
- Mix and match stem details from other product designs
- Weather Tether to secure fixture from wind or excess movement. Safety requirement for all outdoor covered applications



Approved for indoor damp locations.  
Metal finishes require DCC (damp clear coat) for 5 year warranty