



SAMPLE CATALOG NUMBER

CP4002 - 8QF26(MVOLT) - PB - XPS - OAH(30)
 Model Lamping Option (Voltage) Finish Option Option

Model		Lamping Options		Finish		Options	
Model Number	Dimensions						
CP4000	W 23-5/8" (599 mm)	8LF13 8TF26 4N100	PTD • CB BA PB BCA • SN • BCB SNA	• ABA REM DCC • TL FUSE XPS OAH	OAH 27" (686 mm)		
	X 10" (254 mm)						
	NBS 24x9" (610x229 mm)						
CP4002	W 29-5/8" (754 mm)	*8QF26 *8TF42 6N100	PTD • CB BA PB BCA • SN • BCB SNA	• ABA OAH DCC REM • DIM-A • TL • DIM-L XPS FUSE	OAH 30" (762 mm)		
	X 10" (254 mm)						
	NBS 30x9" (762x229 mm)						
CP4004	W 36-1/8" (917 mm)	*8QF26 *8TF42 8TF70 6N150	PTD • CB BA PB BCA • SN • BCB SNA	• ABA OAH DCC REM • DIM-A • TL • DIM-L XPS FUSE	OAH 36" (914 mm)		
	X 12" (305 mm)						
	NBS 36x11" (914x279 mm)						
CP4006	W 44-7/8" (1139 mm)	*8TF42 8TF70 8N150	PTD • CB BA PB BCA • SN • BCB SNA	• ABA FUSE DCC OAH • DIM-A REM • DIM-L XPS	OAH 42" (1067 mm)		
	X 15-1/8" (384 mm)						
	NBS 45x14" (1143x356 mm)						

LINE DRAWINGS

CP4000 / CP4002 / CP4004 / CP4006

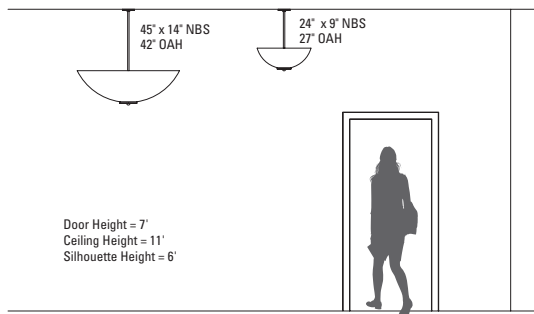

ABBREVIATION KEY

- Indicated Finish or Option is not available with XPS
- * Configuration operates TF26, TF32 or TF42 lamp options and can be labeled up to the highest wattage allowed

Dimensions

- W Width
- OAH Overall Height
- X Body Height
- NBS Nominal Bowl Size

Lamping Options (Voltage)

- LF13 13w twin tube 4-pin, 2GX7 base, FLR (MVOLT)
- QF26 26w quad, 4-pin G24q-3 base, FLR (MVOLT; 347V)
- *TF26 26w triple, 4-pin GX24q-3 base, FLR (MVOLT; 347V)
- *TF32 32w triple, 4-pin GX24q-3 base, FLR (MVOLT; 347V)
- *TF42 42w triple, 4-pin GX24q-4 base, FLR (MVOLT; 347V)
- TF70 70w triple, 4-pin GX24q-6 base, FLR (MVOLT)
- N100 100w A-19, medium base, INC (120V)
- N150 150w A-21, medium base, INC (120V)

Specify Voltage or MVOLT
 MVOLT is a ballast that operates 120V through 277V

Finishes (see inside back cover)

- PTD Painted - specify color code (ex. BRNZ for Bronze)
- BA Brushed Aluminum
- BCA Brushed Chrome Alternative
- BCB Brushed Chrome
- CB Polished Chrome
- PB Polished Brass
- SN Satin Nickel
- SNA Satin Nickel Alternative

Options

- ABA Hand Painted Alabaster Alternative
- DCC Damp clear coat required for all metal finishes in damp locations
- DIM-A Fluorescent dimming, Advance Mark 10, specify voltage
- DIM-L Fluorescent dimming, Lutron Compact SE, specify voltage (not available with TF70)
- FUSE Fusing, specify 120V or 277V
- OAH Overall height variation from standard. Include desired height in inches. (ex. OAH(30) will produce an overall fixture height of 30")
- REM Remote emergency battery pack for fluorescent lampping (see page 435 for detailed information)
- TL Top lens, tempered prismatic glass
- XPS Express 10 day shipping

PHOTOMETRICS and BIM


Complete BIM (Building Information Modeling) and photometric files for these models may be downloaded from www.visalighting.com

Reports

IES File Number	LER	Report	page
CP4000-8LF13	46	01228	404
CP4000-4N100	16	36388	431
CP4002-8QF26	45	01111	404
CP4002-8TF42	57	07987	414
CP4002-6N100	15	01227	404
CP4004-8TF70	72	07988	414
CP4004-6N150	16	36387	431
CP4006-8TF70	72	07988	414
CP4006-8N150	16		

See report on indicated page for complete detail

Candela Distribution

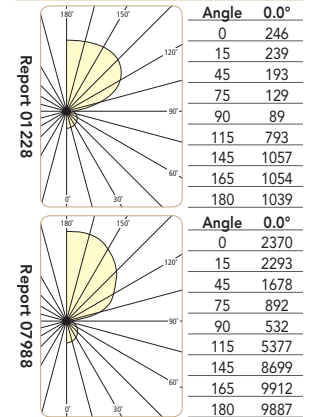



CP4002-PB

COMPANIONS



FEATURES

- 5 year product warranty
- Heavy gauge metal construction and trim work
- Oven cured no VOC acrylic powder coat for painted finishes; oven cured low VOC clear coat on metal finishes
- Thermally formed 1/8" thick white acrylic diffuser with matte finish, UV stable, UL-94 HB Flame Class rated
- Easy tool-less relamping
- Fluorescent or incandescent lamping
- Use coated lamps for incandescent applications
- High power factor electronic ballast (fluorescent lamping)
- Mounts to standard electrical junction box (by others) for sloped ceiling up to 45 degrees from horizontal

SUGGESTED VARIATIONS

- Specialty finishes to match architectural detail
- Larger scale acrylic diffuser
- Alternate lamping up to rated wattage listed
- Accommodate pulse-start metal halide lamping
- Wire for multi-level switching
- Mix and match accents and trim from other product designs
- Sloped ceiling adapter for ceiling slopes greater than 45 degrees
- Can be configured to accommodate lowering system mounting (by others)
- Construct to accept XEM option
- Weather Tether to secure fixture from wind or excess movement. Safety requirement for all outdoor covered applications



Approved for indoor damp locations.
Metal finishes require DCC (damp clear coat) for 5 year warranty