



**SAMPLE CATALOG NUMBER**

CP4022 - 8QF26(MVOLT) - BCB - REM - OAH(30)  
 Model Lamping Option (Voltage) Finish Option Option

Model		Lamping Options		Finish		Options	
Model Number	Dimensions						
<b>CP4020</b>	W 23-5/8" (599 mm)	8LF13	PTD • CB	• ABA	REM		
	OAH 27" (686 mm)	8TF26	BA PB	DCC	• TL		
	X 10" (254 mm)	4N100	BCA • SN	FUSE	XPS		
	NBS 24x9" (610x229 mm)		• BCB SNA	OAH			
<b>CP4022</b>	W 29-5/8" (754 mm)	8QF26	PTD • CB	• ABA	OAH		
	OAH 30" (762 mm)	※8TF42	BA PB	DCC	REM		
	X 10" (254 mm)	6N100	BCA • SN	• DIM-A	• TL		
	NBS 30x9" (762x229 mm)		• BCB SNA	• DIM-L	XPS		
<b>CP4024</b>	W 36-1/8" (917 mm)	8QF26	PTD • CB	• ABA	OAH		
	OAH 36" (914 mm)	※8TF42	BA PB	DCC	REM		
	X 12" (305 mm)	8TF70	BCA • SN	• DIM-A	• TL		
	NBS 36x11" (914x279 mm)	6N150	• BCB SNA	• DIM-L	XPS		
<b>CP4026</b>	W 44-7/8" (1139 mm)	※8TF42	PTD • CB	• ABA	FUSE		
	OAH 42" (1067 mm)	8TF70	BA PB	DCC	OAH		
	X 15-1/8" (384 mm)	8N150	BCA • SN	• DIM-A	REM		
	NBS 45x14" (1143x356 mm)		• BCB SNA	• DIM-L	XPS		

**LINE DRAWINGS**

**CP4020 / CP4022 / CP4024 / CP4026**

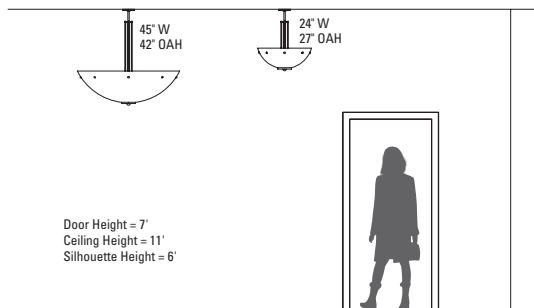

Door Height = 7'  
 Ceiling Height = 11'  
 Silhouette Height = 6'

**ABBREVIATION KEY**

- Indicated Finish or Option is not available with XPS
- ※ Configuration operates TF26, TF32 or TF42 lamp options and can be labeled up to the highest wattage allowed

**Dimensions**

W Width  
 OAH Overall Height  
 X Body Height  
 NBS Nominal Bowl Size

**Lamping Options (Voltage)**

LF13 13w twin tube 4-pin, 2GX7 base, FLR (MVOLT)  
 QF26 26w quad, 4-pin G24q-3 base, FLR (MVOLT; 347V)  
 ※TF26 26w triple, 4-pin GX24q-3 base, FLR (MVOLT; 347V)  
 ※TF32 32w triple, 4-pin GX24q-3 base, FLR (MVOLT; 347V)  
 ※TF42 42w triple, 4-pin GX24q-4 base, FLR (MVOLT; 347V)  
 TF70 70w triple, 4-pin GX24q-6 base, FLR (MVOLT)  
 N100 100w A-19, medium base, INC (120V)  
 N150 150w A-21, medium base, INC (120V)

Specify Voltage or MVOLT  
 MVOLT is a ballast that operates 120V through 277V

**Finishes (see inside back cover)**

PTD Painted - specify color code (ex. BRNZ for Bronze)  
 BA Brushed Aluminum  
 • BCB Brushed Chrome  
 BCA Brushed Chrome Alternative  
 • CB Polished Chrome  
 PB Polished Brass  
 • SN Satin Nickel  
 SNA Satin Nickel Alternative

**Options**

- ABA Hand Painted Alabaster Alternative
- DCC Damp clear coat required for all metal finishes in damp locations
- DIM-A Fluorescent dimming, Advance Mark 10, specify voltage
- DIM-L Fluorescent dimming, Lutron Compact SE, specify voltage (not available with TF70)
- FUSE Fusing, specify 120V or 277V
- OAH Overall height variation from standard. Include desired height in inches. (ex. OAH(30) will produce an overall fixture height of 30")
- REM Remote emergency battery pack for fluorescent lampping (see page 435 for detailed information)
- TL Top lens, tempered prismatic glass
- XPS Express 10 day shipping

**PHOTOMETRICS and BIM**


Complete BIM (Building Information Modeling) and photometric files for these models may be downloaded from [www.visalighting.com](http://www.visalighting.com)

**Reports**

IES File Number	LER	Report	page
CP4020-8LF13	46	01228	404
CP4020-4N100	16	36388	431
CP4022-8QF26	45	01111	404
CP4022-8TF42	57	07987	414
CP4022-6N100	15	01227	404
CP4024-8TF70	72	07988	414
CP4024-6N150	16	36387	431
CP4026-8TF70	72	07988	414
CP4026-8N150	16		

See report on indicated page for complete detail

**Candela Distribution**

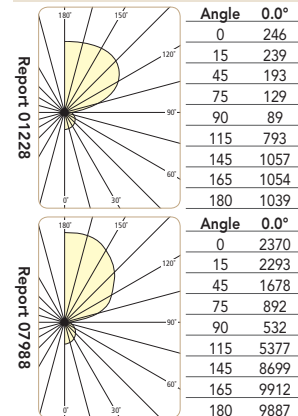



CP4022-BCB

## COMPANIONS



## FEATURES

- 5 year product warranty
- Heavy gauge metal construction and trim work
- Oven cured no VOC acrylic powder coat for painted finishes; oven cured low VOC clear coat on metal finishes
- Thermally formed 1/8" thick white acrylic diffuser with matte finish, UV stable, UL-94 HB Flame Class rated
- Easy tool-less relamping
- Fluorescent or incandescent lamping
- Use coated lamps for incandescent applications
- High power factor electronic ballast (fluorescent lamping)
- Mounts to standard electrical junction box (by others) for sloped ceiling up to 45 degrees from horizontal

## SUGGESTED VARIATIONS

- Specialty finishes to match architectural detail
- Larger scale acrylic diffuser
- Alternate lamping up to rated wattage listed
- Accommodate pulse-start metal halide lamping
- Wire for multi-level switching
- Mix and match accents and trim from other product designs
- Sloped ceiling adapter for ceiling slopes greater than 45 degrees
- Can be configured to accommodate lowering system mounting (by others)
- Construct to accept XEM option
- Weather Tether to secure fixture from wind or excess movement. Safety requirement for all outdoor covered applications



Approved for indoor damp locations.  
Metal finishes require DCC (damp clear coat) for 5 year warranty