


**SAMPLE CATALOG NUMBER**

CC922 - 32LF13(MVOLT) - GSIL - TL - OAH(48)  
 Model Lamping Option (Voltage) Finish Option Option

Model		Lamping Options		Finish	Options		
Model Number	Dimensions						
CC922	DIA	70" (1778 mm)	32LF13	PTD	ABA	QRS	
	OAH	48" (1219 mm)	32TF26	CB	DCC	SBC	
	NBS	24x9" (610x229 mm)	24N100 4N300 4H175	PB	OAH	TL	
CC923	DIA	88" (2235 mm)	32LF13	4N300	PTD	ABA	QRS
	OAH	48" (1219 mm)	32QF26	24N100	CB	DCC	SBC
	NBS	30x9" (762x229 mm)	※32TF42	4H175	PB	OAH	TL

**LINE DRAWINGS**



**ABBREVIATION KEY**

※ Configuration operates TF26, TF32 or TF42 lamp options and can be labeled up to the highest wattage allowed

**Dimensions**

DIA Diameter  
 OAH Overall Height  
 NBS Nominal Bowl Size

**Lamping Options (Voltage)**

LF13 13w twin tube 4-pin, 2GX7 base, FLR (MVOLT)  
 QF26 26w quad, 4-pin G24q-3 base, FLR (MVOLT; 347V)  
 TF26 26w triple, 4-pin GX24q-3 base, FLR (MVOLT; 347V)  
 ※TF32 32w triple, 4-pin GX24q-3 base, FLR (MVOLT; 347V)  
 ※TF42 42w triple, 4-pin GX24q-4 base, FLR (MVOLT; 347V)  
 TF70 70w triple, 4-pin GX24q-6 base, FLR (MVOLT)  
 N100 100w A-19, medium base, INC (120V)  
 N300 300w PS-25, medium base, INC (120V)  
 H175 175w ED-17, medium base, MH (MTAP; 347V)

Specify Voltage, MVOLT or MTAP  
 MVOLT is a ballast that operates 120V through 277V  
 MTAP is a ballast that operates 120V or 277V

**Finishes (see inside back cover)**

PTD Painted - specify color code (ex. BRNZ for Bronze)  
 CB Polished Chrome  
 PB Polished Brass

**Options**

ABA Hand Painted Alabaster Alternative  
 DCC Damp clear coat required for all metal finishes in damp locations  
 OAH Overall height variation from standard.  
 Include desired height in inches.  
 (ex. OAH(48) will produce an overall fixture height of 48")  
 QRS Quartz restrrike, 100w T4 dc bayonet base (in one bowl only)  
 SBC Surface mounted ballast canopy for HID lamping  
 TL Top lens, tempered prismatic glass (standard on H175)

**PHOTOMETRICS and BIM**


Complete BIM (Building Information Modeling) and photometric files for these models may be downloaded from [www.visalighting.com](http://www.visalighting.com)

**Reports (per arm)**


IES File Number	LER	Report	page
CC922-8LF13	46	01228	404
CC922-6N100	15	01227	404
CC922-1H175	69	37279	431
CC923-8LF13	46	01228	404
CC923-8QF26	45	01111	404
CC923-6N100	15	01227	404
CC923-1H175	69	37279	431

See report on indicated page for complete detail



**Candela Distribution**

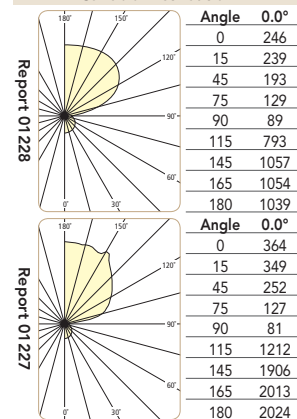

Surface Mounted Ballast Canopy  
 Additional structural blocking (by others) required with Surface Mounted Ballast Canopy (SBC) option



**Structural Blocking Detail**

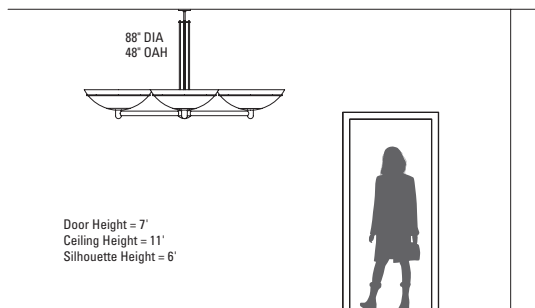



CC922-GSIL

## COMPANIONS



## FEATURES

- 5 year product warranty
- Rolled metal accent rings
- Solid machined metal fonts with cast center hub and extruded arms
- Oven cured no VOC acrylic powder coat for painted finishes; oven cured low VOC clear coat on metal finishes
- Thermally formed 1/8" thick white acrylic diffuser with matte finish, UV stable, UL-94 HB Flame Class rated
- Easy tool-less relamping
- Fluorescent, HID or incandescent lamping
- Use coated lamps for HID or incandescent applications
- Clear tempered prismatic glass top lens standard with HID lamping
- High power factor electronic ballast (fluorescent lamping)
- Remote high power factor ballast standard for HID lamping
- Mounts through 4" X 2-3/16" octagonal (deep) standard electrical junction box (by others) to structural blocking (by others) with provided hardware for ceiling slopes up to 45 degrees from horizontal

## SUGGESTED VARIATIONS

- Specialty finishes to match architectural detail
- Mix and match accents and trim from other product designs
- Smaller or larger scale acrylic diffuser
- Can be configured with 2, 3 or 5 arms
- Increase or decrease overall fixture diameter
- Alternate lamping up to rated wattage listed
- Add fluorescent dimming ballast
- Include fused circuit protection
- Wire for multi-level switching
- Sloped ceiling adapter for ceiling slopes greater than 45 degrees
- Can be configured to accommodate lowering system mounting (by others)
- Weather Tether to secure fixture from wind or excess movement. Safety requirement for all outdoor covered applications



Approved for indoor damp locations.  
Metal finishes require DCC (damp clear coat) for 5 year warranty