


SAMPLE CATALOG NUMBER

CC1056 - 32LF13(MVOLT) - SUNG - TL - OAH(48)
 Model Lamping Option (Voltage) Finish Option Option

Model			Lamping Options		Finish		Options	
Model Number	Dimensions							
CC1056	DIA	73" (1854 mm)	32LF13		PTD	CB	ABA	QRS
	OAH	48" (1219 mm)	32TF26		BA	PB	DCC	SBC
	NBS	23x8" (584x203 mm)	24N100		BCA	SN	FUSE	TL
			4N300		BCB	SNA	OAH	
			4H175					
CC1057	DIA	90" (2286 mm)	32LF13	24N100	PTD	CB	ABA	OAH
	OAH	48" (1219 mm)	32QF26	4N300	BA	PB	DCC	QRS
	NBS	31x10" (787x254 mm)	※32TF42	4H175	BCA	SN	DIM-A	SBC
					BCB	SNA	DIM-L	TL
						FUSE		

LINE DRAWINGS



ABBREVIATION KEY

※ Configuration operates TF26, TF32 or TF42 lamp options and can be labeled up to the highest wattage allowed
 Note: DIM-A and DIM-L are wattage specific

Dimensions

DIA Diameter
OAH Overall Height
NBS Nominal Bowl Size

Lamping Options (Voltage)

LF13 13w twin tube 4-pin, 2GX7 base, FLR (MVOLT)
QF26 26w quad, 4-pin GX24q-3 base, FLR (MVOLT; 347V)
※TF26 26w triple, 4-pin GX24q-3 base, FLR (MVOLT; 347V)
※TF32 32w triple, 4-pin GX24q-3 base, FLR (MVOLT; 347V)
※TF42 42w triple, 4-pin GX24q-4 base, FLR (MVOLT; 347V)
N100 100w A-19, medium base, INC (120V)
N300 300w PS-25, medium base, INC (120V)
H175 175w ED-17, medium base, MH (MTAP; 347V)

Specify Voltage, MVOLT or MTAP
 MVOLT is a ballast that operates 120V through 277V
 MTAP is a ballast that operates 120V or 277V

Finishes (see inside back cover)

PTD Painted - specify color code (ex. BRNZ for Bronze)
BA Brushed Aluminum
BCA Brushed Chrome Alternative
BCB Brushed Chrome
CB Polished Chrome
PB Polished Brass
SN Satin Nickel
SNA Satin Nickel Alternative

Options

ABA Hand Painted Alabaster Alternative
DCC Damp clear coat required for all metal finishes in damp locations
DIM-A Fluorescent dimming, Advance Mark 10, specify voltage (available with QF or TF lampping)
DIM-L Fluorescent dimming, Lutron Compact SE, specify voltage (available with QF or TF lampping)
FUSE Fusing, specify 120V or 277V
OAH Overall height variation from standard. Include desired height in inches. (ex. OAH(48) will produce an overall fixture height of 48")
QRS Quartz restrike, 100w T4 dc bayonet base (in one bowl only)
SBC Surface mounted ballast canopy for HID lampping
TL Top lens, tempered prismatic glass

PHOTOMETRICS and BIM


Complete BIM (Building Information Modeling) and photometric files for these models may be downloaded from www.visalighting.com

Reports (per arm)


IES File Number	LER	Report	page
CC1056-8LF13	46	01228	404
CC1056-6N100	91	01227	404
CC1056-1H175	69	37279	431
CC1057-8LF13	46	01228	404
CC1057-8QF26	45	01111	404
CC1057-6N100	91	01227	404
CC1057-1H175	69	37279	431

See report on indicated page for complete detail



Candela Distribution

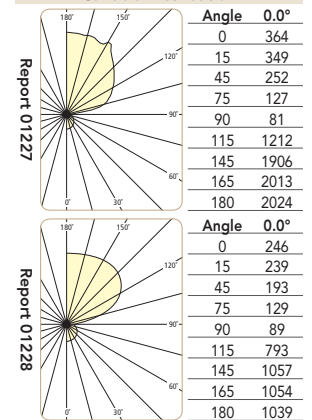

Surface Mounted Ballast Canopy
 Additional structural blocking (by others) required with Surface Mounted Ballast Canopy (SBC) option



Structural Blocking Detail

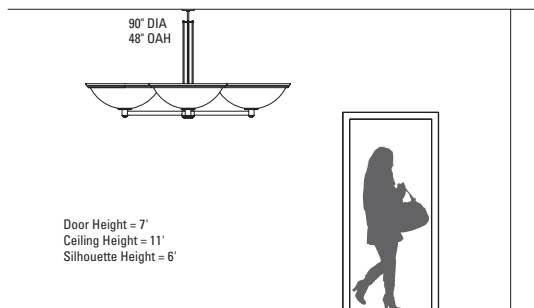



CC1056-SUNG

COMPANIONS



FEATURES

- 5 year product warranty
- Solid machined metal fonts with cast center hub and extruded arms
- Oven cured no VOC acrylic powder coat for painted finishes; oven cured low VOC clear coat on metal finishes
- Thermally formed 1/8" thick white acrylic diffuser with matte finish, UV stable, UL-94 HB Flame Class rated
- Clear tempered prismatic glass top lens standard with HID lamping
- Easy tool-less relamping
- Fluorescent, incandescent or HID lamping
- Use coated lamps for HID or incandescent applications
- High power factor electronic ballast (fluorescent lamping)
- Remote high power factor ballast standard for HID lamping
- Mounts through 4" X 2-3/16" octagonal (deep) standard electrical junction box (by others) to structural blocking (by others) with provided hardware for ceiling slopes up to 45 degrees from horizontal

SUGGESTED VARIATIONS

- Specialty finishes to match architectural detail
- Mix and match accents and trim from other product designs
- Smaller or larger scale acrylic diffuser
- Can be configured with 2, 3 or 5 arms
- Increase or decrease overall fixture diameter
- Alternate lamping up to rated wattage listed
- Wire for multi-level switching
- Sloped ceiling adapter for ceiling slopes greater than 45 degrees
- Can be configured to accommodate lowering system mounting (by others)
- Weather Tether to secure fixture from wind or excess movement. Safety requirement for all outdoor covered applications
- Alternate dimming options



Approved for indoor damp locations.
Metal finishes require DCC (damp clear coat) for 5 year warranty