


**SAMPLE CATALOG NUMBER**

CC1060 - 32LF13(MVOLT) - AG7038 - TL - OAH(48)  
 Model Lamping Option (Voltage) Finish Option Option

Model			Lamping Options		Finish		Options	
Model Number	Dimensions							
<b>CC1060</b>	DIA	73" (1854 mm)	32LF13		PTD	CB	ABA	QRS
	OAH	48" (1219 mm)	32TF26		BA	PB	DCC	SBC
	NBS	23x8" (584x203 mm)	24N100		BB	SN	FUSE	TL
			4N300		BCA	SNA	OAH	
			4H175		BCB			
<b>CC1061</b>	DIA	90" (2284 mm)	32LF13	24N100	PTD	CB	ABA	OAH
	OAH	48" (1219 mm)	32QF26	4N300	BA	PB	DCC	QRS
	NBS	31x10" (787x203 mm)	※32TF42	4H175	BB	SN	DIM-A	SBC
					BCA	SNA	DIM-L	TL
					BCB		FUSE	

**LINE DRAWINGS**



**ABBREVIATION KEY**

※ Configuration operates TF26, TF32 or TF42 lamp options and can be labeled up to the highest wattage allowed

**Dimensions**

DIA Diameter  
 OAH Overall Height  
 NBS Nominal Bowl Size

**Lamping Options (Voltage)**

LF13 13w twin tube 4-pin, 2GX7 base, FLR (MVOLT)  
 QF26 26w quad, 4-pin G24q-3 base, FLR (MVOLT; 347V)  
 ※TF26 26w triple, 4-pin GX24q-3 base, FLR (MVOLT; 347V)  
 ※TF32 32w triple, 4-pin GX24q-3 base, FLR (MVOLT; 347V)  
 ※TF42 42w triple, 4-pin GX24q-4 base, FLR (MVOLT; 347V)  
 N100 100w A-19, medium base, INC (120V)  
 N300 300w PS-25, medium base, INC (120V)  
 H175 175w ED-17, medium base, MH (MTAP; 347V)

Specify Voltage, MVOLT or MTAP  
 MVOLT is a ballast that operates 120V through 277V  
 MTAP is a ballast that operates 120V or 277V

**Finishes (see inside back cover)**

PTD Painted - specify color code (ex. BRNZ for Bronze)  
 BA Brushed Aluminum  
 BB Brushed Brass  
 BCA Brushed Chrome Alternative  
 BCB Brushed Chrome  
 CB Polished Chrome  
 PB Polished Brass  
 SN Satin Nickel  
 SNA Satin Nickel Alternative

**Options**

ABA Hand Painted Alabaster Alternative  
 DCC Damp clear coat required for all metal finishes in damp locations  
 DIM-A Fluorescent dimming, Advance Mark 10, specify voltage (available with QF or TF lamping)  
 DIM-L Fluorescent dimming, Lutron Compact SE, specify voltage (available with QF or TF lamping)  
 FUSE Fusing, specify 120V or 277V  
 OAH Overall height variation from standard. Include desired height in inches. (ex. OAH(48) will produce an overall fixture height of 48")  
 QRS Quartz restrike, 100w T4 dc bayonet base (in one bowl only)  
 SBC Surface mounted ballast canopy for HID lamping  
 TL Top lens, tempered prismatic glass

**PHOTOMETRICS and BIM**


Complete BIM (Building Information Modeling) and photometric files for these models may be downloaded from [www.visalighting.com](http://www.visalighting.com)

**Reports (per arm)**

IES File Number	LER	Report	page
CC1060-8LF13	46	01228	404
CC1060-6N100	91	01227	404
CC1060-1H175	69	37279	431
CC1061-8LF13	46	01228	404
CC1061-8QF26	45	01111	404
CC1061-6N100	91	01227	404
CC1061-1H175	69	37279	431




See report on indicated page for complete detail

**Candela Distribution**

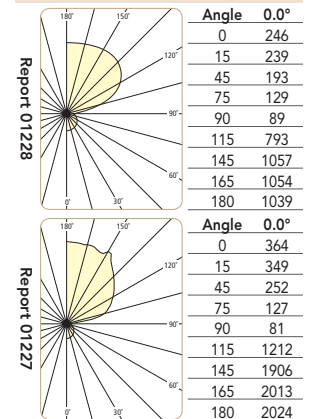

Surface Mounted Ballast Canopy  
 Additional structural blocking (by others) required with Surface Mounted Ballast Canopy (SBC) option

Structural Blocking Detail

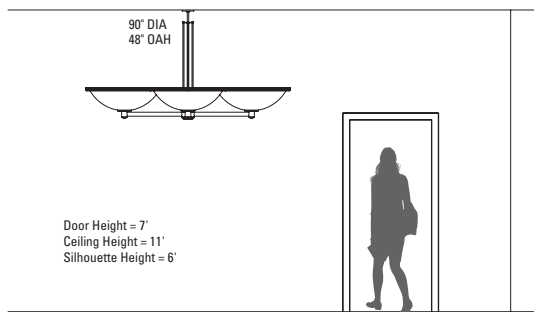

# OLYMPIA™

INDOOR

DECORATIVE AND PERFORMANCE



CC1060-AG7038

## FEATURES

- 5 year product warranty
- Heavy gauge spun metal accents
- Solid machined metal fonts with cast center hub and extruded arms
- Oven cured no VOC acrylic powder coat for painted finishes; oven cured low VOC clear coat on metal finishes
- Thermally formed 1/8" thick white acrylic diffuser with matte finish, UV stable, UL-94 HB Flame Class rated
- Easy tool-less relamping
- Fluorescent, incandescent or HID lamping
- Use coated lamps for HID or incandescent applications
- Clear tempered prismatic glass top lens standard with HID lamping
- High power factor electronic ballast (fluorescent lamping)
- Remote high power factor ballast standard for HID lamping
- Mounts through 4" X 2-3/16" octagonal (deep) standard electrical junction box (by others) to structural blocking (by others) with provided hardware for ceiling slopes up to 45 degrees from horizontal

## COMPANIONS



## SUGGESTED VARIATIONS

- Specialty finishes to match architectural detail
- Mix and match accents and trim from other product designs
- Can be configured with 2, 3 or 5 arms
- Alternate lamping up to rated wattage listed
- Wire for multi-level switching
- Sloped ceiling adapter for ceiling slopes greater than 45 degrees
- Can be configured to accommodate lowering system mounting (by others)
- Weather Tether to secure fixture from wind or excess movement. Safety requirement for all outdoor covered applications
- Alternate dimming options



Approved for indoor damp locations.  
Metal finishes require DCC (damp clear coat) for 5 year warranty

PENDANT