


SAMPLE CATALOG NUMBER

CP4626	-	4F40(MVOLT)	-	PB1035	-	CB	-	TL	-	OAH(36)
Model Number		Lamping Option (Voltage)		Housing, Canopy and Stem Finish		Trim Finish		Option		Option


Model		Lamping Options			Finish			Options						
Model Number	Dimensions			Housing, Canopy and Stem			Trim							
Multi-Stem CP4620	W	30"	(762 mm)	4F39	4CH20T4	PTD			PTD	• CB	DCC	OAH	SSV	
	OAH	36"	(914 mm)	4QF26	4CH39T4				BA	PB	• DIM-A	QRS	• TL	
	X	8-1/8"	(206 mm)	※4TF42	4CH70T4				BB	SNA	• DIM-L	SBC	XPS	
				1H175	4T250				BCA		FUSE			
Multi-Stem CP4622	W	40-7/8"	(1038 mm)	4F40	8QF26	4CH20T4	PTD			PTD	• CB	DCC	OAH	SSV
	OAH	42"	(1067 mm)	4F50	※8TF42	4CH39T4				BA	PB	• DIM-L	QRS	• TL
	X	12"	(305 mm)	8F39	1H175	4CH70T4				BB	SNA	FUSE	SBC	XPS
				8F40	1H250	4T250				BCA		IEM		
				8F50	1H400									
Power Art Cable™ CP4624	W	30"	(762 mm)	4F39	4CH39T4	PTD			PTD	• CB	DCC	FUSE	SBC	
	OAH	36"	(914 mm)	4QF26	4CH70T4				BA	PB	• DIM-A	OAH	• TL	
	X	8-1/8"	(206 mm)	※4TF42	4T250				BB	SNA	• DIM-L	• QRS	XPS	
			4CH20T4					BCA						
Power Art Cable™ CP4626	W	40-7/8"	(1038 mm)	4F40	8F50	4CH39T4	PTD			PTD	• CB	DCC	IEM	SBC
	OAH	42"	(1067 mm)	4F50	8QF26	4CH70T4				BA	PB	• DIM-L	OAH	• TL
	X	12"	(305 mm)	8F39	※8TF42	4T250				BB	SNA	FUSE	QRS	XPS
				8F40	4CH20T4					BCA				

LINE DRAWINGS

Multi-Stem
CP4620 / CP4622



Power Art Cable™
CP4624 / CP4626



Power Art Cable™ Patent Pending


Surface Mounted
Ballast Canopy (SBC)




Up to 250w - 14-3/4" x 7" high
Up to 400w - 17-1/4" x 7" high

Structural Blocking Detail

Additional structural blocking (by others) required for CP4622 and CP4626



Special support yoke provided for fixture applications over 50 lbs. See www.visalighting.com for more installation details.

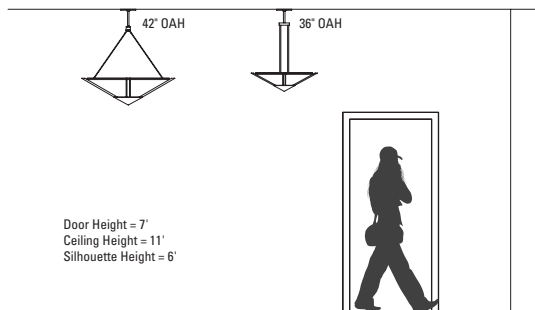

ABBREVIATION KEY

- Indicated Finish or Option is not available with XPS
- ※ Configuration operates TF26, TF32 or TF42 lamp options and can be labeled up to the highest wattage allowed

Dimensions

W	Width
OAH	Overall Height
X	Housing Height

Lamping Options (Voltage)

F39	39w long twin tube, 2G11 base, FLR	(MVOLT; 347V)
F40	40w long twin tube, 2G11 base, FLR	(MVOLT)
F50	50w long twin tube, 2G11 base, FLR	(MVOLT; 347V)
QF26	26w quad, 4-pin GX24q-3 base, FLR	(MVOLT; 347V)
※TF26	26w triple, 4-pin GX24q-3 base, FLR	(MVOLT; 347V)
※TF32	32w triple, 4-pin GX24q-3 base, FLR	(MVOLT; 347V)
※TF42	42w triple, 4-pin GX24q-4 base, FLR	(MVOLT; 347V)
H175	175w ED-17, medium base, MH	(MTAP; 347V)
H250	250w ED-28, mogul base, MH	(MTAP; 347V)
H400	400w ED-28, mogul base, MH	(MTAP; 347V)
CH20T4	20w T-4, G8.5 base, ceramic MH	(MVOLT)
CH39T4	39w T-4, G8.5 base, ceramic MH	(MVOLT)
CH70T4	70w T-4, G8.5 base, ceramic MH	(MVOLT)
T250	250w T-4, mini-can base, halogen	(120V)

Specify Voltage, MVOLT or MTAP
MVOLT is a ballast that operates 120V through 277V
MTAP is a ballast that operates 120V or 277V

Finishes (see inside back cover)

PTD	Painted - specify color code (ex. BRNZ for Bronze)
BA	Brushed Aluminum
BB	Brushed Brass
BCA	Brushed Chrome Alternative
• CB	Polished Chrome
PB	Polished Brass
SNA	Satin Nickel Alternative

Options

DCC	Damp clear coat required for all metal finishes in damp locations
• DIM-A	Fluorescent dimming, Advance Mark 10, specify 120V or 277V
• DIM-L	Fluorescent dimming, Lutron Eco-10, specify 120V or 277V
FUSE	Fusing, specify 120V or 277V
IEM	Integral emergency battery pack, specify voltage
OAH	Overall height variation from standard. Include desired height in inches. (ex. OAH(36) will produce an overall fixture height of 36")
QRS	Quartz restrrike, 100w T4 dc bayonet base
SBC	Surface mounted ballast canopy for HID lampping
SSV	Square sleeve over center stem
• TL	Top lens, tempered prismatic glass (not available with dimming with TF42 lamp; not available with T250 or CH lampping)
XPS	Express 10 day shipping

PHOTOMETRICS and BIM


Complete BIM (Building Information Modeling) and photometric files for these models may be downloaded from www.visalighting.com

Reports

IES File Number	LER	Report	page
CP4620-4F39	61	05315	411
CP4620-4QF26	56	05316	411
CP4620-4TF42	52	05314	411
CP4620-1H175	42	05317	411
CP4620-4CH70T4	49		
CP4622-8F50	60	05024	410
CP4622-1H175	42	05317	411
CP4622-1H400	48		
CP4622-4CH70T4	49		
CP4624-4F39	61	05315	411
CP4624-4QF26	56	05316	411
CP4624-4TF42	52	05314	411
CP4626-4CH70T4	49		
CP4626-8F50	60	05024	410
CP4626-4CH70T4	49		


See report on indicated page for complete detail


Candela Distribution



XPOPTICS™

T4 lampping includes high performance XP Optics module of specular extruded aluminum with integral borosilicate glass lens. +/- 10° tilt provided for upright aiming. Use clear lamp for maximum optical performance.



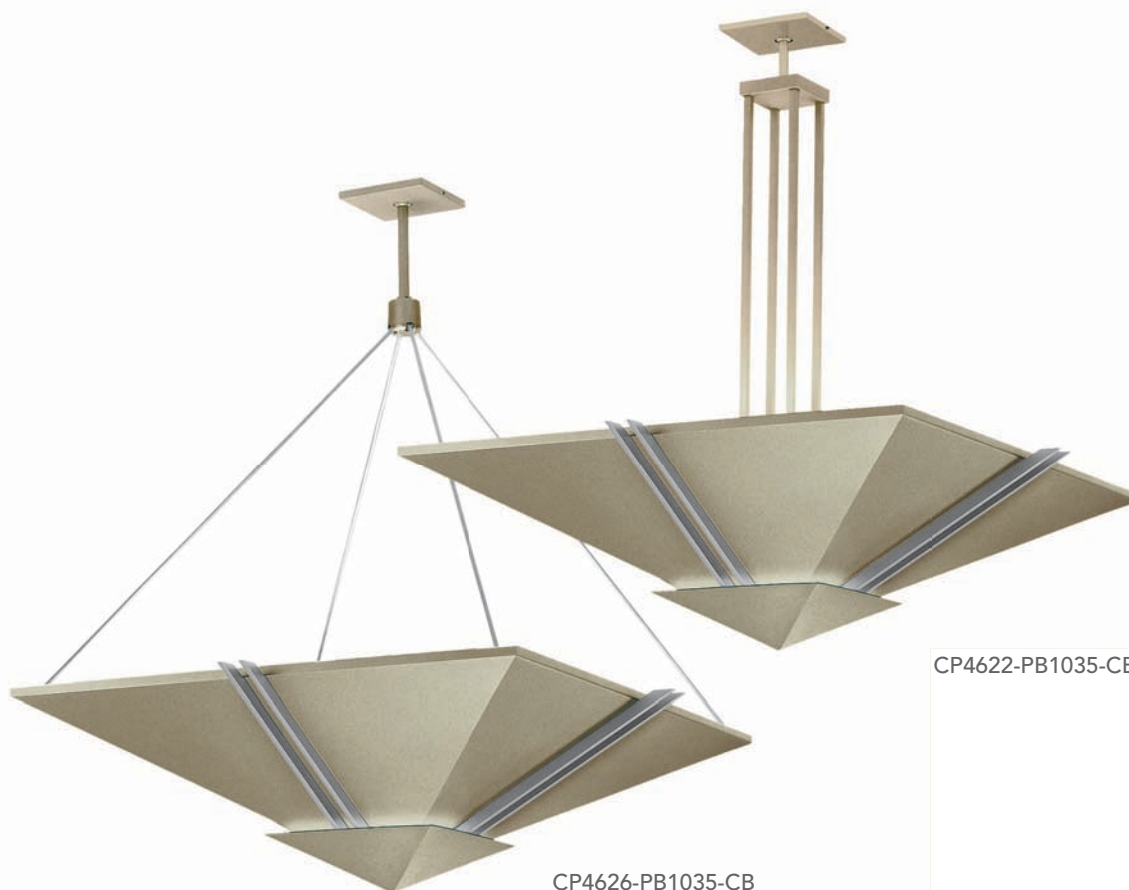


CP4622-PB1035-CB

CP4626-PB1035-CB
(Power Art Cable™)

FEATURES

- 5 year product warranty
- Fabricated and welded metal housing
- UL approved Power Art Cable™ mounting system (patent pending) uses a braided stainless steel jacket to encapsulate power conductors and provide support with configurations rated for loads up to 150lbs
- Oven cured no VOC acrylic powder coat for painted finishes; oven cured low VOC clear coat on metal finishes
- Easy tool-less relamping
- Fluorescent, HID or Tungsten Halogen lamping
- Use coated lamps for HID applications
- Specular aluminum reflector standard with fluorescent or HID lamping
- XP Optics™. Extruded aluminum high performance reflector system for maximum efficiency. Reflectors are computer optimized for maximum forward throw and produce smooth, uniform surface illumination for tungsten halogen and ceramic metal halide lamping.
- Integral high power factor electronic ballast (fluorescent and HID "CH" lamping)
- Remote mounted high power factor HID ballast standard for "H" or "PH" lamping
- Clear tempered prismatic glass top lens standard with HID lamping
- Mounts to standard electrical junction box (by others) for sloped ceiling up to 45 degrees from horizontal. Structural blocking with a 4" octagonal by 2-3/16" deep junction box (by others) is required for CP4622 and CP4626

COMPANIONS

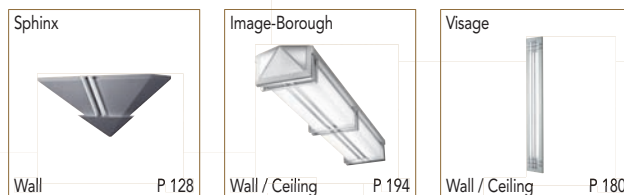

SUGGESTED VARIATIONS

- Specialty finishes to match architectural detail
- Custom window cutout in housing
- Mix and match accents and trim from other product designs
- Wire for multi-level switching
- Sloped ceiling adapter for ceiling slopes greater than 45 degrees
- Can be configured to accommodate lowering system mounting (by others)
- Add remote emergency battery pack for fluorescent lamping
- Weather Tether to secure fixture from wind or excess movement. Safety requirement for all outdoor covered applications



Approved for indoor damp locations.
Metal finishes require DCC (damp clear coat) for 5 year warranty