


**SAMPLE CATALOG NUMBER**

CP4820	-	6N60-1N150PAR38(120V)	-	SUNG	-	OBRZ	XPS	-	OAH(42)
Model Number		Lamping Option (Voltage)		Housing Finish		Accent Panel Finish	Option		Option

Model		Lamping Options		Finish		Diffuser Options		Options			
Model Number	Dimensions	Bodylight - Downlight		Housing	Accent Panel						
<b>CP4840</b>	W	5-1/2"	(140 mm)	1LF13	PTD	BU	PTD	• ABA	• SL	DCC	TR
	OAH	36"	(914 mm)	1QF26	BA	BZ		• AR	• SR	OAH	XPS
	X	12-3/8"	(314 mm)	1N100	BB	• VG		• PP		SSV	
<b>CP4850</b>	W	7"	(178 mm)	2QF26	PTD	BU	PTD	• ABA	• SL	DCC	TR
	OAH	36"	(914 mm)	1N150	BA	BZ		• AR	• SR	OAH	XPS
	X	15-1/2"	(394 mm)		BB	• VG		• PP		SSV	
<b>CP4800</b>	W	20"	(508 mm)	4F27	PTD		PTD	• ABA	• SL	DCC	• TL
	OAH	24"	(610 mm)		BA			• AR	• SR	OAH	• XPS
	X	6"	(152 mm)		BB			• PP		SSV	
<b>CP4810</b>	W	33"	(838 mm)	8F27	PTD		PTD	• ABA	• SL	DCC	• TL
	OAH	30"	(762 mm)		BA			• AR	• SR	OAH	• XPS
	X	6"	(152 mm)		BB			• PP		SSV	
<b>CP4820</b>	W	10"	(254 mm)	4F39 - 1N150PAR38	PTD	BU	PTD	• ABA	• SL	DCC	OAH
	OAH	42"	(1067 mm)	6N60 - 1N150PAR38	BA	BZ		• AR	• SR	• DIM-A	SSV
	X	24"	(610 mm)		BB	• VG		• PP		• DIM-L	XPS
<b>CP4830</b>	W	11-7/8"	(302 mm)	4F40 - 1N250PAR38	PTD	BU	PTD	• ABA	• SL	DCC	OAH
	OAH	48"	(1219 mm)	9N60 - 1N250PAR38	BA	BZ		• AR	• SR	• DIM-A	SSV
	X	30"	(762 mm)		BB	• VG		• PP		• DIM-L	XPS

**LINE DRAWINGS**

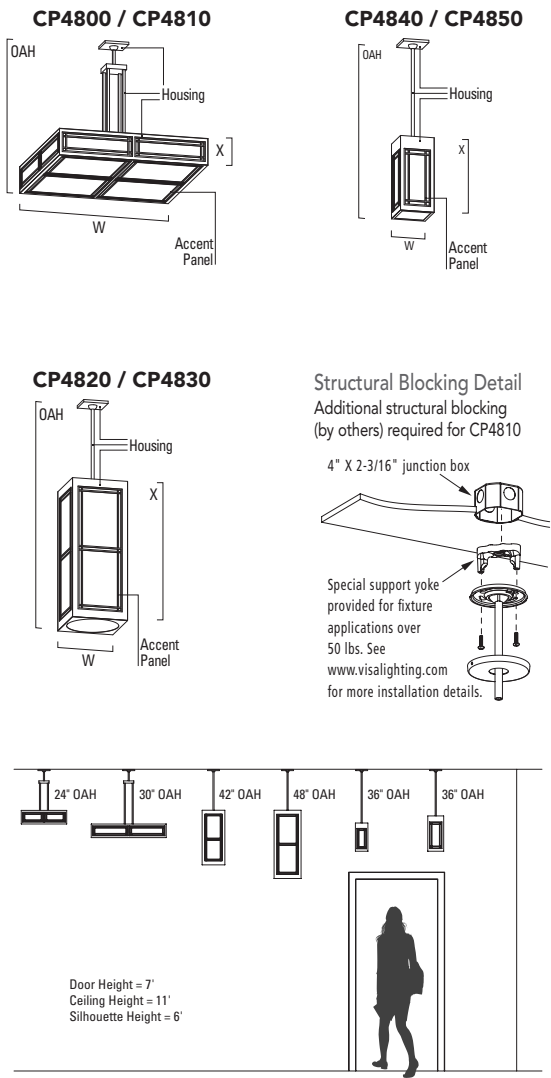

**ABBREVIATION KEY**


- Indicated Finish or Option is not available with XPS
- | Dimensions |                |
|------------|----------------|
| W          | Width          |
| OAH        | Overall Height |
| X          | Housing Height |
- | Lamping Options (Voltage) |                                                  |
|---------------------------|--------------------------------------------------|
| F27                       | 27w long twin tube, 2G11 base, FLR (MVOLT; 347V) |
| F39                       | 39w long twin tube, 2G11 base, FLR (MVOLT; 347V) |
| F40                       | 40w long twin tube, 2G11 base, FLR (MVOLT)       |
| LF13                      | 13w twin tube 4-pin, 2GX7 base, FLR (MVOLT)      |
| QF26                      | 26w quad, 4-pin G24q-3 base, FLR (MVOLT; 347V)   |
| N60                       | 60w A-19, medium base, INC (120V)                |
| N100                      | 100w A-19, medium base, INC (120V)               |
| N150                      | 150w A-21, medium base, INC (120V)               |
| N150PAR38                 | 150w PAR38, medium base, INC (120V; 277V*)       |
| N250PAR38                 | 250w PAR38, medium base, INC (120V; 277V*)       |
- Specify Voltage or MVOLT  
MVOLT is a ballast that operates 120V through 277V  
\*Fixture contains an integral step down transformer
- | Diffuser Options (see inside back cover) |                                    |
|------------------------------------------|------------------------------------|
| • ABA                                    | Hand Painted Alabaster Alternative |
| • AR                                     | Arctic Crush Lumicor®              |
| • PP                                     | Paper Leaf Lumicor®                |
| • SL                                     | Silver Spun Lumicor®               |
| • SR                                     | Saffron Taipei Lumicor®            |
- Note: White acrylic diffuser is standard unless other diffuser option is specified
- | Finishes (see inside back cover) |                                                    |
|----------------------------------|----------------------------------------------------|
| PTD                              | Painted - specify color code (ex. BRNZ for Bronze) |
| BA                               | Brushed Aluminum                                   |
| BB                               | Brushed Brass                                      |
| BU                               | Brushed Copper                                     |
| BZ                               | Brushed Bronze                                     |
| • VG                             | Verdigris Patina over Copper                       |
- | Options |                                                                                                                                       |
|---------|---------------------------------------------------------------------------------------------------------------------------------------|
| DCC     | Damp clear coat required for all metal finishes in damp locations                                                                     |
| • DIM-A | Fluorescent dimming, Advance Mark 10 (F39 only), specify voltage                                                                      |
| • DIM-L | Fluorescent dimming, Lutron Eco-10, specify voltage                                                                                   |
| OAH     | Overall height variation from standard. Include desired height in inches. (ex. OAH(42) will produce an overall fixture height of 42") |
| SSV     | Square sleeve over center stem                                                                                                        |
| • TL    | Top lens, prismatic acrylic                                                                                                           |
| TR      | Top aluminum cast roof (specify paint color)                                                                                          |
| • XPS   | Express 10 day shipping                                                                                                               |

**PHOTOMETRICS and BIM**

Complete BIM (Building Information Modeling) and photometric files for these models may be downloaded from [www.visalighting.com](http://www.visalighting.com)

Reports			
IES File Number	LER	Report	page
CP4800-4F27	47	08075	416
CP4810-8F27			47
CP4820-4F39	37	08060	416
CP4820-4F39-1N150	27	08062	416
CP4830-4F40	50	08063	416
CP4830-4F40-1N250	24	08065	416
CP4840-1QF26	30	01992	407
CP4850-2QF26			27

See report on indicated page for complete detail

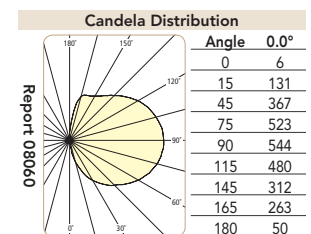

## MIDLAND CRAFTS™



## FEATURES

- 5 year product warranty
- Fabricated metal housing with internal reinforcing corner extrusions
- Diffuser accent panel creates a three dimensional effect
- Oven cured no VOC acrylic powder coat for painted finishes; oven cured low VOC clear coat on metal finishes
- 1/8" thick white acrylic diffuser with matte finish, UV stable, UL-94 HB Flame Class rated
- Easy tool-less relamping
- Fluorescent or incandescent lamping
- Optional specialty diffuser materials available, including some Lumicor® recyclable resin materials
- PAR38 downlight (CP4820 and CP4830)
- High power factor electronic ballast (fluorescent lamping)
- Spun downlight baffle trim, painted white (CP4820 and CP4830)
- Wired for dual circuit (bodylight/downlight) operation (CP4820 and CP4830)
- 277V option includes integral 277/120V step-down transformer for PAR downlight (CP4820 and CP4830)
- Mounts to standard electrical junction box (by others) for sloped ceiling up to 45 degrees from horizontal. Structural blocking with a 4" octagonal by 2-3/16" deep junction box (by others) is required for CP4810

## COMPANIONS



## SUGGESTED VARIATIONS

- Specialty finishes to match architectural detail
- Custom window cutout in housing
- Increase or decrease body height or width
- Silk screened logo on window panels
- Alternate lamping up to rated wattage listed
- Can accommodate Metal Halide PAR downlight up to 150w with remote ballast (CP4820 and CP4830)
- Eliminate downlight (CP4820 and CP4830)
- Add integral emergency battery pack (CP4830 only)
- Include fused circuit protection
- Sloped ceiling adapter for ceiling slopes greater than 45 degrees
- Weather Tether to secure fixture from wind or excess movement. Safety requirement for all outdoor covered applications



Approved for indoor damp locations.  
Metal finishes require DCC (damp clear coat) for 5 year warranty