


SAMPLE CATALOG NUMBER									
CP4636	-	2QF26(MVOLT)	-	OBRZ	-	XPS	-	OAH(36)	
Model		Lamping Option (Voltage)		Finish		Option		Option	


Model		Lamping Options			Finish		Options						
Model Number	Dimensions												
CP4630	W	5-1/2"	(140 mm)	1LF13	PTD	BU	DCC	TR					
	OAH	36"	(914 mm)						1QF26	BA	BZ	OAH	XPS
	X	12-1/2"	(318 mm)										
CP4632	W	7"	(178 mm)	2QF26	PTD	BU	DCC	TR					
	OAH	36"	(914 mm)						1N150	BA	BZ	OAH	XPS
	X	15-1/2"	(394 mm)										
CP4634	W	5-1/2"	(140 mm)	1LF13	PTD	BU	DCC	TR					
	OAH	36"	(914 mm)						1QF26	BA	BZ	OAH	XPS
	X	12-1/2"	(318 mm)										
CP4636	W	7"	(178 mm)	2QF26	PTD	BU	DCC	TR					
	OAH	36"	(914 mm)						1N150	BA	BZ	OAH	XPS
	X	15-1/2"	(394 mm)										
CP4638	W	5-1/2"	(140 mm)	1LF13	PTD	BU	DCC	TR					
	OAH	36"	(914 mm)						1QF26	BA	BZ	OAH	XPS
	X	12-1/2"	(318 mm)										
CP4640	W	7"	(178 mm)	2QF26	PTD	BU	DCC	TR					
	OAH	36"	(914 mm)						1N150	BA	BZ	OAH	XPS
	X	15-1/2"	(394 mm)										

LINE DRAWINGS



CP4630 / CP4632



CP4634 / CP4636



CP4638 / CP4640

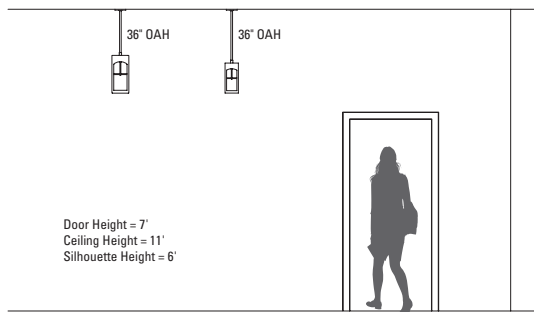

ABBREVIATION KEY

• Indicated Finish or Option is not available with XPS

Dimensions	
W	Width
OAH	Overall Height
X	Body Height

Lamping Options (Voltage)	
LF13	13w twin tube 4-pin, 2GX7 base, FLR (MVOLT)
QF26	26w quad, 4-pin G24q-3 base, FLR (MVOLT; 347V)
N100	100w A-19, medium base, INC (120V)
N150	150w A-21, medium base, INC (120V)

Specify Voltage or MVOLT
MVOLT is a ballast that operates 120V through 277V

Finishes (see inside back cover)	
PTD	Painted - specify color code (ex. BRNZ for Bronze).
BA	Brushed Aluminum
BB	Brushed Brass
BU	Brushed Copper
BZ	Brushed Bronze
• VG	Verdigris Patina over Copper

Options	
DCC	Damp clear coat required for all metal finishes in damp locations
OAH	Overall height variation from standard. Include desired height in inches. (ex. OAH(36) will produce an overall fixture height of 36")
SSV	Square Stem Sleeve
TR	Top aluminum cast roof (specify paint color)
XPS	Express 10 day shipping


PHOTOMETRICS and BIM

Complete BIM (Building Information Modeling) and photometric files for these models may be downloaded from www.visalighting.com

Reports		
IES File Number	LER	Report page
CP4630-1QF26	30	01992 407
CP4632-2QF26	27	
CP4634-1QF26	30	01992 407
CP4636-2QF26	27	
CP4638-1QF26	30	01992 407
CP4640-2QF26	27	

See report on indicated page for complete detail

Candela Distribution



Top Aluminum Cast Roof (TR) Option



Square Stem Sleeve (SSV) Option



ST. GERMAIN™

INDOOR

DECORATIVE AND PERFORMANCE



CP4632-COPR



CP4636-OBRZ



CP4640-BSIL

COMPANIONS



SUGGESTED VARIATIONS

FEATURES

- 5 year product warranty
- Fabricated metal housing with internal reinforcing corner extrusions
- Internal shadow panel creates a three dimensional effect
- Oven cured no VOC acrylic powder coat for painted finishes; oven cured low VOC clear coat on metal finishes
- Clear tempered sandblasted glass side and bottom panels
- Easy tool-less relamping
- Fluorescent or incandescent lamping
- High power factor electronic ballast (fluorescent lamping)
- Mounts to standard electrical junction box (by others) for sloped ceiling up to 45 degrees from horizontal

- Specialty finishes to match architectural detail
- Increase or decrease body height and/or width
- Custom cutout or logo in housing panels
- Silk screened logo on window panels
- Hand Painted Alabaster Alternative or other specialty diffuser material
- Alternate lamping up to rated wattage listed
- Can accommodate metal halide lamping up to 70w with remote ballast
- Add fluorescent dimming ballast
- Add remote emergency battery pack
- Include fused circuit protection
- Sloped ceiling adapter for ceiling slopes greater than 45 degrees
- Can be configured to accommodate lowering system mounting (by others)
- Weather Tether to secure fixture from wind or excess movement. Safety requirement for all outdoor covered applications



Approved for indoor damp locations.
Metal finishes require DCC (damp clear coat) for 5 year warranty

PENDANT