


SAMPLE CATALOG NUMBER

OW1040 - 2QF13(MVOLT) - GY7005 - XPS
 Model Number Lamping Option (Voltage) Finish Option


Model				Lamping Options	Finish	Options
Model Number	Dimensions					
OW1040	W	7-1/4"	(184 mm)	2QF13 2N40	PTD • VG	REM XPS
	H	16"	(406 mm)			
	D	5-1/2"	(140 mm)			
	MC	8"	(203 mm)			
OW1042	W	9-1/4"	(235 mm)	3QF13 2N75	PTD • VG	REM XPS
	H	20-1/4"	(514 mm)			
	D	6"	(152 mm)			
	MC	10-1/8"	(257 mm)			
OW1044	W	7-1/4"	(184 mm)	2QF13 2N40	PTD • VG	REM XPS
	H	16"	(406 mm)			
	D	5-1/2"	(140 mm)			
	MC	8"	(203 mm)			
OW1046	W	9-1/4"	(235 mm)	3QF13 2N75	PTD • VG	REM XPS
	H	20-1/4"	(514 mm)			
	D	6"	(152 mm)			
	MC	10-1/8"	(257 mm)			

LINE DRAWINGS

OW1040 / OW1042



OW1044 / OW1046



ABBREVIATION KEY

- Indicated Finish or Option is not available with XPS

Dimensions

- W** Width
- H** Height
- D** Depth (measured from wall to front of fixture)
- MC** Mounting Center (measured from top of fixture to center of junction box)

Lamping Options (Voltage)

- QF13** 13w quad, 4-pin G24q-1 base, FLR (MVOLT; 347V)
- N40** 40w A-19, medium base, INC (120V)
- N75** 75w A-19, medium base, INC (120V)

Specify Voltage or MVOLT
 MVOLT is a ballast that operates 120V through 277V

Finishes (see inside back cover)

- PTD** Painted - specify color code (ex. BRNZ for Bronze)
- **VG** Verdigris Patina over Copper

Options

- XPS** Express 10 day shipping
- REM** Remote emergency battery pack for fluorescent lamping (rated for dry location, 32° F / 0° C minimum)

PHOTOMETRICS and BIM



Complete BIM (Building Information Modeling) and photometric files for these models may be downloaded from www.visalighting.com

Reports

IES File Number	LER	Report	page
OW1040-2QF13	32	33723	426
OW1040-2N40		9	
OW1042-2N75		12	
OW1044-2QF13	32	33723	426
OW1044-2N40		9	
OW1046-2N75		12	

See report on indicated page for complete detail

Candela Distribution

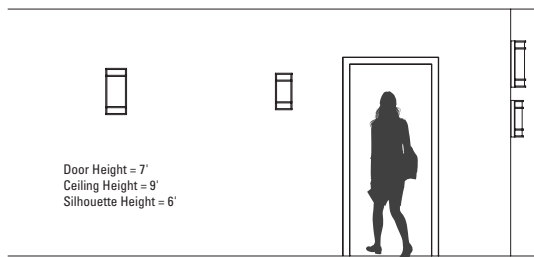

COLONNADE™

OUTDOOR

DECORATIVE AND PERFORMANCE

WALL



OW1040-GY7005





OW1044-GLIM

FEATURES

- 5 year product warranty
- Solid metal accent bars
- Sealed and gasketed construction
- Oven cured no VOC acrylic powder coat
- Fabricated 1/8" thick white acrylic diffuser, F1 rated, UV stable, UL-94 HB flame class rated
- Easy relamping
- Fluorescent or incandescent lampping
- High power factor electronic ballast, 0° F / -18° C starting temperature (fluorescent lampping)
- Mounts to standard electrical junction box (by others) with provided hardware
- UL wet location listed for mounting 4' above grade

COMPANIONS



SUGGESTED VARIATIONS

- Increase or decrease fixture height
- Add, delete or reposition accent bars
- Add perforated metal overlay
- Horizontal mounting
- Include fused circuit protection
- Can accommodate metal halide lampping up to 70w with remote ballast

