


SAMPLE CATALOG NUMBER

OW1062 - 2QF13(MVOLT) - VG - OBRZ - REM
 Model Number Lamping Option (Voltage) Housing Finish Top Roof and Arm Finish Option


| Model | | Lamping Options | | Finish | | Options |
|---------------|------------|------------------|--------------|-------------|------------------|------------|
| Model Number | Dimensions | | | Housing | Top Roof and Arm | |
| OW1060 | W | 7" (178 mm) | 1QF13 | PTD | PTD | REM |
| | H | 12-1/4" (311 mm) | 1QF26 | • VG | | XPS |
| | D | 7-3/4" (197 mm) | 2N60 | | | |
| | MC | 6-3/4" (171 mm) | 1PH70 | | | |
| OW1062 | W | 8-3/4" (222 mm) | 2QF13 | PTD | PTD | REM |
| | H | 15-3/8" (391 mm) | 2QF26 | • VG | | XPS |
| | D | 9-3/8" (238 mm) | 2N75 | | | |
| | MC | 8-3/8" (213 mm) | 1PH70 | | | |
| OW1064 | W | 7" (178 mm) | 1QF13 | PTD | PTD | REM |
| | H | 12-1/4" (311 mm) | 1QF26 | • VG | | XPS |
| | D | 7-3/4" (197 mm) | 2N60 | | | |
| | MC | 6-3/4" (171 mm) | 1PH70 | | | |
| OW1066 | W | 8-3/4" (222 mm) | 2QF13 | PTD | PTD | REM |
| | H | 15-3/8" (391 mm) | 2QF26 | • VG | | XPS |
| | D | 9-3/8" (238 mm) | 2N75 | | | |
| | MC | 8-3/8" (213 mm) | 1PH70 | | | |

LINE DRAWINGS

OW1060 / OW1062



OW1064 / OW1066



ABBREVIATION KEY

• Indicated Finish or Option is not available with XPS

| Dimensions | |
|------------|--|
| W | Width |
| H | Height |
| D | Depth (measured from wall to front of fixture) |
| MC | Mounting Center (measured from top of fixture to center of junction box) |

| Lamping Options (Voltage) | |
|---------------------------|---|
| QF13 | 13w quad, 4-pin G24q-1 base, FLR (MVOLT; 347V) |
| QF26 | 26w quad, 4-pin G24q-3 base, FLR (MVOLT; 347V) |
| N60 | 60w A-19, medium base, INC (120V) |
| N75 | 75w A-19, medium base, INC (120V) |
| PH70 | 70w ED-17, medium base, pulse start MH (MTAP; 347V) |

Specify Voltage, MVOLT or MTAP
 MVOLT is a ballast that operates 120V through 277V
 MTAP is a ballast that operates 120V or 277V

| Finishes (see inside back cover) | |
|----------------------------------|--|
| PTD | Painted - specify color code (ex. BRNZ for Bronze) |
| • VG | Verdigris Patina over Copper |

| Options | |
|------------|---|
| REM | Remote emergency battery pack for fluorescent lampping (rated for dry location, 32° F / 0° C minimum) |
| XPS | Express 10 day shipping |



PHOTOMETRICS and BIM

Complete BIM (Building Information Modeling) and photometric files for these models may be downloaded from www.visalighting.com

| Reports | | | |
|-----------------|-----|--------|------|
| IES File Number | LER | Report | page |
| OW1060-1QF26 | 29 | 01989 | 406 |
| OW1060-2N60 | 5 | 01991 | 407 |
| OW1062-2QF26 | 30 | 08016 | 415 |
| OW1062-2N75 | 6 | | |
| OW1064-1QF26 | 29 | 01989 | 406 |
| OW1064-2N60 | 5 | 01991 | 407 |
| OW1066-2QF26 | 30 | 08016 | 415 |
| OW1066-2N75 | 6 | | |

See report on indicated page for complete detail

Candela Distribution

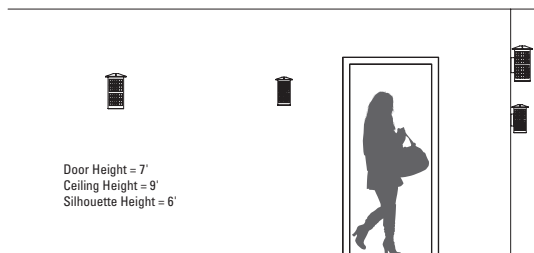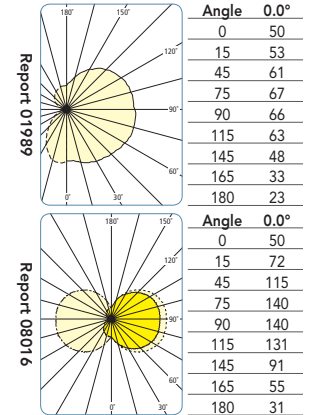

ST. GERMAIN™

OUTDOOR

DECORATIVE AND PERFORMANCE

WALL



OW1062-VG-OBZ




OW1066-BLH-BRNZ

FEATURES

- 5 year product warranty
- Multiple housing designs
- Fabricated metal housing with internal reinforcing corner extrusions
- Diffuser accent panel creates a three dimensional effect
- Cast aluminum top roof
- Clear tempered sandblasted glass side and bottom panels
- Oven cured no VOC acrylic powder coat
- Easy tool-less relamping
- Fluorescent, HID or incandescent lampping
- High power factor electronic ballast, 0° F / -18° C starting temperature (fluorescent lampping)
- Remote mounted HID ballast with long distance ignitor standard, 50' maximum ballast to lamp distance, PH70(347V) is 20' maximum
- Mounts to standard electrical junction box (by others) with provided hardware
- UL wet location listed for mounting 4' above grade

COMPANIONS

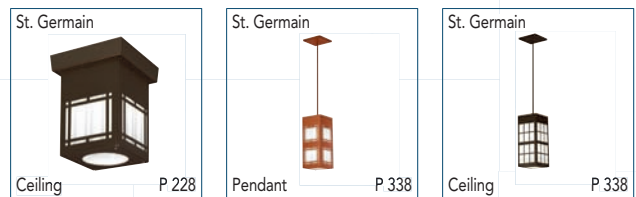

SUGGESTED VARIATIONS

- Specialty paint finishes to match architectural detail
- Custom cutout or logo in housing panels
- Vary fixture height
- Alternate lampping up to rated wattage listed

