


SAMPLE CATALOG NUMBER								
OW1734	-	1TF32(MVOLT)	-	BSIL	-	JB9005	-	XPS
Model Number		Lamping Option (Voltage)		Housing Finish		Accent Finish		Option


Model		Lamping Options		Finish		Options		
Model Number	Surface Mount Dimensions			Housing	Accent			
Surface Mount <b>OW1732</b>	W	14"	(356 mm)	※1TF32	1CH150T6	PTD	PTD	BCS
	H	14"	(356 mm)	1N150	1PH70			XPS
	D	8-5/8"	(219 mm)	1CH70T6	1PH100			
	MC	7"	(178 mm)					
Recessed Mount <b>OW1734</b>	W	14"	(356 mm)	※1TF32	1CH150T6	PTD	PTD	BCS
	H	14"	(356 mm)	1N150	1PH70			XPS
	D	4-3/4"	(121 mm)	1CH70T6	1PH100			
	RD	5-1/4"	(133 mm)					
	TF lamp	6-1/2"	(165mm)					
Surface Mount <b>OW1736</b>	W	18"	(457 mm)	※1TF32	1CH150T6	PTD	PTD	BCS
	H	18"	(457 mm)	1N150	1PH70			XPS
	D	8-5/8"	(219 mm)	1CH70T6	1PH100			
	MC	9"	(229 mm)					
Recessed Mount <b>OW1738</b>	W	18"	(457 mm)	※1TF32	1CH150T6	PTD	PTD	BCS
	H	18"	(457 mm)	1N150	1PH70			XPS
	D	4-3/4"	(121 mm)	1CH70T6	1PH100			
	RD	5-1/4"	(133 mm)					
	TF lamp	6-1/2"	(165mm)					
Surface Mount <b>OW1740</b>	W	14"	(356 mm)	※1TF32	1CH150T6	PTD		BCS
	H	14"	(356 mm)	1N150	1PH70			XPS
	D	12-5/8"	(321 mm)	1CH70T6	1PH100			
	MC	7"	(178 mm)					
Recessed Mount <b>OW1742</b>	W	14"	(356 mm)	※1TF32	1CH150T6	PTD		BCS
	H	14"	(356 mm)	1N150	1PH70			XPS
	D	8-3/4"	(222 mm)	1CH70T6	1PH100			
	RD	5-1/4"	(133 mm)					
	TF lamp	6-1/2"	(165mm)					

LINE DRAWINGS


OW1732 / OW1736





OW1734 / OW1738



OW1740



OW1742

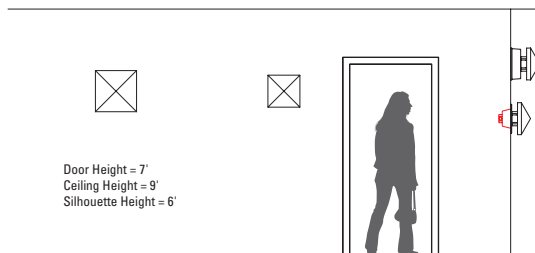

ABBREVIATION KEY

※ Configuration operates TF26 or TF32 lamp options and can be labeled up to the highest wattage allowed

Dimensions	
W	Width
H	Height
D	Depth (measured from wall to front of fixture)
RD	Recessed Depth
MC	Mounting Center (measured from top of fixture to center of junction box)

Lamping Options (Voltage)	
※TF26	26w triple, 4-pin GX24q-3 base, FLR (MVOLT; 347V)
※TF32	32w triple, 4-pin GX24q-3 base, FLR (MVOLT; 347V)
	TF lamping increases RD (recessed depth) dimension to 6-1/2"
N150	150w A-21, medium base, INC (120V)
CH70T6	70w T-6, G12 base, ceramic MH (MTAP; 347V)
CH150T6	150w T-6, G12 base, ceramic MH (MTAP; 347V)
PH70	70w ED-17, medium base, pulse start MH (MTAP; 347V)
PH100	100w ED-17, medium base, pulse start MH (MTAP; 347V)
	Specify Voltage, MVOLT or MTAP
	MVOLT is a ballast that operates 120V through 277V
	MTAP is a ballast that operates 120V or 277V

Finishes (see inside back cover)	
PTD	Painted - specify color code (ex. BRNZ for Bronze)


Options	
BCS	Brightness control shield for steep viewing angle
XPS	Express 10 day shipping

PHOTOMETRICS and BIM

Complete BIM (Building Information Modeling) and photometric files for these models may be downloaded from [www.visalighting.com](http://www.visalighting.com)

Reports			
IES File Number	LER	Report	page
OW1732-1PH100	49	05929	412
OW1734-1PH100	49	05929	412
OW1736-1PH100	49	05929	412
OW1738-1PH100	49	05929	412
OW1740-1PH100	49	05929	412
OW1742-1PH100	49	05929	412

See report on indicated page for complete detail





OW1734-BSIL-JB9005




OW1742-COPT

## FEATURES

- 5 year product warranty
- Fabricated metal front shield
- Cast aluminum, fully gasketed and sealed lamp chamber with clear tempered glass enclosure
- Oven cured no VOC acrylic powder coat
- Selection of front shield styles
- Front shield features snap lock for easy tool-less relamping
- HID or incandescent lamping
- Remote mounted HID ballast with long distance ignitor standard, 50' maximum ballast to lamp distance, PH70(347V) is 20' maximum, PH100(347V) is 15' maximum
- Recessed or surface mount housing
- Recessed mount housing for shallower extension from wall
- Surface mounts to standard electrical junction box (by others) with provided hardware
- UL wet location listed for mounting 4' above grade

## COMPANIONS

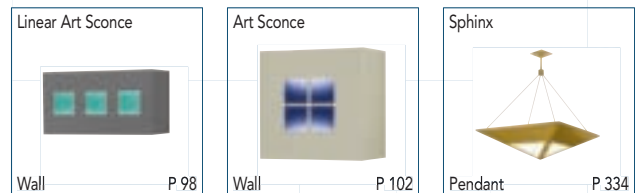

Wall P. 98

Wall P. 102

Pendant P. 334

## SUGGESTED VARIATIONS

- Increase front shield up to 24" maximum
- Colored front diffuser or glass lamp enclosure
- Custom cutout or logo in front shield
- Alternate lamping up to rated wattage listed

