

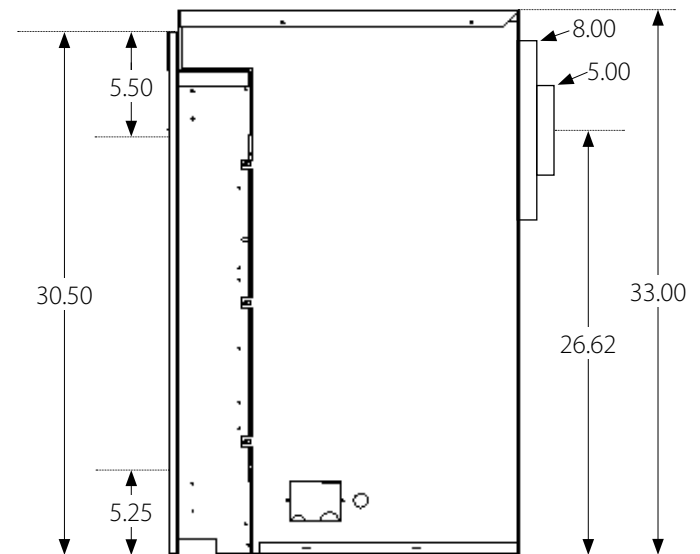
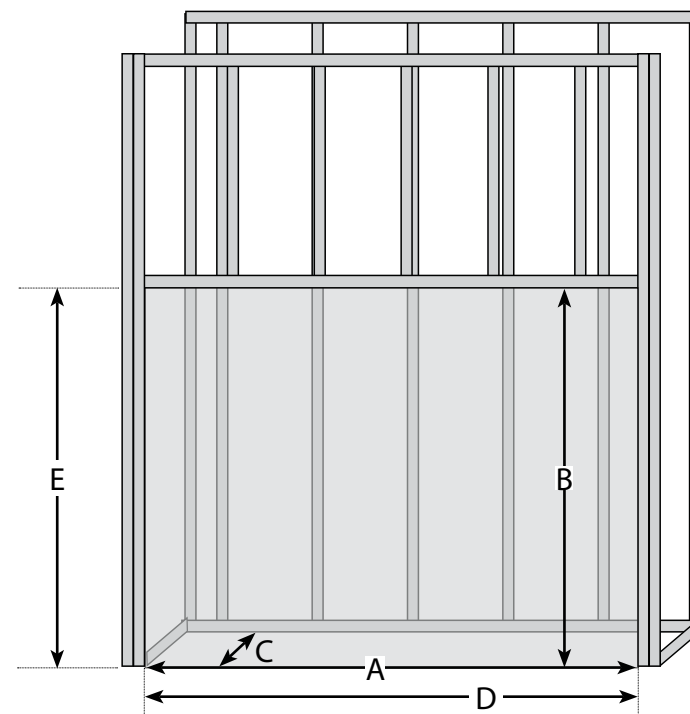


all dimensions in inches, not to scale



- May be vented through the top (default) or rear of the cabinet.
- The minimum vent run is a top-vented 40½" rise to a wall termination.
- Any "rear of the cabinet" venting **MUST** have a vertical component (see Installation Manual for all venting information.)
- Vent rise and run must intersect in a white graph square, below.
(Top vent graph shown, see Installation Manual for rear vent and multi-elbow graphs.)
- A power venting option is available for "off-the-chart" applications.

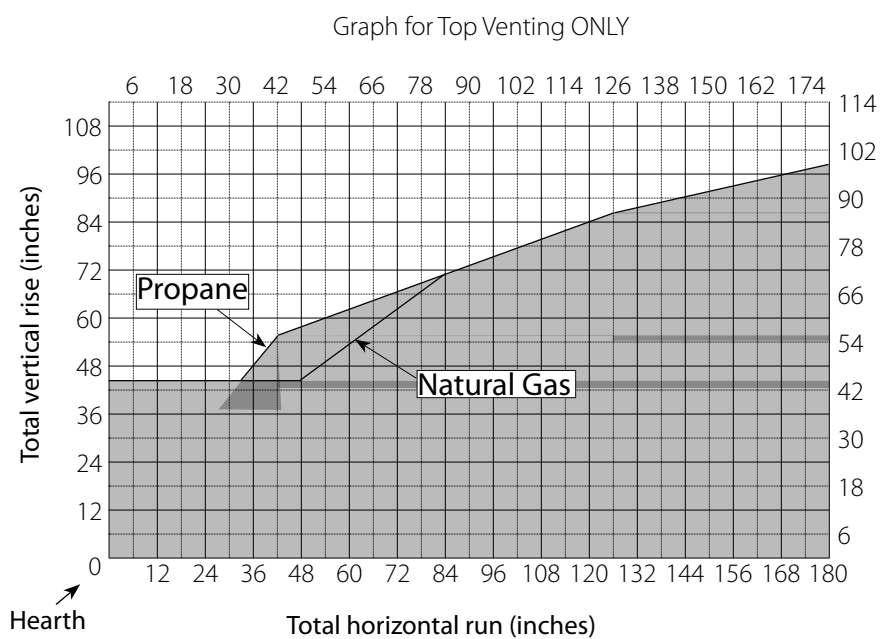

A	Rough Opening Width	42"
B	Rough Opening Height	36½"
C	Rough Opening Depth	225/8"
D	Non-combustible Zone Width	42"
E	Non-combustible Zone Height	36½"
F	Minimum Height to Chase Ceiling	43"

all dimensions in inches, -0.0