


LEUCOS®

INSTALLATION INSTRUCTIONS REGARDING:

MODULO S 22 - CELINE S AYERS S38



MODULO S 22 CELINE S AYERS S38

A1 Enclosed



One installer



Save instructions

Revised
13.11. 2006

WARNING: - DISCONNECT POWER BEFORE INSTALLATIONS.
- FIXTURE TO BE INSTALLED BY A CERTIFIED ELECTRICIAN.
- INSTALL IN ACCORDANCE WITH THE NATIONAL AND LOCAL ELECTRICAL CODES.
- FOLLOW DIRECTIONS CAREFULLY IN ORDER TO AVOID SCRATCHING OR DAMAGING THE GLASS DIFFUSER.


- Fig.1** - Before securing the mounting plate to the ceiling, remove the cover "B" from ceiling plate "A".
 - Secure plate "A" to ceiling.
 - Fig.2** - Guide the fixture's electrical wires through the large opening "E" and the steel Cable through the small opening "D" in the center of the plate "B".
 - Unscrew the adjustable pin "S" and guide the steel cable through it. Pin "S" has a self locking system. Push up pin "S" to unlock the steel cable. Having determined the correct height of the fixture, secure the steel cable screwing pin "S". To make sure that the fixture is well secured, place the fitting "J" at the end of the steel cable as shown.
 - Guide the electrical wire through the plastic clamp "X" then lock it with the side Plastic screw.
 - Connect the fixture's electrical wires to the supply wires.
 - Slide the canopy "B" up to rest against the ceiling and secure it in position with set screw "H".
 - Fig.3-4**. Remove the glassholder "N" from the socket assembly "M" by turning counterclockwise to unlock the two parts. Guide the socket assembly "M" through the glass diffuser "C". Slip glassholder "N" through the socket "M" by turning it clockwise to the stop. Then back-out lock screw "P" from the hole in socket "M". Lower glass diffuser onto glassholder.
- PLEASE NOTE: EACH GLASS IS AN INDIVIDUAL HANDBLOWN PLACE.**
- There fore each may have a different weight distribution. Should the glass not set level after installation, it can be levelled as illustrated by the arrows in **Fig.4** by: 1- rotating the glass while firmly holding the socket assembly and/or. 2. Sliding the cable retainer slightly with in its slot. After having balanced the glass diffuser properly secure the cable retainer by locking it with the set screw "P".
 - Install the light bulb. Restore power.

MODULO S 22 max 1x100W Incandescent A-19 medium base

CELINE S max 1x100W Incandescent A-19 medium base

AYERS S 38 max 1x100W Incandescent A-19 medium base

CIRCUIT DIAGRAM:

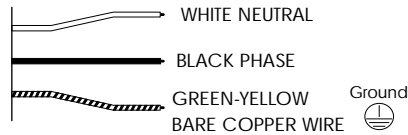

MOUNTS TO STANDARD IUNCTION BOX

For additional information please contact your local dealer or **LEUCOS USA** at: tel. (732) 225-0010 fax (732) 225-0250

FIG. 1

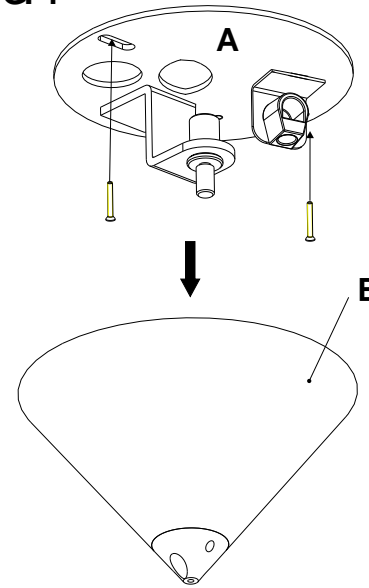


FIG. 2

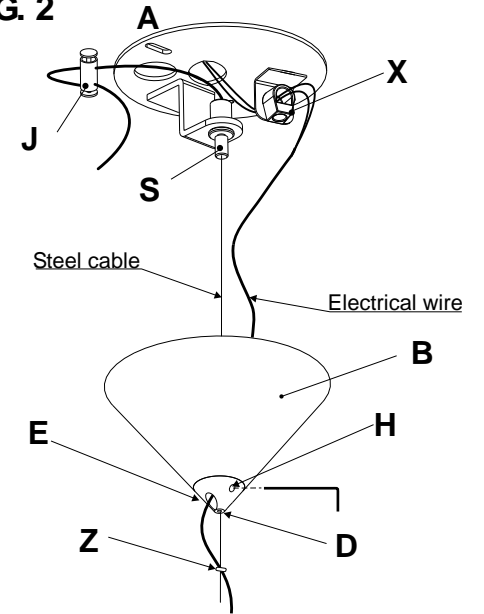


FIG. 3

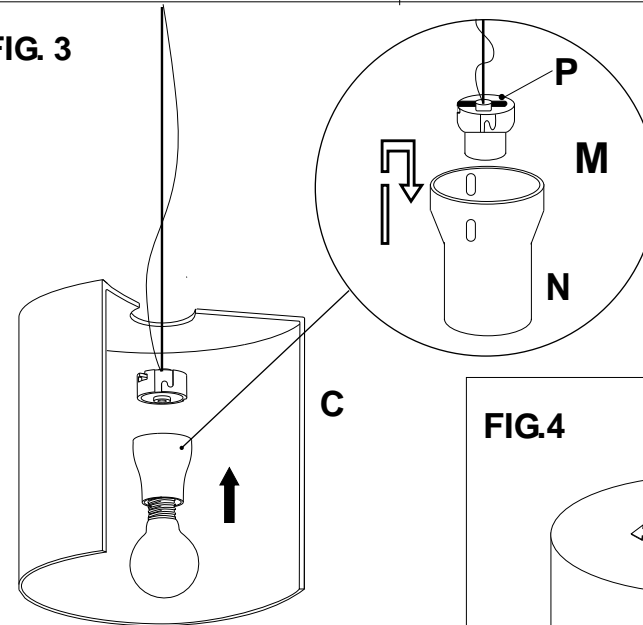


FIG. 4

