


## DROP RECESSED

R.Toso, N.Massari & Associates

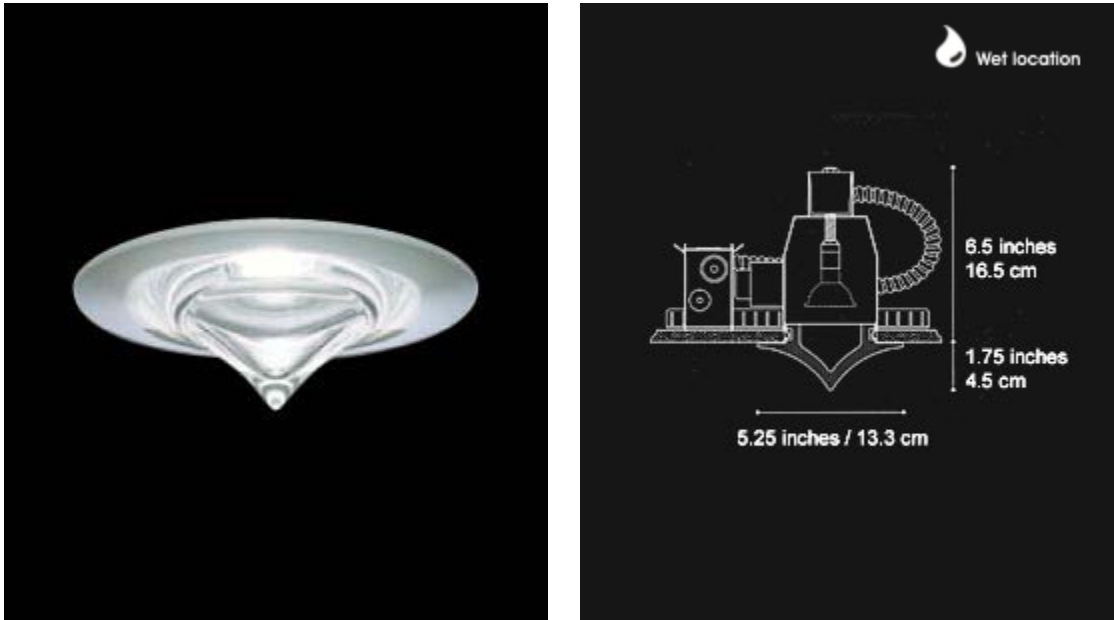

DIMENSIONS SHOWN FOR NEW CONSTRUCTION

### DESCRIPTION

A semi-recessed, low-voltage fixture providing downward light through a poured glass diffuser available in clear or satin glass trim. Provides diffused illumination as well as a soft pleasant ceiling glow.

### HOUSING & LAMP OPTIONS

#### Remodel & New Construction:

1x50 watt, low-voltage halogen, MR-16

#### Insulated Ceiling:

1x35 watt, low-voltage halogen, MR-16

Provided with 120/12V or 277/12V with magnetic transformer.

#### Housing options :

Remodel Housing, New Construction , Insulated Ceiling, Chicago Plenum, Air Tight, Vapor Tight.

#### Other lamp options:

Remodel Housing : 13W CFL.

New Construction and Insulated Ceiling : 13W & 18W CFL.

Compatible with quad lamp, 4 Pin, electronic ballast 120/277 Volt only.

Further options:

1x50 watt, halogen PAR 20 or 1x35 watt, PAR 20 metal halide

Also available with LED, consult factory.

#### GLASS COLOR


Crystal with Satin White Tip, Satin White with Crystal. Tip

**NOTE**



U.L. listed/CSA approved for damp location. For U.L. compliance, use enclosed MR-16 lamp.

**WET LOCATION**

**DROP**







**HOUSING & LAMP OPTIONS :**

**Remodel & New Construction :** 1x50 watt, low-voltage halogen, MR-16   
**Insulated Ceiling :** 1x35 watt, low-voltage halogen, MR-16   
 - Provided with 120/12V or 277/12V with magnetic transformer.

**Housing options :**


Remodel Housing, New Construction, Insulated Ceiling, Chicago Plenum, Air Tight, Vapor Tight.

**Other lamp options :**

Remodel Housing :  13W CFL.  
 New Construction and Insulated Ceiling :  13W & 18W CFL.  
 Compatible with quad lamp, 4 Pin, electronic ballast 120/277 Volt only.  
 Further options:  1x50 watt, halogen PAR 20  
 1x35 watt, PAR 20 metal halide

Also available with LED, consult factory.

 Opening 3.3/4"  Wet location 



**DROP - MR16 - 50W 38°**

Lux		
h	E max	E med
1.00	603	336
2.00	151	84
3.00	67	37
4.00	38	21
5.00	24	13

