




Quality:	GIARDINO	Collection:	Inspiration
Construction:	Tufted 1/10" saxonyvelours, printed	Pile material:	100% Polyamid
Backing:	texback® contract	Carrier material:	PES-Fleece

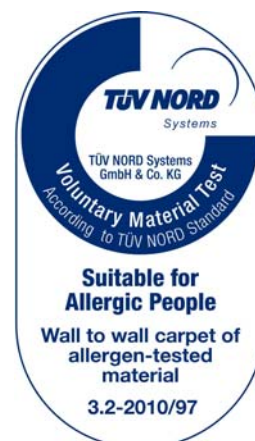

Gauge / 10 cm	approx.	39,5	Pile weight g/m ²	approx.	1070
Tufts / 10 cm	approx.	52	Primary backing weight g/m ²	approx.	120
Points dm ²	approx.	2054	Total weight g/m ²	approx.	1800
Pile thickness mm	approx.	5,4	Weight of backing g/m ²	approx.	740
Total thickness mm	approx.	7,5	Weight of pile material g/m ²	approx.	810
			Pile density	approx.	0,152

Castor chair test	DIN EN 985	$r \geq 2,4$							
Sound impact	DIN EN ISO 717-2	glued ΔLw	26 dB						
Sound absorbtion	DIN EN ISO 354	Hz	125	250	500	1.000	2.000	4.000	
	glued	α_s	0,01	0,02	0,10	0,21	0,44	0,64	
Heat flux	DIN ISO 8302: 1991	$1/\lambda =$	0,11	m ² K/W					
Fire rating	Suitable for glueing underfloor heating systems								
	DIN EN 13501-1	$C_{fl} - S1$	glued						

Static resistance	DIN EN 1815 Bl. 2	< 2,0	KV	b. 25% rel. F.
Surface resistance	DIN ISO/DIS 10965 Bl. 1 R _{OT}	< 10 ¹⁰	Ω	b. 25% rel. F.
Vertical resistance	DIN ISO/DIS 10965 Bl. 1 R _{DT}	< 10 ¹⁰	Ω	b. 25% rel. F.
Fastness to water	DIN EN ISO 105-E 01 colour-changes	N. 4		
Fastness to light	DIN EN ISO 105-B 02	N. 5		
Fastness to rubbing	DIN EN ISO 105-X 12	N. 4		

This quality is suitable for fitting on subfloors with underfloor heating when fully glued with suitable dispersion adhesive. To avoid changes in measurements we recommend total glueing (dispersion adhesives). Laying instructions: refer to our current cleaning and fitting instructions. Due to constant improvements and further developments of our products, we reserve the right to adapt our technical details acc