




Quality:	OMEGA	Collection:	Inspiration
Construction:	Tufted 1/10" velours, printed	Pile material:	100% Polyamid
Backing:	texback® contract	Carrier material:	PES-Fleece

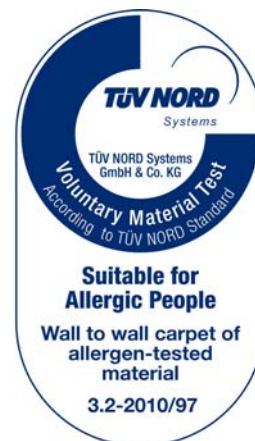

Gauge / 10 cm	approx.	39,5	Pile weight g/m ²	approx.	850
Tufts / 10 cm	approx.	54	Primary backing weight g/m ²	approx.	120
Points dm ²	approx.	2133	Total weight g/m ²	approx.	1500
Pile thickness mm	approx.	3,8	Weight of backing g/m ²	approx.	660
Total thickness mm	approx.	6,0	Weight of pile material g/m ²	approx.	580
			Pile density	approx.	0,152

Castor chair test	DIN EN 985	$r \geq 2,4$							
Sound impact	DIN EN ISO 717-2	glued ΔLw	25 dB						
Sound absorbtion	DIN EN ISO 354	Hz	125 250 500 1.000 2.000 4.000						
	glued	α_s	0,01 0,02 0,09 0,17 0,39 0,60						
Heat flux	DIN ISO 8302: 1991	$1/\lambda =$	0,07 m ² K/W						
Fire rating	DIN EN 13501-1	$C_{fl} -S1$ glued							

Static resistance	DIN EN 1815 Bl. 2	< 2,0 KV	b. 25% rel. F.
Surface resistance	DIN ISO/DIS 10965 Bl. 1 R _{OT}	< 10 ¹⁰ Ω	b. 25% rel. F.
Vertical resistance	DIN ISO/DIS 10965 Bl. 1 R _{DT}	< 10 ¹⁰ Ω	b. 25% rel. F.
Fastness to water	DIN EN ISO 105-E 01 Colours-changes	N. 4	
Fastness to light	DIN EN ISO 105-B 02	N. 5	
Fastness to rubbing	DIN EN ISO 105-X 12	N. 4	

This quality is suitable for fitting on subfloors with underfloor heating when fully glued with suitable dispersion adhesive. To avoid changes in measurements we recommend total glueing (dispersion adhesives). Laying instructions: refer to our current cleaning and fitting instructions. Due to constant improvements and further developments of our products, we reserve the right to adapt our technical details accordingly.