




<b>Quality:</b>	<b>PIED DE POULE</b>	<b>Collection:</b>	<b>Inspiration</b>
<b>Construction:</b>	Tufted 5/64" velours, printed	<b>Pile material:</b>	<b>100% Polyamid</b>
<b>Backing:</b>	texback®contract	<b>Carrier material:</b>	<b>PES-Fleece</b>



  
**1658-CPD-1016**  
**Vorwerk & Co. Teppichwerke**  
**GmbH & Co. KG**  
**Kuhlmannstrasse 11**  
**D – 31785 Hameln**  
  
**EN 14041: 2004**  
  

  
  
**EN 1307**

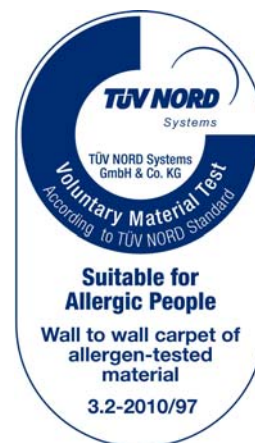

<b>Gauge / 10 cm</b>	approx.	<b>50</b>	<b>Pile weight g/m<sup>2</sup></b>	approx.	<b>700</b>
<b>Tufts / 10 cm</b>	approx.	<b>70</b>	<b>Primary backing weight g/m<sup>2</sup></b>	approx.	<b>120</b>
<b>Points dm<sup>2</sup></b>	approx.	<b>3500</b>	<b>Total weight g/m<sup>2</sup></b>	approx.	<b>1440</b>
<b>Pile thickness mm</b>	approx.	<b>4,2</b>	<b>Weight of backing g/m<sup>2</sup></b>	approx.	<b>650</b>
<b>Total thickness mm</b>	approx.	<b>6,0</b>	<b>Weight of pile material g/m<sup>2</sup></b>	approx.	<b>512</b>
			<b>Pile density</b>	approx.	<b>0,123</b>

<b>Castor chair test</b>	<b>DIN EN 985</b>	<b>r ≥ 2,4</b>							
<b>Sound impact</b>	<b>DIN EN ISO 717-2</b>	<b>glued Δ Lw</b>	<b>27 dB</b>						
<b>Sound absorbtion</b>	<b>DIN EN ISO 354</b>	<b>Hz</b>	125	250	500	1.000	2.000	4.000	
	<b>glued</b>	<b>αs</b>	0,01	0,02	0,09	0,21	0,38	0,54	
<b>Heat flux</b>	<b>DIN ISO 8302: 1991</b>	<b>1/λ =</b>	<b>0,11</b>	<b>m<sup>2</sup> K/W</b>					
<b>Fire rating</b>	<b>DIN EN 13501-1</b>	<b>Suitable for glueing underfloor heating systems</b>							
		<b>C<sub>fl</sub> –S1 glued</b>							

<b>Static resistance</b>	DIN EN 1815 Bl. 2	< 2,0	KV	b. 25% rel. F.
<b>Surface resistance</b>	DIN ISO/DIS 10965 Bl. 1 R <sub>OT</sub>	< 10 <sup>10</sup>	Ω	b. 25% rel. F.
<b>Vertical resistance</b>	DIN ISO/DIS 10965 Bl. 1 R <sub>DT</sub>	< 10 <sup>10</sup>	Ω	b. 25% rel. F.
<b>Fastness to water</b>	DIN EN ISO 105-E 01 colour-changes		N. 4	
<b>Fastness to light</b>	DIN EN ISO 105-B 02		N. 5	
<b>Fastness to rubbing</b>	DIN EN ISO 105-X 12		N. 4	

This quality is suitable for fitting on subfloors with underfloor heating when fully glued with suitable dispersion adhesive. To avoid changes in measurements we recommend total glueing (dispersion adhesives). Laying instructions: refer to our current cleaning and fitting instructions. Due to constant improvements and further developments of our products, we reserve the right to adapt our technical details accordingly.