


Pantarei 190-300-390

wall/ceiling

Ernesto Gismondi

Wall or ceiling surface mounted luminaires for diffused incandescent, fluorescent, halogen, or low voltage halogen lighting, suitable for outdoor wet locations, as well as indoor locations.

- body construction in solid die-cast aluminum with front concealed hinged diffuser, opening for quick and easy relamping access
- body finishes:
 - special corrosion resistant electrostatic powder coated finish in black or white
 - natural polished aluminum with clear polyurethane protective coating with no warranty for outdoor applications, as possible natural mutations of aluminum may occur over time, dependent on local atmospheric conditions and maintenance factors
- diffusers:
 - sturdy molded sanded glass with internal raised honey-combed pattern available for all models and suitable for all light sources
 - injection molded, impact resistant, opaline polycarbonate with internal honey-combed raised pattern, available for fluorescent light sources only
- wall or ceiling mounted centered on luminaire to standard 4" octagonal junction boxes
- U.L. listed for wet locations

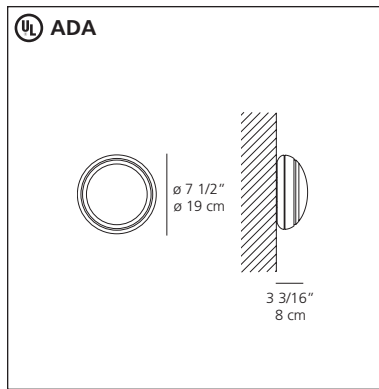

Pantarei 190 wall/ceiling

incandescent source

- 1 x 40W (E12/B10).....

or


fluorescent source

- 1 x 10W (G24q-1/T4).....

or

halogen source

- 1 x 50W/12V (GY6.35) supplied.....

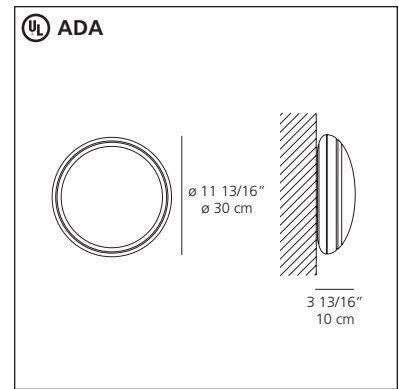

Pantarei 300 wall/ceiling

incandescent source

- 1 x 100W (E26/A19).....

or

fluorescent source

- 1 x 18W (G24q-2/T4).....

or


- 1 x 26W (G24q-3/T4).....

or

- 2 x 13W (G24q-1/T4).....

halogen source

- 1 x 100W (R7S/T3) supplied.....

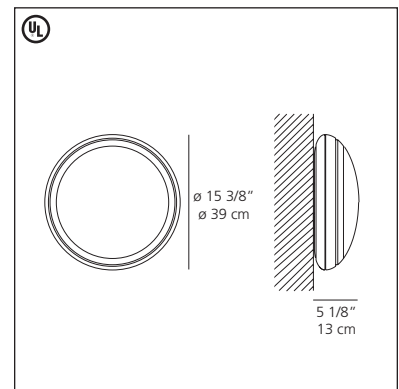

Pantarei 390 wall/ceiling

incandescent source

- 1 x 150W (E26/A21).....

or

fluorescent source

- 1 x 36W (2G10/T5).....

or

- 2 x 26W (GX24q-3/T4).....

or

halogen source

- 1 x 200W (R7S/T3) supplied.....

eco design

Artemide
ARCHITECTURAL OUTDOOR



Pantarei 390

