

Planar flat bollard


Eric Solè

Flat profile bollard mounted luminaires for direct and diffused incandescent or fluorescent lighting, suitable for outdoor wet locations.

- body/bollard in die-cast aluminum with special corrosion resistant electrostatic powder coated finish in black
- diffuser in molded ribbed clear polycarbonate
- fully gasketed with hardware in stainless steel
- direct anchorage to rigid surface (hardware by others)
- available in 24" or 32" height with single or double emission
- standardly equipped with thermally protected, class P, high power factor 120V electronic ballast (277V optional)
- U.L. listed for wet locations

eco♥design

Artemide
ARCHITECTURAL OUTDOOR

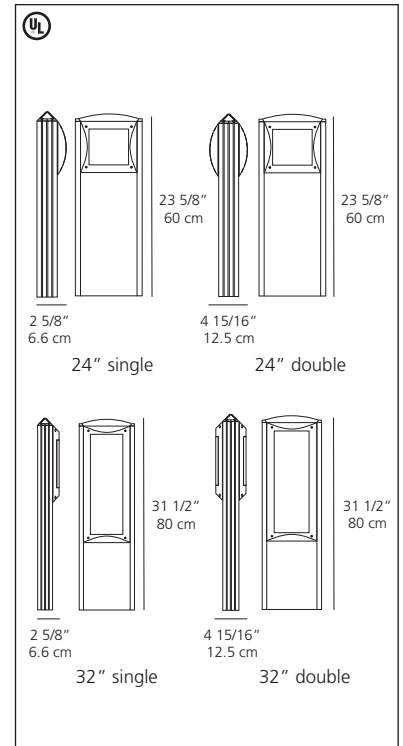

Planar flat bollard

24" single + 24" double incandescent source

- 1 x 40W (E26/A19).....

or

fluorescent source

- 1 x 10W (G24q-1/T4).....

or

- 1 x 18W (2G10/T5).....

32" single + 32" double incandescent source

- 1 x 40W (E26/A19).....

or

fluorescent source

- 1 x 18W (G24q-2/T4).....

or

- 1 x 26W (G24q-3/T4).....

or

- 1 x 36W (2G10/T5).....

