



#370 Facet Clip

BACK VIEW

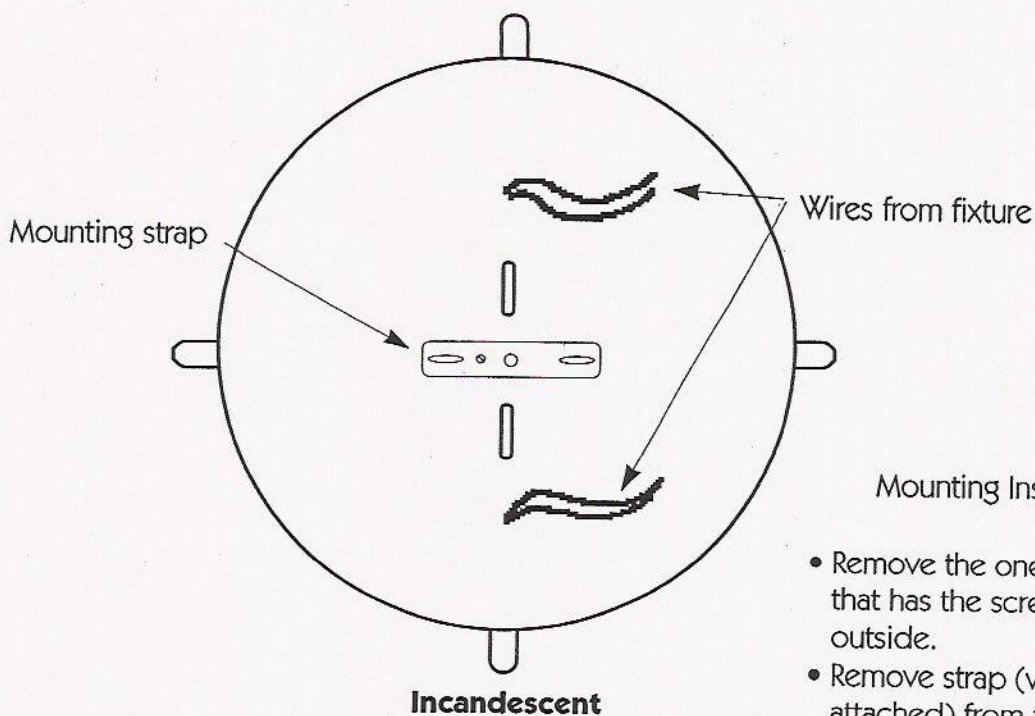

Mounting Instructions

- Remove the one nickel clip that has the screw on the outside.
- Remove strap (with nipple attached) from fixture and mount on J-box.
- Connect wires from fixture to wires from J-box.
- Slide nipple through center hole in back plate and secure with hex nut.
- Slide glass into the three nickel clips that are attached to backplate.
- Re-attach the nickel clip that you removed in Step 1.

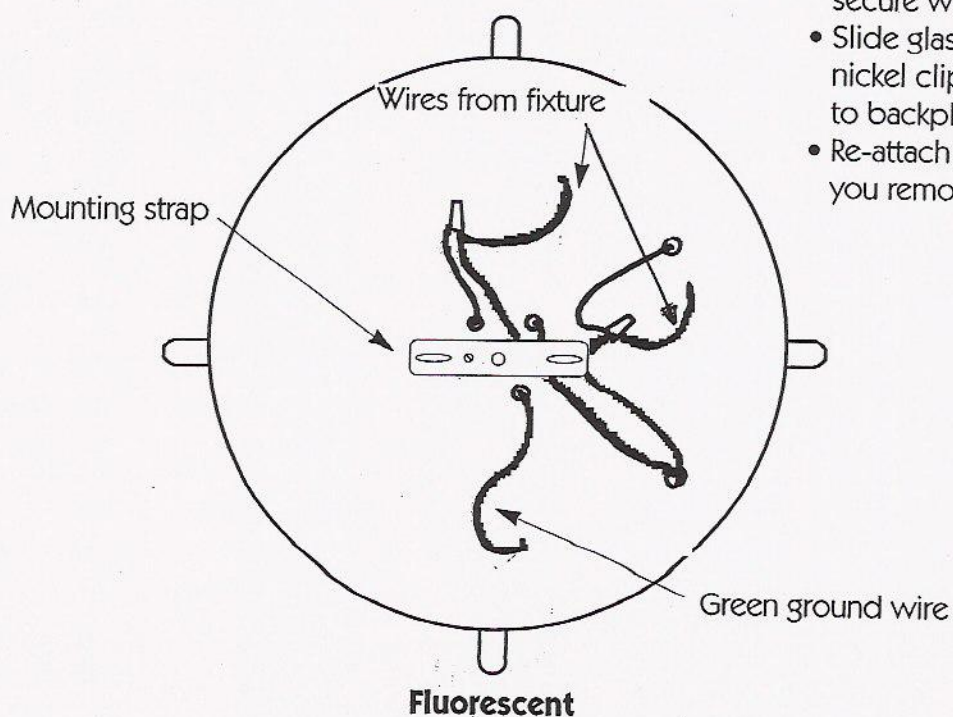

RON REZEK