


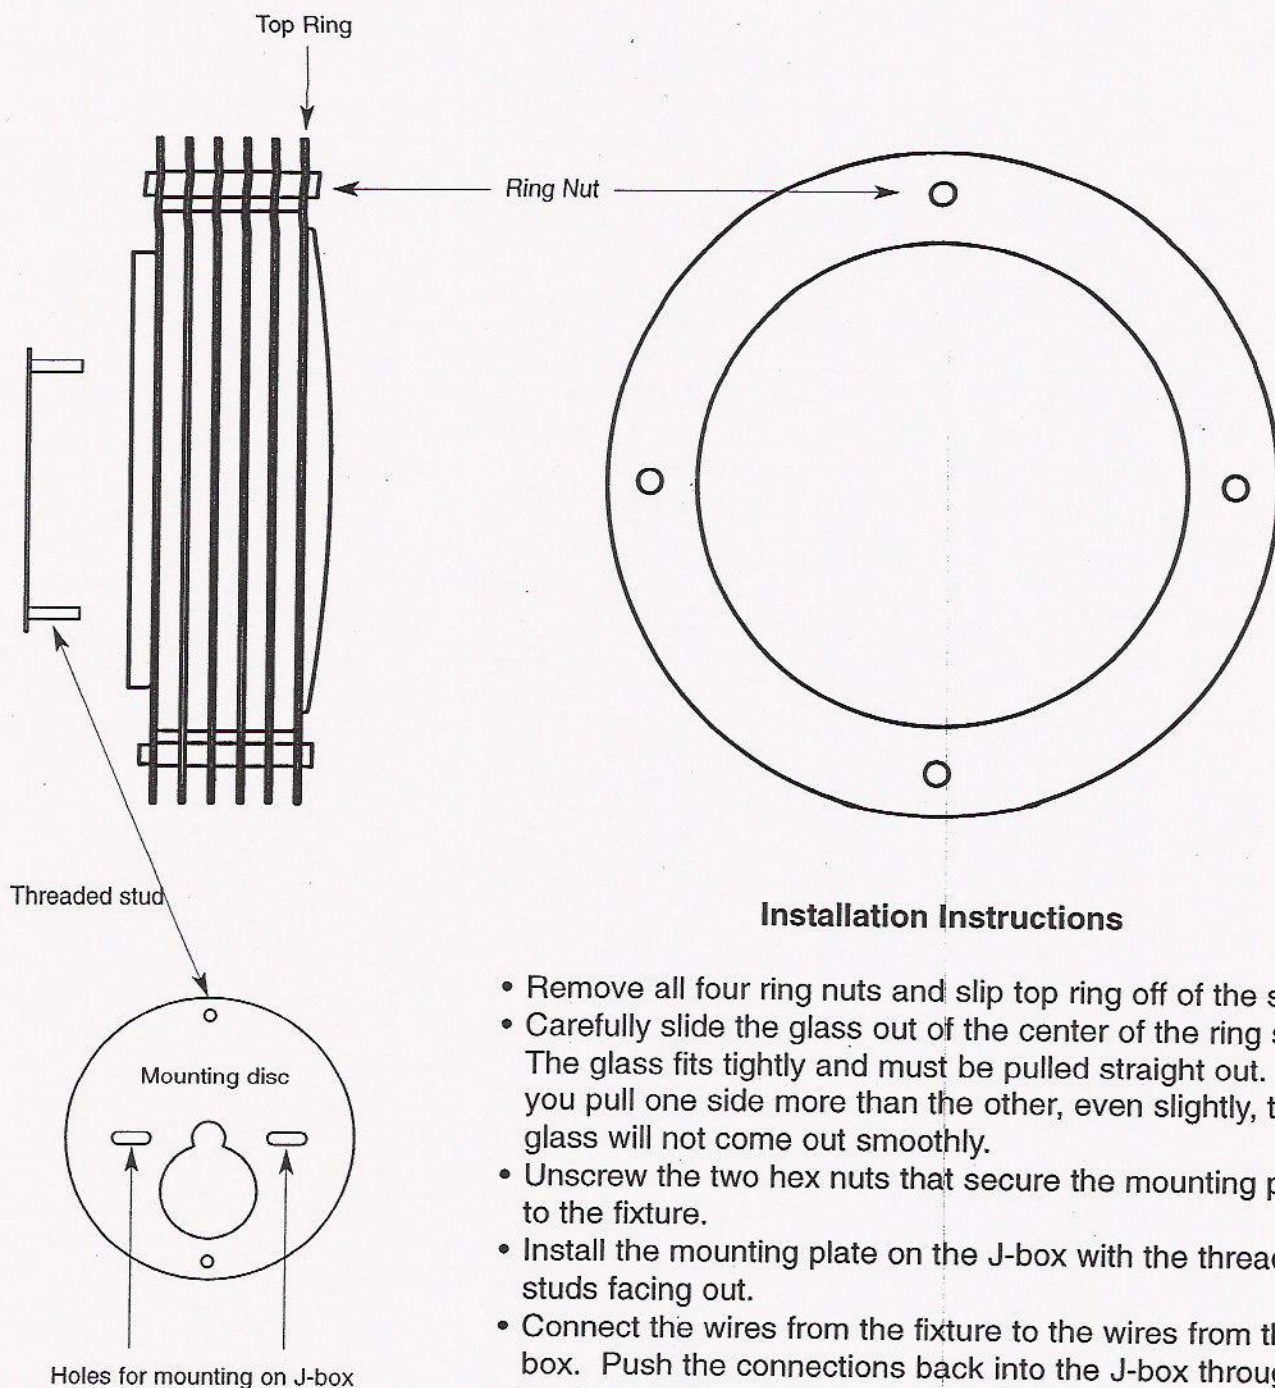

Installation Instructions

- Remove all four ring nuts and slip top ring off of the stack.
- Carefully slide the glass out of the center of the ring stack. The glass fits tightly and must be pulled straight out. If you pull one side more than the other, even slightly, the glass will not come out smoothly.
- Unscrew the two hex nuts that secure the mounting plate to the fixture.
- Install the mounting plate on the J-box with the threaded studs facing out.
- Connect the wires from the fixture to the wires from the J-box. Push the connections back into the J-box through the large hole.
- Slide the fixture over the threaded studs on the mounting plate and secure with hex nuts.
- Install lamping.
- Slide glass back into the center of the ring stack. The glass must be inserted straight in. If you push in one side further than the other, even slightly, the glass will not move in fully.
- Re-install the top ring and secure with the four ring nuts.

LYRA DISC
300/301

RON REZEK