

# Quarter Sphere

performance architectural lighting



PIW1040  
Painted-White




PIW1042  
Painted-White  
with Brushed Brass Over Steel Accent



PIW1044  
Painted-White  
with Brushed Brass Over Steel Accent



PIW1046  
Painted-White  
with Brushed Brass Over Steel Accent

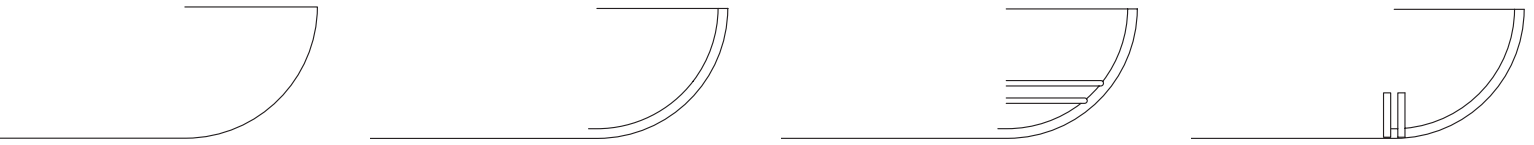

PIW1030  
Acrylic with Brushed Brass Over Steel Accent



PIW1032  
Acrylic with Brushed Brass Over Steel Accent



PIW1050  
Painted-White




PIW1034  
Acrylic with Brushed Brass Over Steel Accent


# Quarter Sphere Acrylic Sconce

PHACES


## Flush

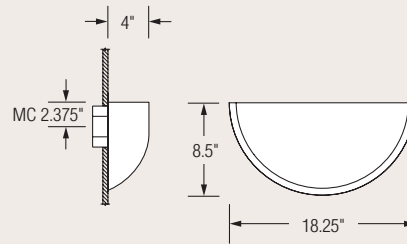

**PIW1030**  
**ADA**

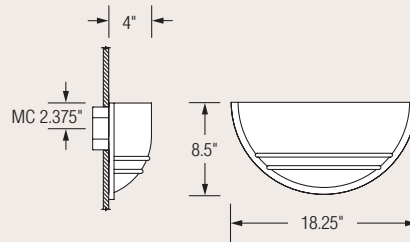

**PIW1032**  
**ADA**

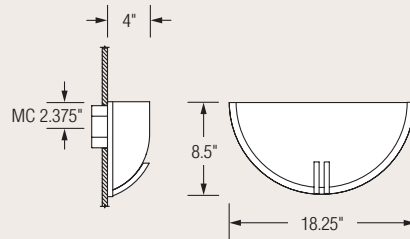

**PIW1034**  
**ADA**

### Specifications:

- 18 gauge formed cold-rolled steel housing and .125" white translucent acrylic
- ADA compliant
- Integral ballast
- Ballast thermally protected
- Universal mounting holes and direct access to a standard 4" octagonal junction box
- UL listed for damp locations. (Not recommended for exterior use.)

MC = Mounting Center



**A**  
Wide  
Indirect

Sample model number: **PIW1030 - 2F26 - 120 - PBST - TL**

Select Style	Select any Lamping (indirect/bowl illumination)	Lamping Detail (indirect - bowl illumination)	Optical Pkg.	Photometry	Select Voltage	Select Accent Finish	Select Options																																										
<p><b>PIW1030</b></p> <p><b>PIW1032</b></p> <p><b>PIW1034</b></p>	<table border="1"> <tr> <td><b>2N75</b></td> <td>(2) 75W A19 INC</td> <td>A</td> <td>NA</td> </tr> <tr> <td><b>2F13</b></td> <td>(2) CFQ13W/G24q</td> <td>A</td> <td>E14-4</td> </tr> <tr> <td><b>2F26</b></td> <td>(2) CFQ26W/G24q</td> <td>A</td> <td>E14-1</td> </tr> <tr> <td><b>2F26DM</b></td> <td>(2) CFQ26W/G24q</td> <td>A</td> <td>E14-4</td> </tr> </table>	<b>2N75</b>	(2) 75W A19 INC	A	NA	<b>2F13</b>	(2) CFQ13W/G24q	A	E14-4	<b>2F26</b>	(2) CFQ26W/G24q	A	E14-1	<b>2F26DM</b>	(2) CFQ26W/G24q	A	E14-4				<p><b>120</b></p> <p><b>277</b></p>	<table border="1"> <tr> <td><b>PT__</b></td> <td>Painted. (Include Paint Number.)</td> </tr> <tr> <td><b>ABST</b></td> <td>Antique brass over steel</td> </tr> <tr> <td><b>BBST</b></td> <td>Brushed brass over steel</td> </tr> <tr> <td><b>CPST</b></td> <td>Polished chrome over steel</td> </tr> <tr> <td><b>PBST</b></td> <td>Polished brass over steel</td> </tr> </table> <p><i>See Finish Selection Guide, pages 268-269.</i></p>	<b>PT__</b>	Painted. (Include Paint Number.)	<b>ABST</b>	Antique brass over steel	<b>BBST</b>	Brushed brass over steel	<b>CPST</b>	Polished chrome over steel	<b>PBST</b>	Polished brass over steel	<table border="1"> <tr> <td><b>TL</b></td> <td>Top Lens. Clear tempered glass. Standard on 1T150 lamping.</td> </tr> <tr> <td><b>F</b></td> <td>Fuse option. Factory installed.</td> </tr> <tr> <td><b>EMI</b></td> <td>Integral Emergency Lighting. Use with <b>RAB</b> - recessed accessory box. Fluorescent only. Battery lumen packages 650 and below.</td> </tr> <tr> <td><b>EMR</b></td> <td>Remote Emergency Lighting. Fluorescent only. Required for battery lumen packages greater than 650.</td> </tr> <tr> <td><b>RAB</b></td> <td>Recessed Accessory Box. Required with <b>DM</b> and <b>EMI</b> options.</td> </tr> <tr> <td><b>HP01</b></td> <td>Silver hand-painted acrylic</td> </tr> <tr> <td><b>HP02</b></td> <td>Beige hand-painted acrylic</td> </tr> <tr> <td><b>HP03</b></td> <td>Amber hand-painted acrylic (PIW1034 only.)</td> </tr> </table> <p><i>For further detail on options, see Technical Notes on page 266.</i></p>	<b>TL</b>	Top Lens. Clear tempered glass. Standard on 1T150 lamping.	<b>F</b>	Fuse option. Factory installed.	<b>EMI</b>	Integral Emergency Lighting. Use with <b>RAB</b> - recessed accessory box. Fluorescent only. Battery lumen packages 650 and below.	<b>EMR</b>	Remote Emergency Lighting. Fluorescent only. Required for battery lumen packages greater than 650.	<b>RAB</b>	Recessed Accessory Box. Required with <b>DM</b> and <b>EMI</b> options.	<b>HP01</b>	Silver hand-painted acrylic	<b>HP02</b>	Beige hand-painted acrylic	<b>HP03</b>	Amber hand-painted acrylic (PIW1034 only.)
<b>2N75</b>	(2) 75W A19 INC	A	NA																																														
<b>2F13</b>	(2) CFQ13W/G24q	A	E14-4																																														
<b>2F26</b>	(2) CFQ26W/G24q	A	E14-1																																														
<b>2F26DM</b>	(2) CFQ26W/G24q	A	E14-4																																														
<b>PT__</b>	Painted. (Include Paint Number.)																																																
<b>ABST</b>	Antique brass over steel																																																
<b>BBST</b>	Brushed brass over steel																																																
<b>CPST</b>	Polished chrome over steel																																																
<b>PBST</b>	Polished brass over steel																																																
<b>TL</b>	Top Lens. Clear tempered glass. Standard on 1T150 lamping.																																																
<b>F</b>	Fuse option. Factory installed.																																																
<b>EMI</b>	Integral Emergency Lighting. Use with <b>RAB</b> - recessed accessory box. Fluorescent only. Battery lumen packages 650 and below.																																																
<b>EMR</b>	Remote Emergency Lighting. Fluorescent only. Required for battery lumen packages greater than 650.																																																
<b>RAB</b>	Recessed Accessory Box. Required with <b>DM</b> and <b>EMI</b> options.																																																
<b>HP01</b>	Silver hand-painted acrylic																																																
<b>HP02</b>	Beige hand-painted acrylic																																																
<b>HP03</b>	Amber hand-painted acrylic (PIW1034 only.)																																																

**DM** = Dimming ballast(s) provided (Requires **RAB** option.)

*If Photometry is not available, consult factory for further details.*

**PIW1030**

**PIW1032**

**PIW1034**

Add **Accent Finish** to specify finish of accent element.

## OPTICAL PACKAGES

