



Interior Pendant Mount



Single Pendant





Specifications:

- **Extruded** - Extruded .188" aluminum housing.
- Cast aluminum end caps.
- Single units include 1/2" dia. steel mounting stem.
- Double and quad units include 11/16" dia. steel mounting stem.
- Single Pendants have a white plastic canopy and fit over a standard 4" junction box.
- Double and Quad Pendants have a 45° swivel with a steel canopy and fit over a standard 4" junction box.
- Stainless steel exterior fasteners.
- Adjustable arms on double and quad units allows for optical aiming from 22° below horizontal to 8° above horizontal.
- H.I.D. and Tungsten Halogen luminaires utilize a 95% premium reflective aluminum reflector. Impact and heat resistant tempered glass lens.
- Housings, endcaps, brackets and cover plates painted to match. Standard finish is thermoset polyester powder coat. All metal surfaces go through a 5-stage pretreatment process prior to powder coat application.
- Integral and remote ballasts are HPF electronic with low harmonic distortion (<15%). Ballasts are thermally protected and have Class "A" sound rating. Maximum remote mounting distance 50 feet.
- Metal Halide lamps are 4200°K.
- UL listed (US and Canada) for damp locations. (Not for exterior use).

Double Pendant

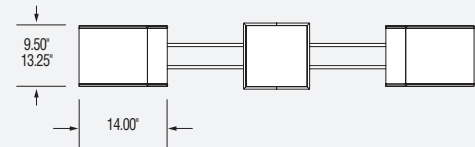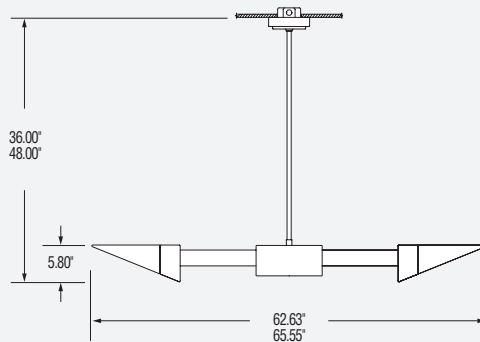

Quad Pendant

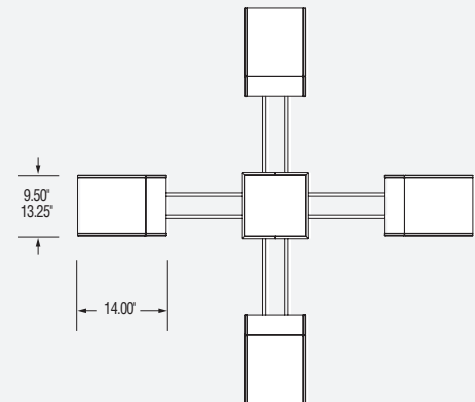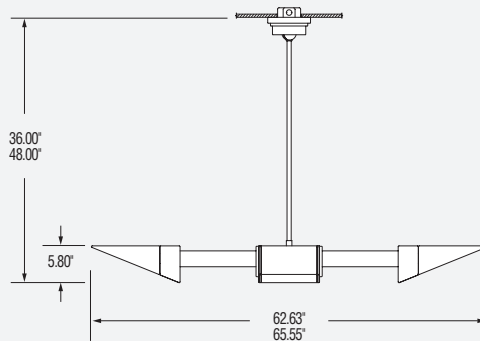

Note: All single lamp pendants have a standard OAH 36.00".
All dual lamp pendants have a standard OAH 48.00".

Assistance Available: Please see our website, or call 262-242-1420 for more specific product information, applications assistance or modification requests.

ECHO REFLECTIONS

Integral or Remote Ballast

FT	PW	VG	Lamp Wattage Range	Lamp
				FL
			39-1200W	MH
			150-2000W	TH

SELECT STYLE

SELECT LAMPING (Per Fixture Head)

SELECT OPTICAL PACKAGE

SELECT VOLTAGE

SELECT FINISH

SELECT OPTIONS

Integral Ballast

	Mounting	Housing	Lamping Detail (Per Fixture Head)
9.5'	EIP 5004	Single Extruded	1T150 (1) 150W T4 DC BAY QTZ 1T250 (1) 250W T4 DC BAY QTZ 1M39 (1) 39W T6 CMH/G12 1M70 (1) 70W T6 CMH/G12 1M150 (1) 150W T6 CMH/G12
13.25'	EIP 5012	Single Extruded	2T150 (2) 150W T4 DC BAY QTZ 2T250 (2) 250W T4 DC BAY QTZ 2M150 (2) 150W T6 CMH/G12
9.5'	EIP 5054	Double Extruded	1T150 (1) 150W T4 DC BAY QTZ 1T250 (1) 250W T4 DC BAY QTZ 1M39 (1) 39W T6 CMH/G12 1M70 (1) 70W T6 CMH/G12 1M150 (1) 150W T6 CMH/G12
13.25'	EIP 5064	Double Extruded	2T150 (2) 150W T4 DC BAY QTZ 2T250 (2) 250W T4 DC BAY QTZ 2M150 (2) 150W T6 CMH/G12
9.5'	EIP 5074	Quad Extruded	1T150 (1) 150W T4 DC BAY QTZ 1T250 (1) 250W T4 DC BAY QTZ 1M39 (1) 39W T6 CMH/G12 1M70 (1) 70W T6 CMH/G12 1M150 (1) 150W T6 CMH/G12

Remote Ballast

	Mounting	Housing	Lamping Detail (Per Fixture Head)
13.25'	EIP 5084	Quad Extruded	2T150 (2) 150W T4 DC BAY QTZ 2T250 (2) 250W T4 DC BAY QTZ 2M150 (2) 150W T6 CMH/G12

For additional lamping details and options, see Technical Notes on pages 160-161.

FT	Forward Throw
PW	Plane Wash

120
277

PT Painted. (Include Paint Number)

See SPI Finish Selection Guide on pages 168-169.

Other voltages/frequencies are available. For additional details and options, see Technical Notes on page 166 or consult factory for information.

MB Remote Magnetic Ballast.

F Fuse. (metal halide only)

DAH Overall Height.

For further details on Options, see Technical Notes on page 163.

Reflections
Wall
Ceiling
Pendant

3.5
Wall
Ceiling
Pendant

5.0
Wall
Ceiling
Pendant
Pier
Cove
MRI
Shapes

6.0
Wall
Ceiling
Pendant
Pier
Cove
MRI

9.0
Wall
Ceiling
Pendant
Pier
Cove
MRI
Shapes

16.5
Wall
Pier
Pendant

Exterior

Lightruss