


TF 3226 Table Set

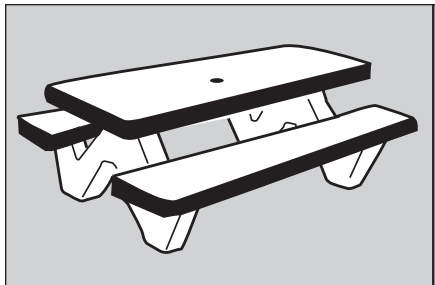

Options:

Note: Options may change without notice.
Call to confirm current options.

Smooth/Stained Concrete (legs):

Tan - Gray

Ground & Polished (top & seats)

Misty - Sand - Gray - Brown - Brick Red

Glass

Clear - Emerald - Blue - Amber
Champaign - Charcoal

Custom Options Available



CAUTION

DO NOT OVER
TIGHTEN ANY BOLTS




Size:	60" L x 63" W x 30" H.
Shipping Weight:	1380 lbs.
Reinforcing:	3/8" & 1/4" Dia. steel rebar.
Hardware:	(4)- table-to-leg bracket. (8)- seat-to-leg brackets. (12) - 7/16" Dia. x 5 1/2" hex screws. (12) - 7/16" locking hex nuts. (24) - 7/16" S/S flat washers (24) - 3/8" S/S flat washers (8) - Neoprene Pads. (24) - 3/8" Dia. x 1" hex bolts.
Anchoring:	Optional.
Maintenance:	Periodically rinse with water and mild detergent. Re-seal annually or as needed.
Packaging:	Crated.

* Accepts Umbrella

TF 3226 Table Set

TF3226 REC. TABLE SET
HARDWARE KIT NO. TF9010 STEEL
OPTION HARDWARE KIT NO. TF9057-SS 316 STAINLESS STEEL

ITEM NO	DESCRIPTION	WT	PART NO	QTY
1	CAST CONCRETE TABLE TOP 60"	470 LBS	TF3227	1
2	CAST CONCRETE SEAT TOP 60"	175 LBS	TF3232	2
3	CAST CONCRETE LEGS 4" WIDE	225 LBS	TF3564	2
4	3/8" FLAT WASHERS PLATED STEEL		PM1069	24
5	3" X 3" TABLE TO-LEG BRACKETS 3/16" THICK STEEL	5 LBS.	85-4	4
6	3" X 5" SEAT TO-LEG BRACKETS 1/4" THICK STEEL	2 LBS.	85-2	8
7	3/8"-16 X 1" UNC HEX HEAD BOLTS S/S		RM10261	24
8	7/16"-14 X 5 1/2" UNC HEX HEAD BOLTS PLATED		PM19194	12
9	7/16"-14 UNC LOCKING HEX NUT PLATED		PM10300	12
10	7/16"-14 FLAT WASHERS PLATED		PM10335	12
11	NEOPRENE WASHER		PM10366	8
12				
OPTIONAL	3" X 1 1/2" S/S INSERTS		RM10461	8
	OPTIONAL ANCHOR KIT	66 LBS.	TF9400	4

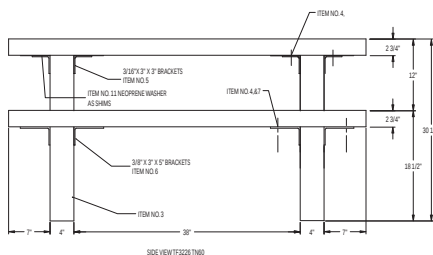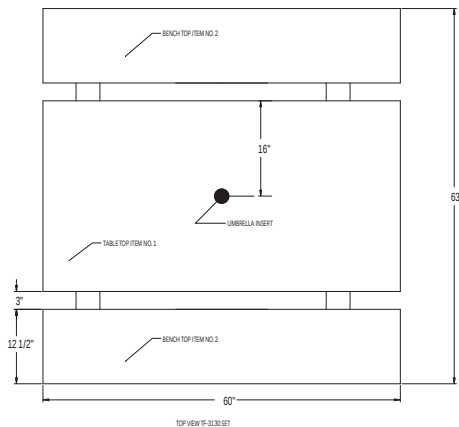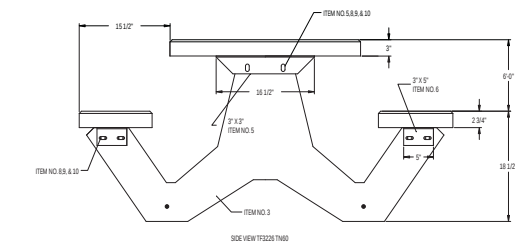

1.1 SUMMARY

- A. Section includes: Furnish Precast Concrete Table indicated on drawings or specified herein.

1.2 REFERENCES

- A. American Society for Testing & Materials
1. ASTM C33 2. ASTM C150 3. ASTM C31

1.5 SUBMITTALS

- A. Submit product data, shop drawings and Samples.
 1. Product Data: Manufacturer's specifications and technical data edited specifically for proposed system, including the following specific information:
 - a. Detailed specification of construction fabrication.
 - b. Manufacturer's installation instructions
 - c. Maintenance literature
 - d. Product warranty
 2. Shop Drawings: Indicate pertinent dimensions, general construction, component connections anchoring methods, hardware and installation procedures.
 3. Samples as requested by Architect.

1.6 QUALITY ASSURANCE

- A. Qualifications of Manufacturer: Manufacturer to be prequalified by specifier prior to bidding. Failure to comply will result in disqualification of bid. Manufacturer to have at least five years experience in the manufacturer of precast concrete tables field proven for at least five years.

1.10 WARRANTY

Manufacturer shall submit a written warranty for precast products for the period of two years upon acceptance of products.

2.1 MANUFACTURERS

- A. Acceptable manufacturer for Precast Concrete Tables to be known as Wausau Tile, Inc.
PO Box 1520, Wausau, WI 54402-1520.
(800) 388-8728 FAX (715) 355-4627
- B. Clarification Note: Drawings and installation specification are based on manufacturers proprietary literature from Wausau Tile, Inc.
Other manufacturers shall comply with minimum levels of material and detailing indicated on drawings or specified herein.
- C. All Precast products for this project shall be of one manufacturer.

2.2 MATERIALS

- A. Portland Cement: ASTM C150 specifications for Portland Cement.
- B. Aggregates: All aggregates to meet ASTM C33 specifications, to be cleaned of foreign matter and properly graded to size.
- C. Coloring: Pigments used shall be inorganic, resistant to alkalinity and used as per manufacturers recommendations.