



MF 3202

5/05

Specification Sheet

MF3202

Size: 26" Dia.x 33"
 Weight: 185 lbs.
 Gallon Capacity: 31 gallons
 Features: Cast aluminum funnel top w/ security cable.
 Side opening door.
 Construction: 1/4" x 1 1/2" hot rolled steel
 Parts List: 1ea - TF1510 - 22" cast aluminum lid
 1ea - TF1625 - 31 gallon
 polyethylene reusable liner
 1ea - TF1998 - security cable assembly

Color Selection:

Black - Green - Yellow
 Beige - Brown - Red
 Burgundy - Blue

Custom colors are
 available upon request

Metal Form Flat Steel Specifications

Finish Specification

Metal Armor Coating Performance Properties
 Thermoplastic functional polyethylene copolymer-based coating
 Coverage: 20mils minimum

Flexibility: 1/8", no cracks	ASTM D 533
Adhesion: >1000 psi/(5A)	ASTM D 4541/ASTM D 3359
	Scored and unscored/no peeling or removal
Impact Resistance: >384 in/lbs	ASTM D 2794
Gloss: At 60 degrees – 35-60	ASTM D 523
Delta Shift: 1.77	1400 MJUV = 5 yrs (color tested: Red)
Hardness: Shore D-48	ASTM 2240
Taber Abrasion: 90 mg loss - CS10 wheel	ASTM D 4060
100 mg loss – CS17 wheel	
Salt Spray Resistance: >4000 hrs	ASTM B 117
Humidity Resistance: No blistering or loss of	ASTM D 2247
Gloss after 1000 hrs	
Smoke Development: 10 Flame spread index	ASTM E 84
10 Smoke developed index	
Chip Resistance: 8A	ASTM D 3170

WAUSAU TILE

P.O. Box 1520
 Wausau, WI 54402-1520
 Ph: 800-446-8020
 Fax: 715-355-4627
www.wausautile.com


Environmental
 VOC Content: 0, 100% solids

Special Approvals
 FDA approved for direct food contact and has USDA
 compliance for use within the product zone applications.

Health
 NFPA Classification:
 Flammability: 1
 Health: 0
 Reactivity: 0

SPECIFICATIONS

MF 3202 Waste Container



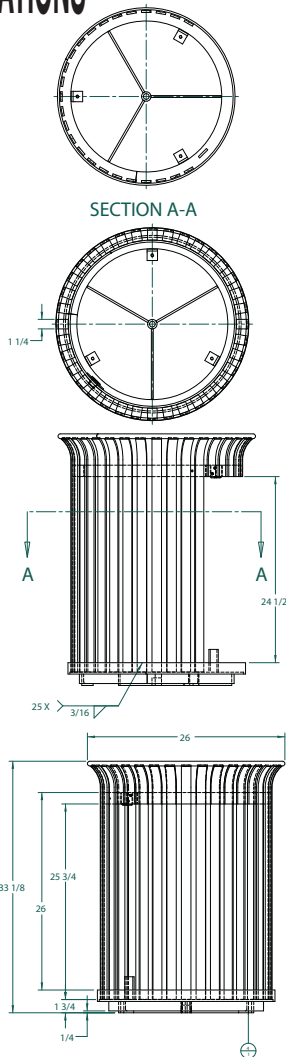


SECTION A-A

ANCHOR DETAIL

To install Rawl-Bolt™ one piece heavy duty anchors, follow simple instructions below:

1. With fixtures in place, drill hole of same nominal diameter as the Rawl-Bolt.™
2. Remove tag from assembled anchor. Insert anchor through hole in fixture.
3. Tap Rawl-Bolt™ into hole until washer and bolt head are seated against fixture.
4. Tighten with wrench.



1.1 SUMMARY

- A. Section includes: Furnish Metal-Form benches on drawings or specified herein.

1.2 REFERENCES

- A. American Society for Testing & Materials
 1. ASTM-D533 ASTM-D4541 ASTM-D3359 ASTM-2794
 - ASTM-D523 ASTM-4060 ASTM-B117 ASTM-D2247
 - ASTM-E84 ASTM-D3170 ASTM-A569 ASTM-B6
 - ASTM G26 ASTM-A569/A569M

1.3 SUBMITTALS

- A. Submit product data, shop drawings and samples.
 1. Product Data: Manufacturer's specifications and technical data edited specifically for proposed product, including the following specific information:
 - a. Detailed specification of construction fabrication.
 - b. Manufacturer's installation instructions
 - c. Product warranty
- B. Shop Drawings: Indicate pertinent dimensions, general construction, component connections, anchoring methods, hardware and installation procedures.
- C. Samples as requested by Architect.

1.4 QUALITY ASSURANCE

- A. Qualifications of Manufacturer: Manufacturer to be prequalified by specifier prior to bidding. Failure to comply will result in disqualification of bid. Manufacturer to have at least three years experience in the manufacture of thermo plastic coated steel site furnishings field proven for at least three years.
- B. Warranty: 5 Years - Metal Armor Coated Products

1.5 MANUFACTURERS

- A. Acceptable manufacturer for thermo plastic coated steel site furnishings to be known as:
Wausau Tile, Inc. Metal-Form Division
PO Box 1520
Wausau, WI 54402-1520
(800) 446-8020 FAX (715) 355-4627
- B. Clarification Note: Drawings and installation specifications are based on manufacturers proprietary literature from Wausau Tile, Inc., Metal-Form Division. Other manufacturers shall comply with minimum levels of material and detailing indicated on drawings or specified herein.