


TF 1005 W14 Waste Container w/ ATSN 4-Way Top & Liner

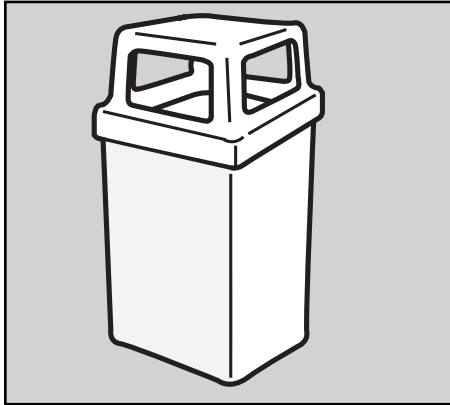

Options:

Note: Options may change without notice.
Call to confirm current options.

Exposed Aggregate:

Tan w/Gray Matrix - Misty Gray w/Gray

Weatherstone:

Sand - Gray - Brown - Buff - Cream
Light Charcoal - French Gray - Brick Red

Custom Options Available

Size: 14" Sq. x 30" H
Weight: 205 lbs
Capacity: 9 gallons
Material: Reinforced Concrete
Reinforcing: 1/4" Dia. steel rebar
Wall Thickness: 2" at top with 2% pitch
Hardware: (4) - 1/2" Dia. elevator bolts, inserted on site
(1) - 1/4" Dia. zinc alloy insert
(4) - 1/2" Dia. Threaded Inserts
Packaging: Palletized
Maintenance: Rinse occasionally with water & mild detergent
Re-seal annually
Anchoring: Optional
Logo Options: 7-3/4" x 1/8" Clear Lucite silk-screened with permanent ink. Installed with two tamper-proof rivets.

TF 1400 ATSN 4-Way Top

Size: 14" Sq. x 9-1/2" H
Weight: 4 lbs
Material: Polyethylene Plastic
Colors: Brown, Gray, Bronze
(Colors may change without notice.)

Hardware: (1) - Security Cable
(1) - 1024 Hex head bolt
(1) - Shouldered screw
(1) - 1024 Washer
(1) - Shouldered allen bolt

Openings: 9-3/4" x 4-3/4"

Packaging: Shipped in carton


Maintenance: Clean with mild soap and water

Features: Made of recyclable plastic


Installation: Attach to container with security cable.

TF 1600 Liner WC24S


Size: 10-3/4" Sq. x 23-2/4" H
Weight: 5 lbs
Capacity: 9 gallons
Material: Recycled Polyethylene Plastic
Color: May Vary
Packaging: Shipped inside the unit



TOP VIEW

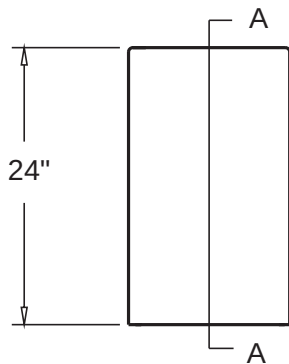

FRONT VIEW

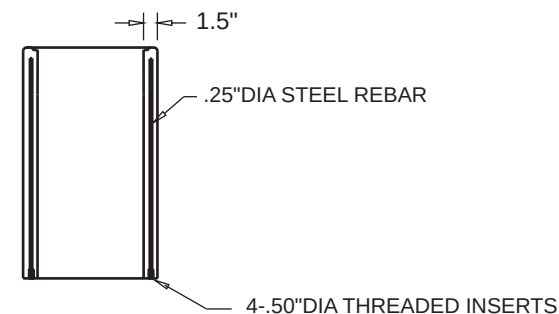

SECTION A-A

1.1 SUMMARY

- A. Section includes: Furnish Precast Concrete Waste Containers indicated on drawings or specified herein.

1.2 REFERENCES

- A. American Society for Testing & Materials
 1. ASTM C33
 2. ASTM C150
 3. ASTM C31

1.5 SUBMITTALS

- A. Submit product data, shop drawings and samples.
 1. Product Data: Manufacturer's specifications and technical data edited specifically for proposed system, including the following specific information:
 - a. Detailed specification of construction fabrication.
 - b. Manufacturer's installation instructions
 - c. Maintenance literature
 - d. Product warranty
 2. Shop Drawings: Indicate pertinent dimensions, general construction, component connections anchoring methods, hardware and installation procedures.
 3. Samples as requested by Architect.

1.6 QUALITY ASSURANCE

- A. Qualifications of Manufacturer: Manufacturer to be prequalified by specifier prior to bidding. Failure to comply will result in disqualification of bid. Manufacturer to have at least five years experience in the manufacturer of precast concrete waste containers field proven for at least five years.

1.10 WARRANTY

Manufacturer shall submit a written warranty for precast products for the period of two (2) years upon acceptance of products.

2.1 MANUFACTURERS

- A. Acceptable manufacturer for Precast Concrete Waste Containers to be known as:
Wausau Tile, Inc. Terra-Form Division.
PO Box 1520, Wausau, WI 54402-1520.
(800) 388-8728 FAX (715) 355-4627
- B. Clarification Note: Drawings and installation specification are based on manufacturers proprietary literature from Wausau Tile, Inc. Other manufacturers shall comply with minimum levels of material and detailing indicated on drawings or specified herein.
- C. All Precast products for this project shall be of one manufacturer.

2.2 MATERIALS

- A. Portland Cement: ASTM C150 specifications for Portland Cement.
- B. Aggregates: All aggregates to meet ASTM C33 specifications, to be cleaned of foreign matter and properly graded to size.
- C. Coloring: Pigments used shall be inorganic, resistant to alkalinity and used as per manufacturers recommendations.

#