


TF 1026 WC AUTO ATTENDANT- DOUBLE

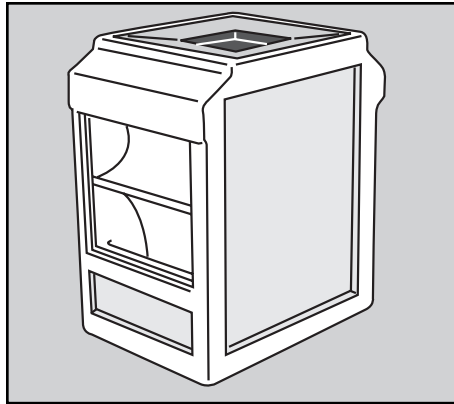

Options

Note: Options may change without notice.
Call to confirm current options.

Exposed Aggregate:

Tan w/Gray Matrix - Tan w/Brown Matrix
Tan w/Sand Matrix - Misty Gray w/Gray

Weatherstone:

Sand - Gray - Brown - Buff - Cream
Light Charcoal - French Gray - Brick Red

Custom Options Available

Size:	21" x 25" x 35" H.
Weight:	515 lbs.
Capacity:	20 gallons
Material:	Reinforced Concrete
Reinforcing:	1/4" Dia. steel rebar
Hardware:	(4) - 1/2" Dia. Ferruled Inserts (1) - 1/4" Dia. Zinc Alloy Inserts (4) - 1/2" Dia ELevator Bolts; inserted on site. (2) - 5/8" Dia. lifting inserts (6) - 3/16" Dia Zinc Alloy Inserts (2) - Polyethylene Plastic Towel Dispenser (2) - Polyethylene Removeable Wash Liquid Dispenser.
Packaging:	Palletized
Maintenance:	Rinse as needed with water & mild detergent, reseal annually.
Anchoring:	Optional
Logo Options:	12" Dia. 1/4" clear lucite silk screened with permanent inks. Installed with four tamper proof rivets, or custom cast in place logo.

TF 1607 Liner (Standard)

Size:	17" x 12" x 26" H
Weight:	8 lbs.
Capacity:	20 gallons
Material:	Recycled Polyethylene Plastic
Colors:	May vary

TF 1467 Colonial Aluminum Top (Standard)

Size:	18" Sq. x 2"
Weight:	8 lbs.
Material:	Aluminum
Color:	Bronze (Colors may change without notice.)
Hardware:	(1) - Security Cable (2) - Shouldered Allen Bolt
Opening:	8" Sq.
Packaging:	Shipped in carton
Maintenance:	Clean with mild soap and water
Installation:	Attach to container with security cable.

1.1 SUMMARY

- A. Section includes: Furnish Precast Concrete Waste Containers indicated on drawings or specified herein.

1.2 REFERENCES

- A. American Society for Testing & Materials
 - 1. ASTM C33
 - 2. ASTM C150
 - 3. ASTM C31

1.5 SUBMITTALS

- A. Submit product data, shop drawings and samples.
 - 1. Product Data: Manufacturer's specifications and technical data edited specifically for proposed system, including the following specific information:
 - a. Detailed specification of construction fabrication.
 - b. Manufacturer's installation instructions
 - c. Maintenance literature
 - d. Product warranty
 - 2. Shop Drawings: Indicate pertinent dimensions, general construction, component connections anchoring methods, hardware and installation procedures.
 - 3. Samples as requested by Architect.

1.6 QUALITY ASSURANCE

- A. Qualifications of Manufacturer: Manufacturer to be prequalified by specifier prior to bidding. Failure to comply will result in disqualification of bid. Manufacturer to have at least five years experience in the manufacturer of precast concrete waste containers field proven for at least five years.

1.10 WARRANTY

Manufacturer shall submit a written warranty for precast products for the period of two (2) years upon acceptance of products.

2.1 MANUFACTURERS

- A. Acceptable manufacturer for Precast Concrete Waste Containers to be known as:
Wausau Tile, Inc. Terra-Form Division.
PO Box 1520, Wausau, WI 54402-1520.
(800) 388-8728 FAX (715) 355-4627
- B. Clarification Note: Drawings and installation specification are based on manufacturers proprietary literature from Wausau Tile, Inc. Other manufacturers shall comply with minimum levels of material and detailing indicated on drawings or specified herein.
- C. All Precast products for this project shall be of one manufacturer.

2.2 MATERIALS

- A. Portland Cement: ASTM C150 specifications for Portland Cement.
- B. Aggregates: All aggregates to meet ASTM C33 specifications, to be cleaned of foreign matter and properly graded to size.
- C. Coloring: Pigments used shall be inorganic, resistant to alkalinity and used as per manufacturers recommendations.

#