


TF1029 W24 Recycle Waste Container w/ Push Door Top

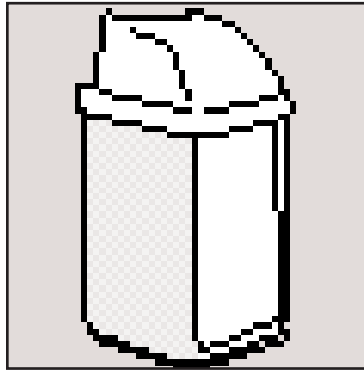

Options

(Note: Options may change without notice. Call to confirm current options.)

Weatherstone:

Sand - Gray - Brown - Buff - Cream - Soulard Green
Light Charcoal - French Gray - Brick Red

Exposed Aggregate:

Tan w/Gray Matrix - Tan w/Brown Matrix
Tan w/Sand Matrix - Misty Gray w/Gray
Wyoming White

Granitex (GTX)

2078F, 4028F, 6208F, 1168F, 2098F

Glass

Clear - Emerald - Blue - Amber
Champaign - Charcoal

Custom Options Available

Size: 24" W x 26" L x 52" H.
Weight: 710 lbs.
Capacity: 45 gallons with W24 liner
Material: Reinforced Concrete
Door: (1) - 7 ga. Steel Door Powder coated: Brown - Gray - Sand
Wall Thickness: 2" at top/w a 2% taper
Hardware: (4) - 1/2" Dia. elevator bolts, inserted on site
(4) - 1/2" Dia. inserts
(1) - Allen wrench key
(2) - 4" x 1-13/16" steel hinges
(1) - 2-1/2" x 1-1/2" steel striker plate
(1) - 4-1/2" x 2" steel latch bracket
(4) - 3/8" inserts
(4) - 3/8" x 16 bolts
(2) - 1/4" x 20 inserts
(1) - Locking mechanism

Optional Hardware: A permanent Latch Handle is available upon request

Packaging: Palletized

Maintenance: Occasionally rinse with water & mild detergent.
Re-seal annually

Anchoring: Optional

Logo Options: 16" Dia. x 1/4" Clear Lucite silk-screened with permanent inks. Installed with four tamper-proof rivets, or Custom cast-in-place logo.

Features: Unit has a concealed lock which uses a standard allen wrench key.

TF 1430 Push Door Top

Size: 25" sq. x 13" H.
Weight: 12 lbs.
Material: Polyethylene Plastic
Colors: Brown, Gray, Bronze & Blue
(Colors may change without notice)
Hardware: (2) - Security Cables
(4) - 1024 Hex head bolts
(4) - Shouldered screws
(4) - 1024 Washers
(4) - Shouldered allen bolts
Opening: 15 1/2" W x 6 1/2" H
Packaging: Shipped in carton
Maintenance: Clean with mild soap and water.
Features: Made of recyclable plastic
Self-closing door
Installation: Attach to container with security cables.

TF 1640 Liner (Included)

Size: 19-5/8" Sq. x 30-1/2" H
Wt: 13 lbs.
Cap: 45 gallons
Mat: Recycled Polyethylene
Plastic
Color: May vary
Pkg: None

TF 1029 W24 Recycle Waste Container w/Push Door Top

1.1 SUMMARY

- A. Section includes: Furnish Precast Concrete Waste Containers indicated on drawings or specified herein.

1.2 REFERENCES

- A. American Society for Testing & Materials
 - 1. ASTM C33 2. ASTM C150 3. ASTM C31

1.5 SUBMITTALS

- A. Submit product data, shop drawings and samples.
 - 1. Product Data: Manufacturer's specifications and technical data edited specifically for proposed system, including the following specific information:
 - a. Detailed specification of construction fabrication.
 - b. Manufacturer's installation instructions
 - c. Maintenance literature
 - d. Product warranty
 - 2. Shop Drawings: Indicate pertinent dimensions, general construction, component connections anchoring methods, hardware and installation procedures.
 - 3. Samples as requested by Architect.

1.6 QUALITY ASSURANCE

- A. Qualifications of Manufacturer: Manufacturer to be prequalified by specifier prior to bidding. Failure to comply will result in disqualification of bid. Manufacturer to have at least five years experience in the manufacturer of precast concrete waste containers field proven for at least five years.

1.10 WARRANTY

Manufacturer shall submit a written warranty for precast products for the period of two (2) years upon acceptance of products.

2.1 MANUFACTURERS

- A. Acceptable manufacturer for Precast Concrete Waste Containers to be known as:
Wausau Tile, Inc.
PO Box 1520, Wausau, WI 54402-1520.
(800) 388-8728 FAX (715) 355-4627
- B. Clarification Note: Drawings and installation specification are based on manufacturers proprietary literature from Wausau Tile, Inc. Other manufacturers shall comply with minimum levels of material and detailing indicated on drawings or specified herein.
- C. All Precast products for this project shall be of one manufacturer.

2.2 MATERIALS

- A. Portland Cement: ASTM C150 specifications for Portland Cement.
- B. Aggregates: All aggregates to meet ASTM C33 specifications, to be cleaned of foreign matter and properly graded to size.
- C. Coloring: Pigments used shall be inorganic, resistant to alkalinity and used as per manufacturers recommendations.

#