


TF 1222 3 Bin Recycle Center

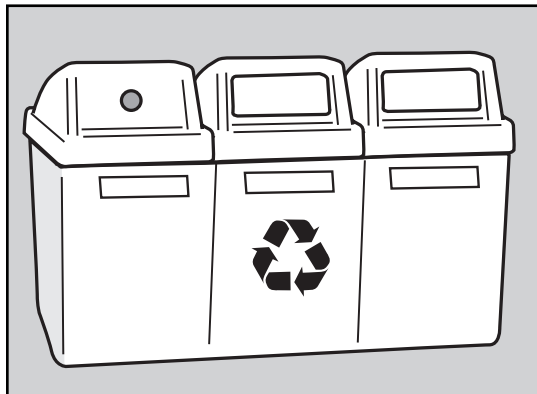

Options

(Note: Options may change without notice. Call to confirm current options.)

Exposed Aggregate:

Tan w/Gray Matrix - Misty Gray w/Gray

Weatherstone:

Sand - Gray - Brown - Buff - Cream
Light Charcoal - French Gray - Brick Red

Granitex

2078F, 4028F, 6208F, 1168F, 2098F

Custom Options Available

Size:	75" x 25" x 47" H.
Weight:	2005 lbs.
Capacity:	(3) - 45 gallon liners.
Material:	Reinforced Concrete.
Colors/Surfaces:	See options.
Reinforcing:	1/4" Dia. steel rebar.
Wall Thickness:	1-3/4" at top with 2% pitch.
Hardware:	(6) - 1/2" Dia. elevator bolts, inserted on site. (6) - 1/2" zinc alloy inserts. (18) - 1/4" Dia. zinc alloy inserts. (4) - 5/8" Dia. lifting inserts.
Drain Hole:	(3) - 2" Dia.
Packaging:	Palletized.
Maintenance:	Occasionally rinse with water & mild detergent. Re-seal annually.
Anchoring:	Optional.
Logo Option:	3 - 12 1/2" W x 3 1/2" H x 1/4" clear lucite silk screened with permanent inks. Installed with two tamper proof rivets per logo.
Note:	International recycling symbol standard as cast-in-place logo.

Top Options . . .

Colors may change without notice. Call to confirm current options.)

TF 1440 W024 Pitch-In Top

Size: 25" Sq. x 6-3/4" H
Weight: 8 lbs
Colors: Brown, Gray, Bronze
Opening: 9-5/8" Sq.

TF 1446 WT24 Four-Way Top

Size: 25" Sq. x 12-1/2" H
Weight: 8 lbs
Colors: Brown, Gray, Bronze
Openings: (4) - 15" x 5-3/4" Sq.

TF 1429 W24 Can Recycle Top

Size: 25" Sq. x 13" H
Weight: 12 lbs
Colors: Blue
Openings: 4" Dia. hole for cans
Feature: "Aluminum Cans"
Thermo transferred in white.

TF 1430 W24 Push-Door Top

Size: 25" Sq. x 13" H
Weight: 12 lbs
Colors: Brown, Gray, Blue, Bronze
Opening: 15 1/2" W x 6 1/2" H
Features: Self Closing

Common Top Specifications

Material:	Polyethylene Plastic.
Hardware:	(2) each top - Security Cables. (2) each top - 1024 Hex head bolts. (2) each top - Shouldered screws. (2) each top - 1024 Washers. (2) each top - Shouldered allen bolts.
Packaging:	Shipped in carton.
Maintenance:	Clean with mild soap and water.
Installation:	Attach to container with security cable.

TF 1640 Liner

Size: 19-5/8" Sq. x 30-1/2" H.
Weight: 13 lbs.
Capacity: 45 gallons
Color: May vary
Material: Recycled Polyethylene Plastic.

1.1 SUMMARY

- A. Section includes: Furnish Precast Concrete Waste Containers indicated on drawings or specified herein.

1.2 REFERENCES

- A. American Society for Testing & Materials
1. ASTM C33 2. ASTM C150 3. ASTM C31

1.5 SUBMITTALS

- A. Submit product data, shop drawings and samples.
1. Product Data: Manufacturer's specifications and technical data edited specifically for proposed system, including the following specific information:
 - a. Detailed specification of construction fabrication.
 - b. Manufacturer's installation instructions
 - c. Maintenance literature
 - d. Product warranty
 2. Shop Drawings: Indicate pertinent dimensions, general construction, component connections anchoring methods, hardware and installation procedures.
 3. Samples as requested by Architect.

1.6 QUALITY ASSURANCE

- A. Qualifications of Manufacturer: Manufacturer to be prequalified by specifier prior to bidding. Failure to comply will result in disqualification of bid. Manufacturer to have at least five years experience in the manufacturer of precast concrete waste containers field proven for at least five years.

1.10 WARRANTY

Manufacturer shall submit a written warranty for precast products for the period of two (2) years upon acceptance of products.


2.1 MANUFACTURERS

- A. Acceptable manufacturer for Precast Concrete Waste Containers to be known as:
Wausau Tile, Inc. Terra-Form Division.
PO Box 1520, Wausau, WI 54402-1520.
(800) 388-8728 FAX (715) 355-4627
- B. Clarification Note: Drawings and installation specification are based on manufacturers proprietary literature from Wausau Tile, Inc. Other manufacturers shall comply with minimum levels of material and detailing indicated on drawings or specified herein.
- C. All Precast products for this project shall be of one manufacturer.


2.2 MATERIALS

- A. Portland Cement: ASTM C150 specifications for Portland Cement.
- B. Aggregates: All aggregates to meet ASTM C33 specifications, to be cleaned of foreign matter and properly graded to size.
- C. Coloring: Pigments used shall be inorganic, resistant to alkalinity and used as per manufacturers recommendations.


#

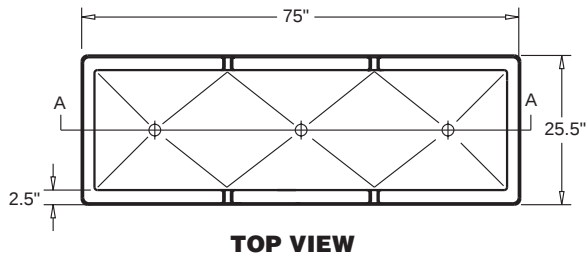

TOP VIEW

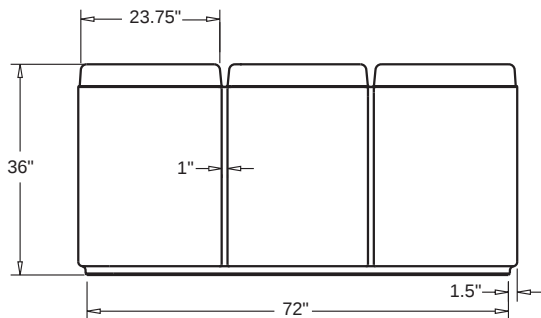

FRONT VIEW

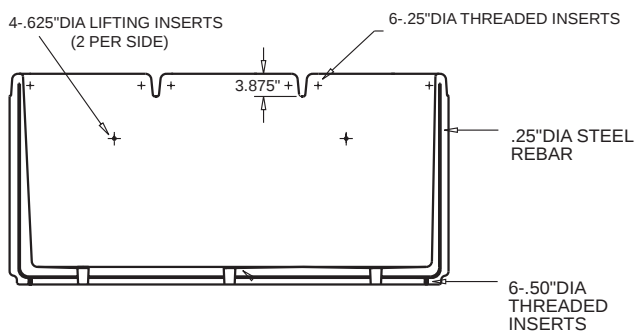

SECTION A-A