




Manufacturer
Of
Architectural
And
Commercial
Grade
Windows,
Curtain Walls,
Entrances,
And
Storefronts

EFCO CORPORATION
1000 COUNTY RD
MONETT, MO 65708
800.221.4169

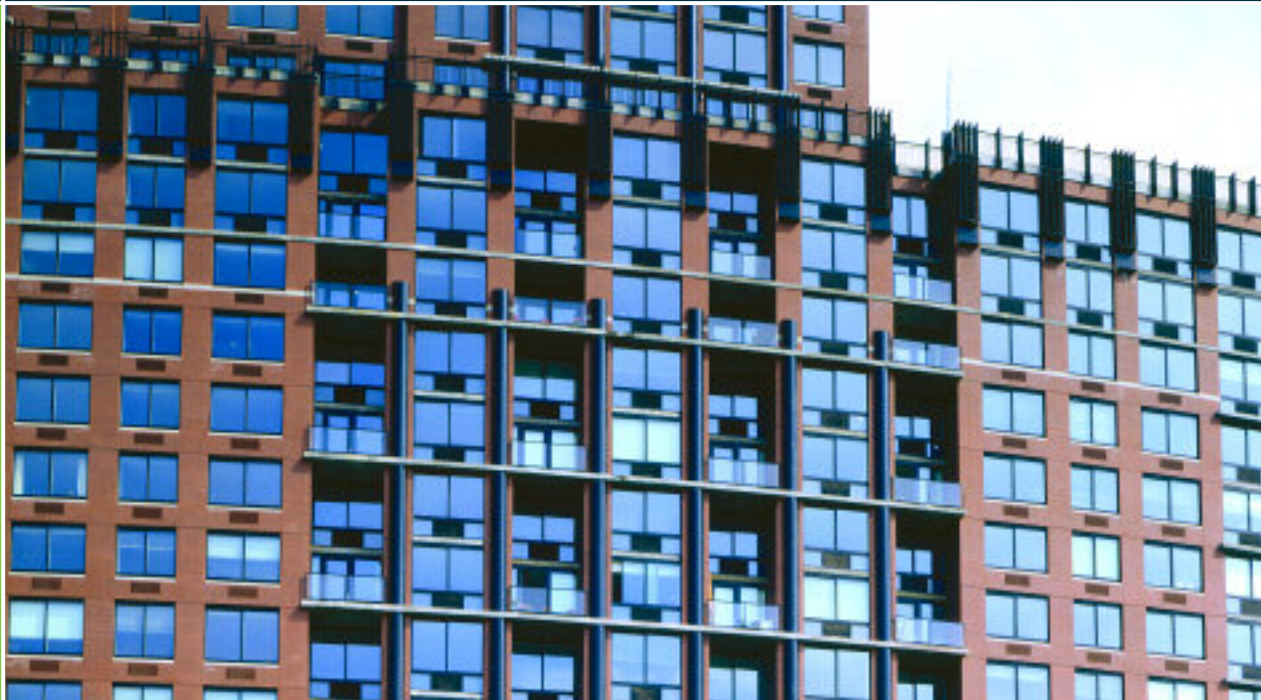

Series 3015 Thermal • Series 3017 Thermal Fixed 4 1/2" Heavy Commercial Sliding Glass Door

Configurations XO • OX • OXXO • OXOR • OXOL • Fixed

The Series 3015 retains an AAMA Heavy Commercial and Architectural grade rating to meet the most demanding specifications. This series is designed for high-rise residential and condominiums, making the 3015 an attractive product for a wide range of applications where security, thermal performance, and dual finish capability is required. Multiple glazing options provide flexibility to meet specific design requirements. E-Strut™ thermal isolators provide outstanding thermal performance, enhancing energy saving potential. Series 3015 sliding glass door provides the complete solution for your fenestration needs.


Features

Benefits

E-Strut™ thermal isolator	Improves U-Value performance Dual finish capability Completely eliminates dry shrinkage
Heavy-duty meeting rails	Offers superior structural performance
Cam sash design and continuous interlock meeting rails	Yields superior air, water, and structural performance
Accepts 1/4" and 1" glazing	Flexibility in design requirements for glazing
Sash glides on adjustable tandem steel ball bearing rollers	Allows easier operation
Raised sill track	Minimizes the effects of debris and dirt buildup on the sill
Screens available	Ventilation
Heavy-duty screen door frames are extruded aluminum alloy with rollers at the head	Stronger, more durable screens Operation is not hindered by debris and dirt build-up on the sill
Glazing depths of 1/4" or 1" are accommodated	Allows 1" insulating units
Anodized or painted finishes available	Unlimited options make your design project more expressive



Series 3015 Thermal • Series 3017 Thermal Fixed 4 1/2" Heavy Commercial Sliding Glass Door

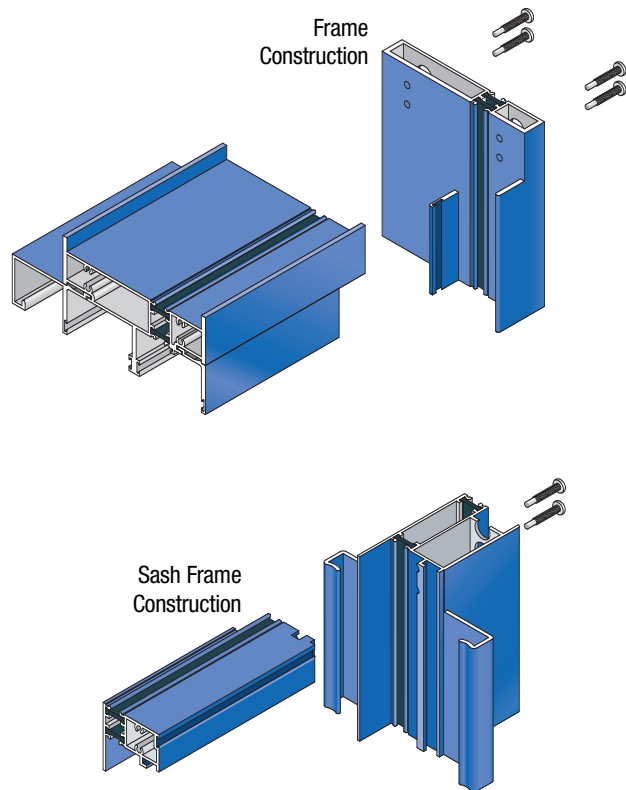

Performance Data

S-3015 Sliding Glass Door Heavy Commercial

AAMA Rating (NAFS-02)	SGD-HC90
Air Infiltration	<.10 cfm/sf @ 6.24 psf
Water	No Leakage @ 12.0 psf
Structural	±135.0 psf
CRF-Frame (1503.1)	49°
CRF-Glass (1503.1)	52°
U-Value (1503.1)	.65°

S-3015 Sliding Glass Door Architectural Grade

AAMA Rating (NAFS-02)	SGD-AW55
Air Infiltration	.13 cfm/sf @ 6.24 psf
Water	No Leakage @ 12.0 psf
Structural	±82.5 psf
CRF-Frame (1503.1)	49°
CRF-Glass (1503.1)	52°
U-Value (1503.1)	.65°

A = Estimated values and/or designations

B = Non-standard size or configuration

C = Dual glazed

D = 1" Insulated - 1/4" clear, 1/2" air, 1/4" clear

E = 1" Insulated - 1/4" clear (Low Emissivity), 1/2" air, 1/4" clear

F = 1" Insulated - 1/4" clear (Low Emissivity), 1/2" argon, 1/4" clear

G = 1" Insulated - 1/4" clear, 1/2" air, 1/4" clear (Low Emissivity)

S-3017 Corresponding Fixed Window Heavy Commercial

AAMA Rating (101-97)	F-HC80 ^A
Air Infiltration	<.06 cfm/sf @ 6.24 psf ^A
Water	No Leakage @ 12.0 psf ^A
Structural	±120.0 psf ^A
CRF-Frame (1503-98)	68° ^{A, D}
CRF-Glass (1503-98)	59° ^{A, D}
U-Value (1503-98)	.61° ^{A, D}

Series 3015 Hardware Chart	Stainless Steel Dead Bolt	Interior Thumb Turn	Interior and Exterior Extruded Pull Handle	Exterior Cylinder Lock w/ Interior Thumb Turn	Stainless Steel Roller Track Cover	Adjustable Stainless Steel Ball Bearing Rollers
Door Hardware	S	S	S	O	S	S

O -Optional
S -Standard
blank - N/A

S-3015 Glazing Chart	Polycarbonate			Glass or Panel															
	1/8"	3/16"	1/4"	1/8"	.156" ^{**}	3/16"	.200" ^{**}	1/4"	1/4" ^{***}	1/2"	5/8"	3/4"	7/8"	1"	1-1/8"	1-1/4"	1-1/2"	1-3/4"	2"
Monolithic & Insulated Glass								A						A					

*-Obscure Glass Thickness
**-Laminated Glass
Thickness

A-Available Glazing Option
blank - N/A

Fixed S-3017 Glazing Chart	Polycarbonate			Glass or Panel															
	1/8"	3/16"	1/4"	1/8"	.156" ^{**}	3/16"	.200" ^{**}	1/4"	1/4" ^{***}	1/2"	5/8"	3/4"	7/8"	1"	1-1/8"	1-1/4"	1-1/2"	1-3/4"	2"
Monolithic & Insulated Glass										A				A					

Series 3015 Thermal • Series 3017 Thermal Fixed 4 1/2" Heavy Commercial Sliding Glass Door



Frame Construction

The frames have a depth of 4 1/2" and are constructed of 6063-T6 aluminum alloy. Nominal material wall thickness for the frame is .080". Corners are of screw spline construction and sealed. See Illustration 1.

Sash Frame Construction

The sash consists of tubular aluminum members with .080" nominal material wall thickness of 6063-T6 alloy. Corners are of screw spline construction and sealed. Weather-stripped interlock at the sash meeting rail(s) is standard. This offers superior weathering and structural performance. See Illustration 2.

Thermal Barrier

All frames and vents are thermally isolated with two thermal struts consisting of glass reinforced polyimide nylon, mechanically crimped in raceways extruded in the exterior and interior extrusions. See Illustration 3.

Weather Stripping

All sash are weather-stripped with TRIPLE FIN™.

Screens

Screen frames are extruded 6063-T6 aluminum alloy with lock. 18 x 16 mesh screens are available in fiber-glass and .011" diameter aluminum. 18 x 18 mesh screens are available in .009" diameter stainless steel.

Hardware

The standard locking hardware is Sash Controls dead lock. The sash glides on a pair of tandem rollers over a raised sill track, minimizing the effects of dust and dirt build-up. See Hardware Chart for available hardware types and more information.

Glazing

Doors are glazed with an extruded aluminum snap-in glazing bead and drive-in wedge gasket. Glazings of 1/4" or 1" are accommodated.

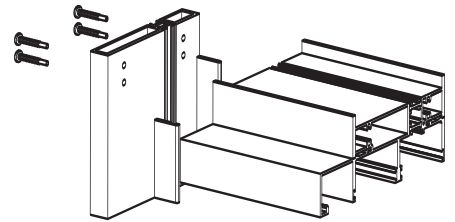


Illustration 1

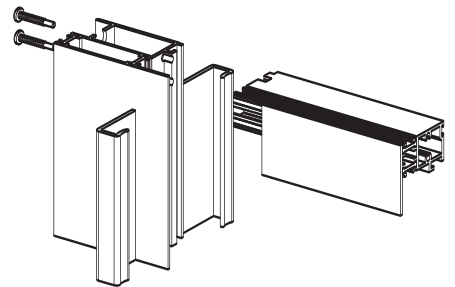


Illustration 2







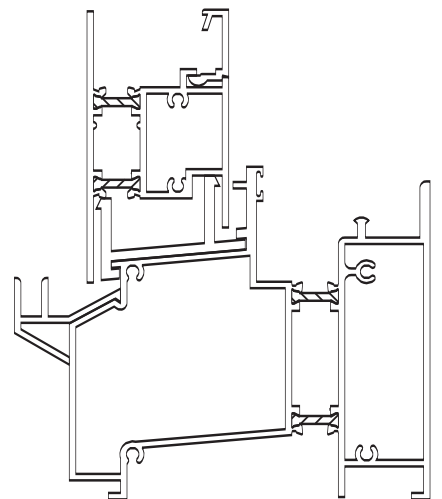


Illustration 3

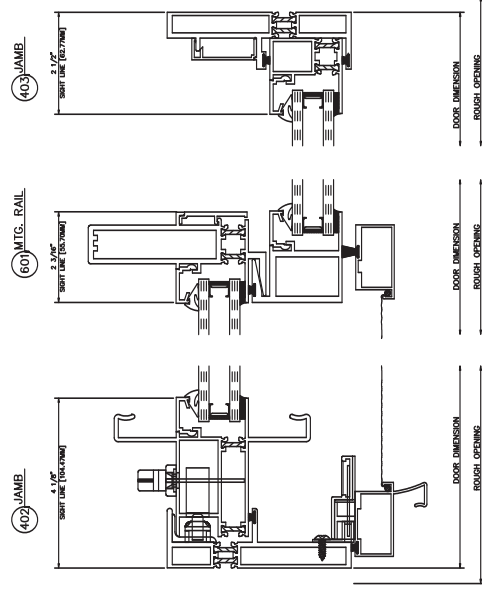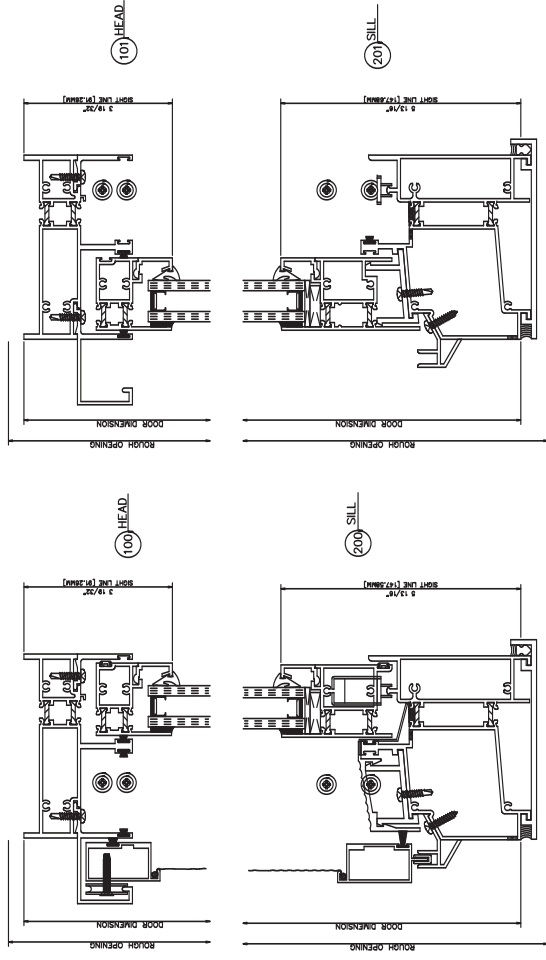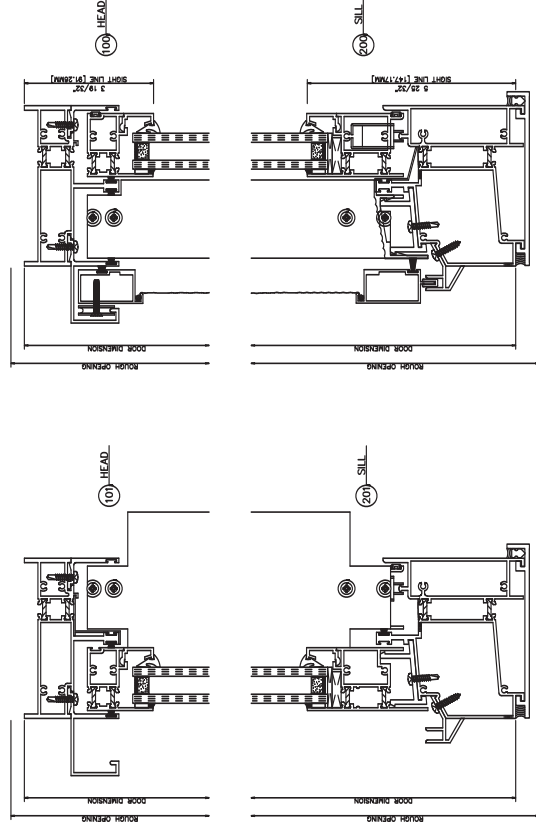




3015 XO
Inside Glazed

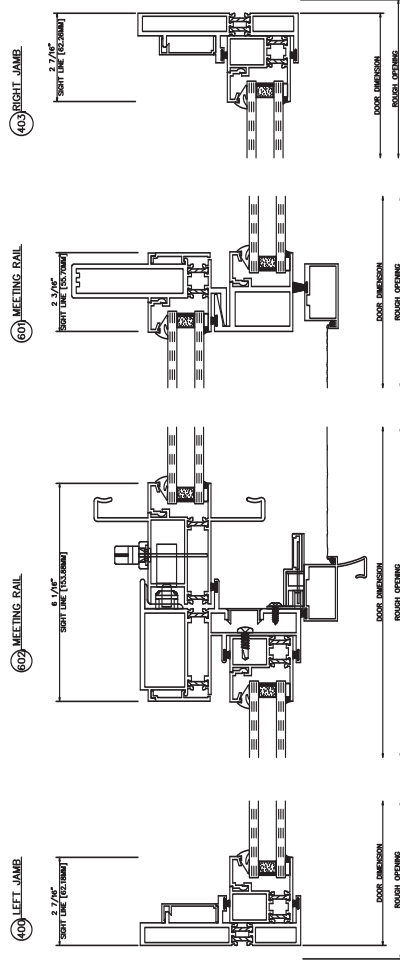


3015 OXO
Inside Glazed




3015 OXXO

Inside Glazed

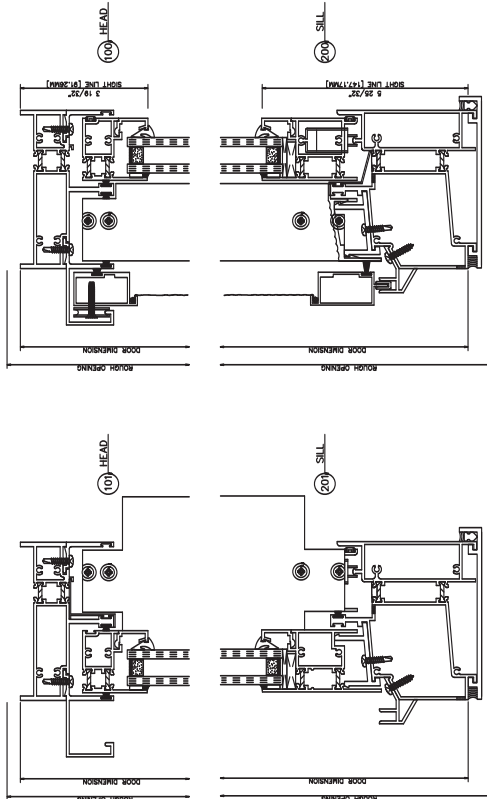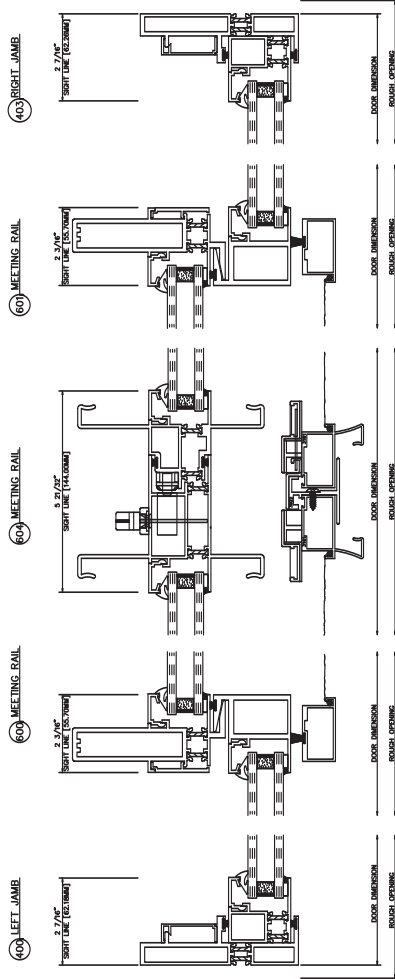


1 1/4"
MONOLITHIC

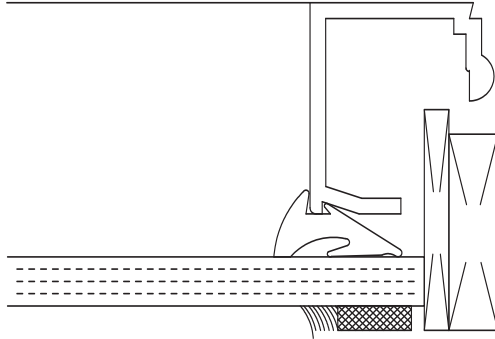

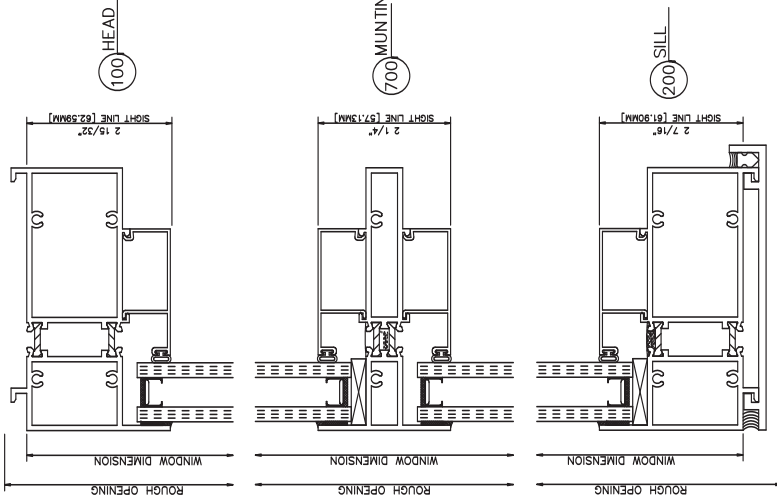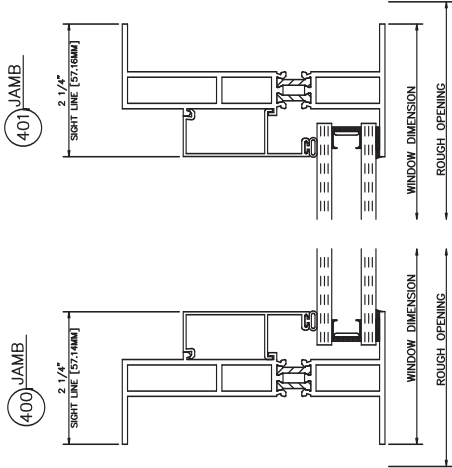

1" INSULATED
3/16"-3/16"

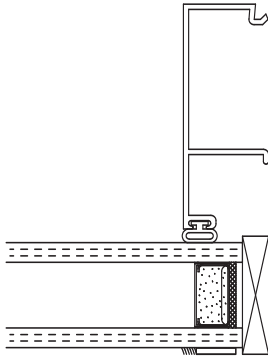

1/2" OPEN
GLAZE

