


# **COMBOLIGHT**


## **SwingAway Series**

---

# COMBOLIGHT® SwingAway Recessed

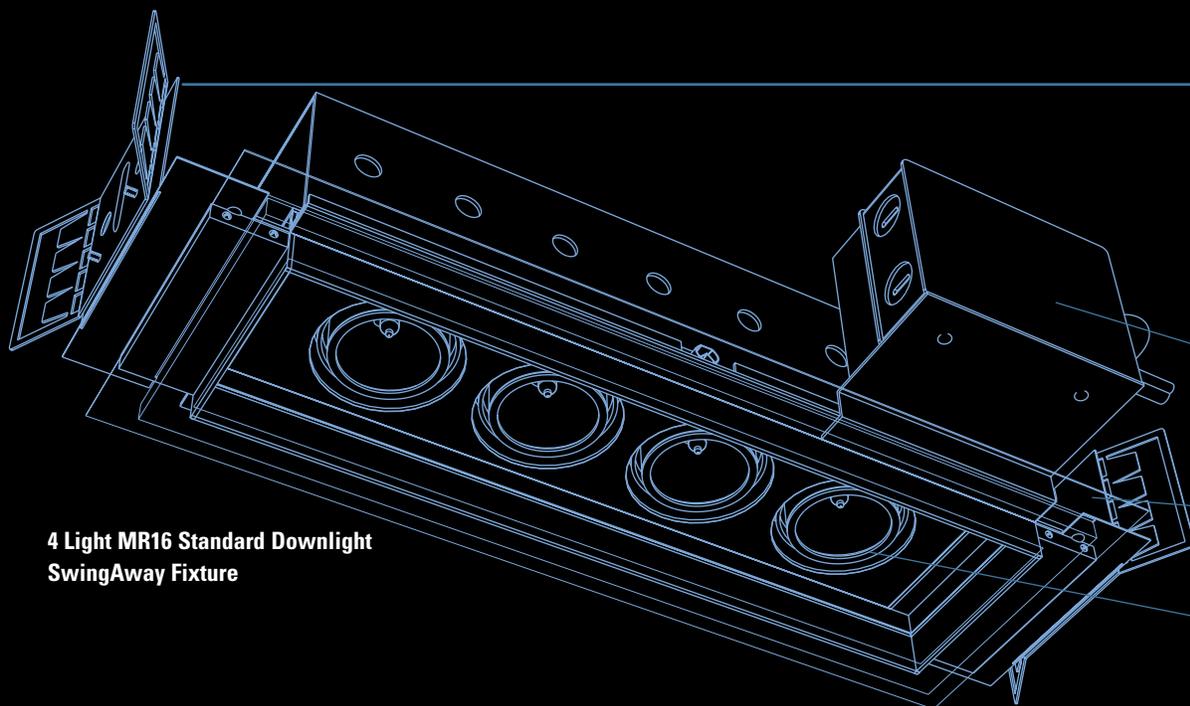

**4 Light MR16 Standard Downlight  
SwingAway Fixture**

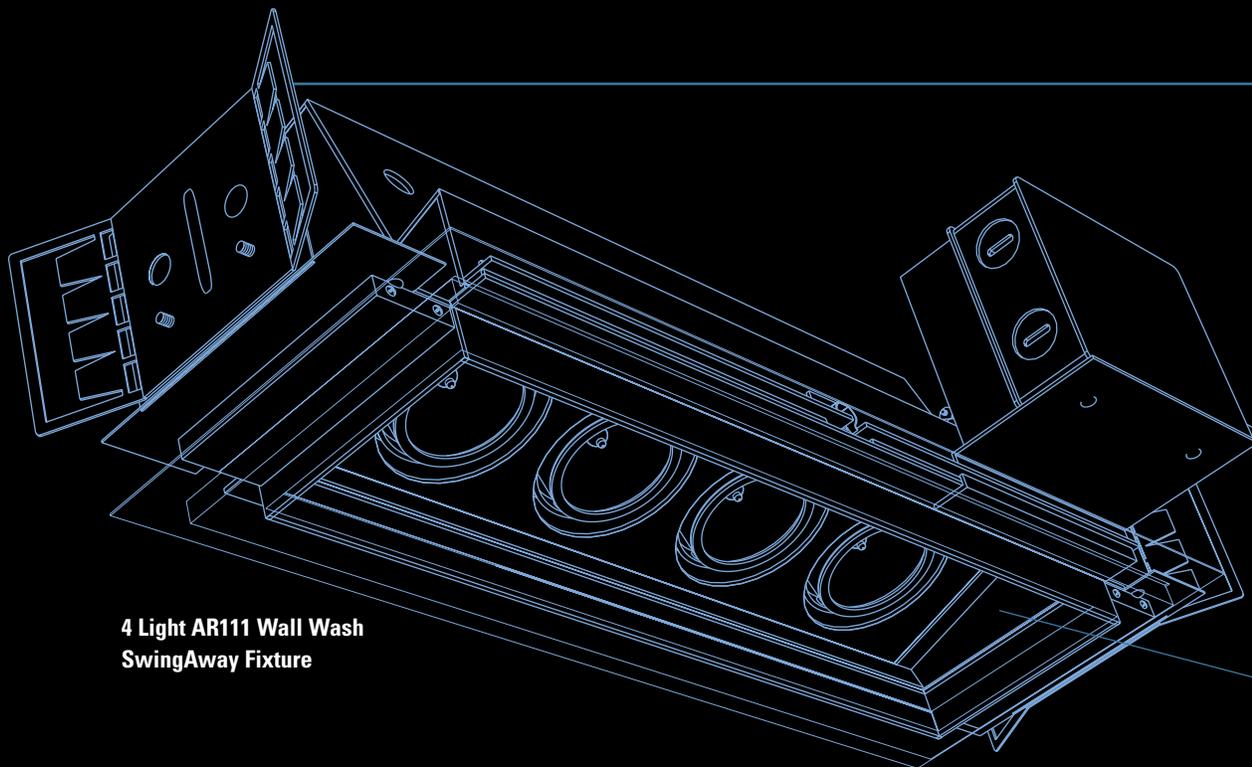

**4 Light AR111 Wall Wash  
SwingAway Fixture**

## Easy Access Recessed Fixture

### Standard Downlight Housing

- Suitable for recessed new construction downlighting applications where easy fixture maintenance is desired
- Fixture housing "swings away" with a simple push of the hand for above ceiling access
- Transformers and wiring are conveniently located on the fixtures mounting frame
- Includes a perforated mudding frame for trimless ceiling installation. Can accommodate 1/2" to 1" ceiling thickness
- Double gimbal lamp holders provide 90° x 90° adjustability
- Electronic transformer with fuse and short circuit protection

### Wall Wash Housing

- Suitable for recessed new construction downlighting and/or wall wash applications where easy fixture maintenance is desired
- Housing sits at a 22° sloped pitch for wall wash applications



Standard Downlight SwingAway Fixture



Wall Wash SwingAway Fixture








## Recessed Low Voltage MR16 Swing-Away Standard Trimless Fixture

- Standard new construction trimless fixture
- Adjustable Plaster Frame can accommodate 1/2" to 1" Ceiling Thickness
- Features a 3/4" fixture regress for a new architectural look
- Electrical J-Box and Transformers located on plaster frame with easy below-ceiling access via swingaway housing. Lamp housing swings up and away with a simple push of the hand
- Double Gimbal lamp holders provide 45° x 90° adjustability
- Includes butterfly brackets for black iron installations
- Electronic transformer with fuse and short circuit protection

| Fixture Config. | A<br>Length | B1 / B2<br>Height | C<br>Aperture<br>Length | D1/D2<br>Width  | Ceiling<br>Cut-out |
|-----------------|-------------|-------------------|-------------------------|-----------------|--------------------|
| 1 Light         | 11.80"      | 6.93" / 8.16"     | 3.95"                   | 10.38" / 16.12" | 5.70" x 5.70"      |
| 2 Light         | 16.48"      | 6.93" / 8.16"     | 8.62"                   | 10.38" / 16.12" | 10.39" x 5.70"     |
| 3 Light         | 20.40"      | 6.93" / 8.16"     | 12.55"                  | 10.38" / 16.12" | 14.31" x 5.70"     |
| 4 Light         | 24.33"      | 6.93" / 8.16"     | 16.48"                  | 12.52" / 18.26" | 18.24" x 5.70"     |

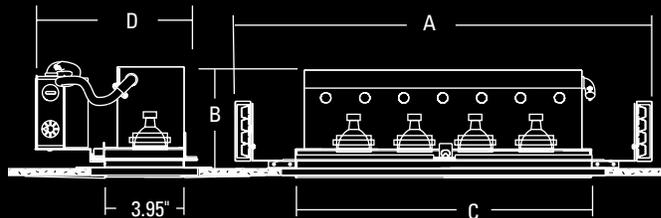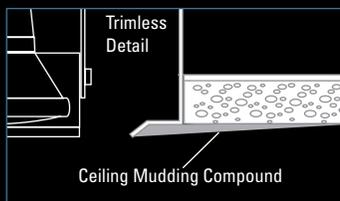

## SWINGAWAY STANDARD HOUSING


| FIXTURE TYPE | Catalog # | Description                    |
|--------------|-----------|--------------------------------|
| 1            | COSWG116  | (1) One Light MR16 Swingaway   |
|              | COSWG216  | (2) Two Light MR16 Swingaway   |
|              | COSWG316  | (3) Three Light MR16 Swingaway |
|              | COSWG416  | (4) Four Light MR16 Swingaway  |

| INTERIOR | Catalog # | Description            |
|----------|-----------|------------------------|
| 2        | BK        | Black                  |
|          | WH        | White                  |
|          | S         | Industrial Silver      |
|          | PT        | Custom Color (Specify) |

| WATTAGE | Catalog # | Description                        |
|---------|-----------|------------------------------------|
| 3       | 50        | 50 Watt MR16 Bi-Pin 12V (Standard) |
|         | 75        | 75 Watt MR16 Bi-Pin 12V            |

| VOLTAGE | Catalog # | Description         |
|---------|-----------|---------------------|
| 4       | 120       | 120 Volt (Standard) |
|         | 277       | 277 Volt            |

Lamp housing swings up and away with a simple push of the hand.

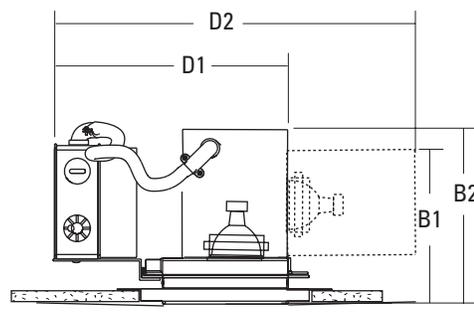



### Optional Accessories - See page 216 for details.

|        |        |         |        |
|--------|--------|---------|--------|
|        |        |         |        |
| Baffle | Snoots | Louvers | Lenses |

### Ordering Example

| FIXTURE TYPE | INTERIOR | WATTAGE | VOLTAGE |
|--------------|----------|---------|---------|
| COSWG416     | BK       | 50      | 120     |

Four Light Swingaway Standard Fixture, Black Interior, MR16 50 Watt, 120 Volt

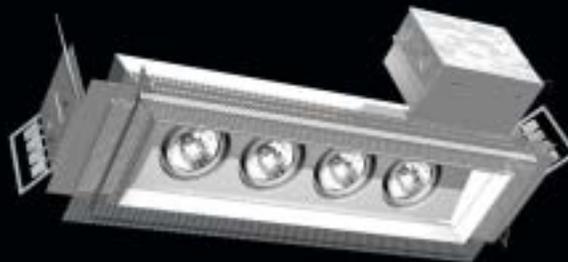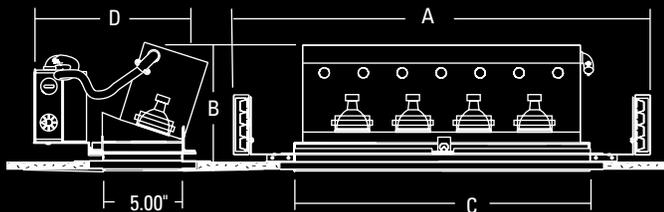

**SWINGAWAY WALL WASH HOUSING**

1

| FIXTURE TYPE | Catalog #          | Description                    |
|--------------|--------------------|--------------------------------|
|              | <b>COSWGSLP116</b> | (1) One Light MR16 Swingaway   |
|              | <b>COSWGSLP216</b> | (2) Two Light MR16 Swingaway   |
|              | <b>COSWGSLP316</b> | (3) Three Light MR16 Swingaway |
|              | <b>COSWGSLP416</b> | (4) Four Light MR16 Swingaway  |

2

| INTERIOR  | Catalog # | Description            |
|-----------|-----------|------------------------|
| <b>BK</b> |           | Black                  |
| <b>WH</b> |           | White                  |
| <b>S</b>  |           | Industrial Silver      |
| <b>PT</b> |           | Custom Color (Specify) |


3

| WATTAGE   | Catalog # | Description                        |
|-----------|-----------|------------------------------------|
| <b>50</b> |           | 50 Watt MR16 Bi-Pin 12V (Standard) |
| <b>75</b> |           | 75 Watt MR16 Bi-Pin 12V            |

4

| VOLTAGE    | Catalog # | Description         |
|------------|-----------|---------------------|
| <b>120</b> |           | 120 Volt (Standard) |
| <b>277</b> |           | 277 Volt            |

Lamp housing swings up and away with a simple push of the hand.

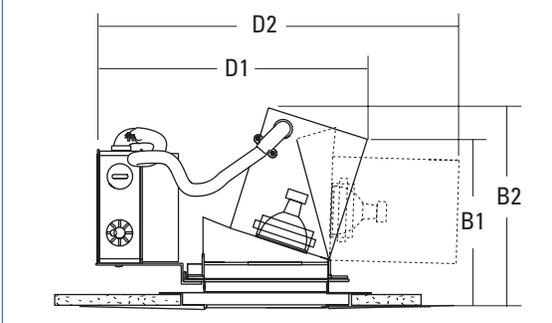

Optional Accessories - See page 216 for details.

|               |               |                |               |
|---------------|---------------|----------------|---------------|
|               |               |                |               |
| <b>Baffle</b> | <b>Snoots</b> | <b>Louvers</b> | <b>Lenses</b> |

**Ordering Example**



| FIXTURE TYPE       | INTERIOR  | WATTAGE   | VOLTAGE    |
|--------------------|-----------|-----------|------------|
| <b>COSWGSLP416</b> | <b>BK</b> | <b>50</b> | <b>120</b> |

Four Light Swingaway Wall Wash Fixture, Black Interior, MR16 50 Watt, 120 Volt

**Recessed Low Voltage MR16 Swing-Away Wall Wash Trimless Fixture**

- Standard new construction trimless fixture for wall wash and downlighting applications
- Fixture features a 22° sloped pitch for targeting vertical surfaces
- Adjustable Plaster Frame can accommodate 1/2" to 1" Ceiling Thickness
- Features a 3/4" fixture regress for a new architectural look
- Electrical J-Box and Transformers located on plaster frame with easy below-ceiling access via swingaway housing. Lamp housing swings up and away with a simple push of the hand
- Double Gimbal lamp holders provide 45° x 90° adjustability
- Includes butterfly brackets for black iron installations
- Electronic transformer with fuse and short circuit protection

| Fixture Config. | A Length | B1 / B2 Height | C Aperture Length | D1/D2 Width     | Ceiling Cut-out |
|-----------------|----------|----------------|-------------------|-----------------|-----------------|
| <b>1 Light</b>  | 12.85"   | 6.67" / 6.97"  | 5.00"             | 10.67" / 14.90" | 6.75" X 6.75"   |
| <b>2 Light</b>  | 16.74"   | 6.67" / 6.97"  | 8.93"             | 10.67" / 14.90" | 10.69" X 6.75"  |
| <b>3 Light</b>  | 20.70"   | 6.67" / 6.97"  | 12.85"            | 10.67" / 14.90" | 14.61" X 6.75"  |
| <b>4 Light</b>  | 24.63"   | 6.67" / 6.97"  | 16.78"            | 10.67" / 14.90" | 18.54" X 6.75"  |



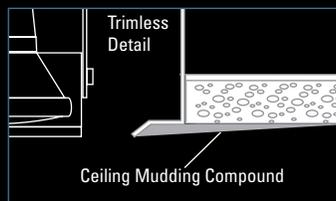




## Recessed Low Voltage AR111 Swing-Away Standard Trimless Fixture

- Standard new construction trimless fixture
- Adjustable Plaster Frame can accommodate 1/2" to 1" Ceiling Thickness
- Features a 3/4" fixture regress for a new architectural look
- Electrical J-Box and Transformers located on plaster frame with easy below-ceiling access via swingaway housing. Lamp housing swings up and away with a simple push of the hand
- Double Gimbal lamp holders provide 45° x 90° adjustability
- Includes butterfly brackets for black iron installations
- Electronic transformer with fuse and short circuit protection

| Fixture Config. | A Length | B1 / B2 Height | C Aperture Length | D1/D2 Width     | Ceiling Cut-out |
|-----------------|----------|----------------|-------------------|-----------------|-----------------|
| 1 Light         | 14.68"   | 5.25" / 8.97"  | 7.00"             | 13.62" / 17.62" | 8.73" x 8.73"   |
| 2 Light         | 21.68"   | 5.25" / 8.97"  | 14.00"            | 13.62" / 17.62" | 15.73" x 8.73"  |
| 3 Light         | 28.68"   | 5.25" / 8.97"  | 21.00"            | 13.62" / 17.62" | 22.73" x 8.73"  |
| 4 Light         | 35.68"   | 5.25" / 8.97"  | 28.00"            | 15.75" / 19.75" | 29.73" x 8.73"  |

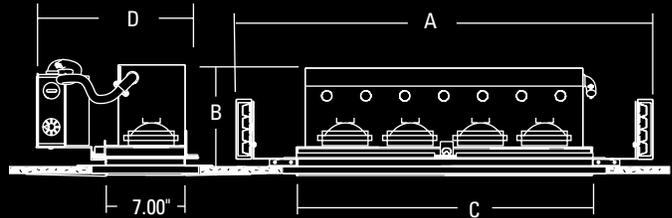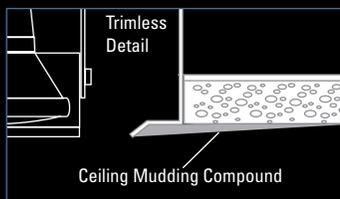

## SWINGAWAY STANDARD HOUSING

1

| FIXTURE TYPE | Catalog # | Description                     |
|--------------|-----------|---------------------------------|
|              | COSWG1010 | (1) One Light AR111 Swingaway   |
|              | COSWG1000 | (2) Two Light AR111 Swingaway   |
|              | COSWG1100 | (3) Three Light AR111 Swingaway |
|              | COSWG1200 | (4) Four Light AR111 Swingaway  |

2

| INTERIOR | Catalog # | Description            |
|----------|-----------|------------------------|
|          | BK        | Black                  |
|          | WH        | White                  |
|          | S         | Industrial Silver      |
|          | PT        | Custom Color (Specify) |


3

| WATTAGE | Catalog # | Description        |
|---------|-----------|--------------------|
|         | 35        | 35 Watt AR111 12V  |
|         | 50        | 50 Watt AR111 12V  |
|         | 75        | 75 Watt AR111 12V  |
|         | 100       | 100 Watt AR111 12V |

4

| VOLTAGE | Catalog # | Description         |
|---------|-----------|---------------------|
|         | 120       | 120 Volt (Standard) |
|         | 277       | 277 Volt            |

Lamp housing swings up and away with a simple push of the hand.

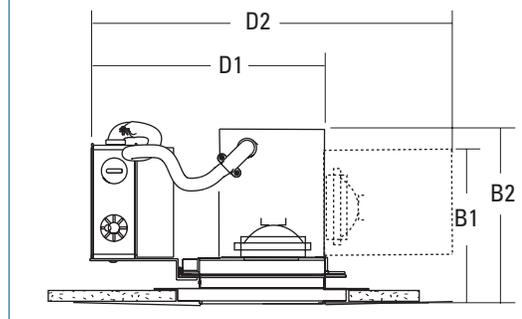


### Optional Accessories - See page 216 for details.

|        |        |         |        |
|--------|--------|---------|--------|
|        |        |         |        |
| Baffle | Snoots | Louvers | Lenses |

### Ordering Example

| FIXTURE TYPE | INTERIOR | WATTAGE | VOLTAGE |
|--------------|----------|---------|---------|
| COSWG1200    | BK       | 50      | 120     |

Four Light Swingaway Standard Fixture, Black Interior, AR111 50 Watt, 120 Volt

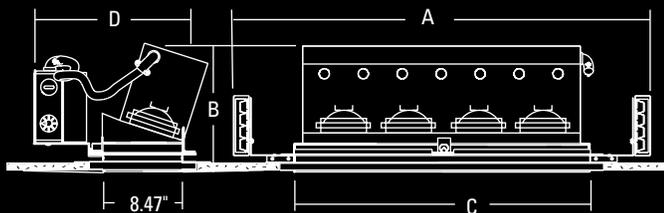

**SWINGAWAY WALL WASH HOUSING**

1

| FIXTURE TYPE | Catalog #           | Description                     |
|--------------|---------------------|---------------------------------|
|              | <b>COSWGSLP1010</b> | (1) One Light AR111 Swingaway   |
|              | <b>COSWGSLP1000</b> | (2) Two Light AR111 Swingaway   |
|              | <b>COSWGSLP1100</b> | (3) Three Light AR111 Swingaway |
|              | <b>COSWGSLP1200</b> | (4) Four Light AR111 Swingaway  |

2

| INTERIOR  | Catalog # | Description            |
|-----------|-----------|------------------------|
| <b>BK</b> |           | Black                  |
| <b>WH</b> |           | White                  |
| <b>S</b>  |           | Industrial Silver      |
| <b>PT</b> |           | Custom Color (Specify) |


3

| WATTAGE    | Catalog # | Description        |
|------------|-----------|--------------------|
| <b>35</b>  |           | 35 Watt AR111 12V  |
| <b>50</b>  |           | 50 Watt AR111 12V  |
| <b>75</b>  |           | 75 Watt AR111 12V  |
| <b>100</b> |           | 100 Watt AR111 12V |

4

| VOLTAGE    | Catalog # | Description         |
|------------|-----------|---------------------|
| <b>120</b> |           | 120 Volt (Standard) |
| <b>277</b> |           | 277 Volt            |

Lamp housing swings up and away with a simple push of the hand.

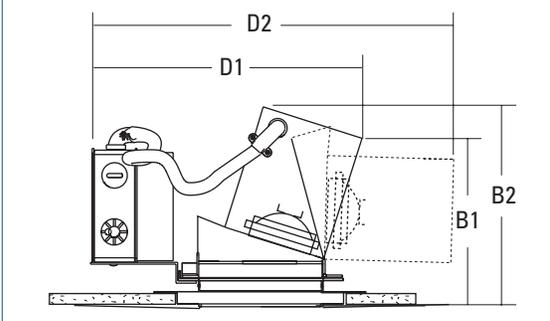

Optional Accessories - See page 216 for details.

|               |               |                |               |
|---------------|---------------|----------------|---------------|
|               |               |                |               |
| <b>Baffle</b> | <b>Snoots</b> | <b>Louvers</b> | <b>Lenses</b> |

**Ordering Example**

| FIXTURE TYPE        | INTERIOR  | WATTAGE   | VOLTAGE    |
|---------------------|-----------|-----------|------------|
| <b>COSWGSLP1200</b> | <b>BK</b> | <b>50</b> | <b>120</b> |

Four Light Swingaway Wall Wash Fixture, Black Interior, AR111 50 Watt, 120 Volt

**Recessed Low Voltage AR111 Swing-Away Wall Wash Trimless Fixture**

- Standard new construction trimless fixture for wall wash and downlighting applications
- Fixture features a 22° sloped pitch for targeting vertical surfaces
- Adjustable Plaster Frame can accommodate 1/2" to 1" Ceiling Thickness
- Features a 3/4" fixture regress for a new architectural look
- Electrical J-Box and Transformers located on plaster frame with easy below-ceiling access via swingaway housing. Lamp housing swings up and away with a simple push of the hand
- Double Gimbal lamp holders provide 45° x 90° adjustability
- Includes butterfly brackets for black iron installations
- Electronic transformer with fuse and short circuit protection

| Fixture Config. | A Length | B1 / B2 Height | C Aperture Length | D1/D2 Width     | Ceiling Cut-out |
|-----------------|----------|----------------|-------------------|-----------------|-----------------|
| <b>1 Light</b>  | 16.43"   | 8.80" / 9.61"  | 8.47"             | 14.45" / 19.29" | 10.32" X 10.32" |
| <b>2 Light</b>  | 22.83"   | 8.80" / 9.61"  | 14.87"            | 14.45" / 19.29" | 16.74" X 10.32" |
| <b>3 Light</b>  | 29.83"   | 8.80" / 9.61"  | 21.87"            | 14.45" / 19.29" | 23.74" X 10.32" |
| <b>4 Light</b>  | 36.83"   | 8.80" / 9.61"  | 28.87"            | 16.59" / 21.43" | 30.74" X 10.32" |

