


COMBOLIGHT

Combo Classic

Suspended Series

COMBOLIGHT® Combo Classic™

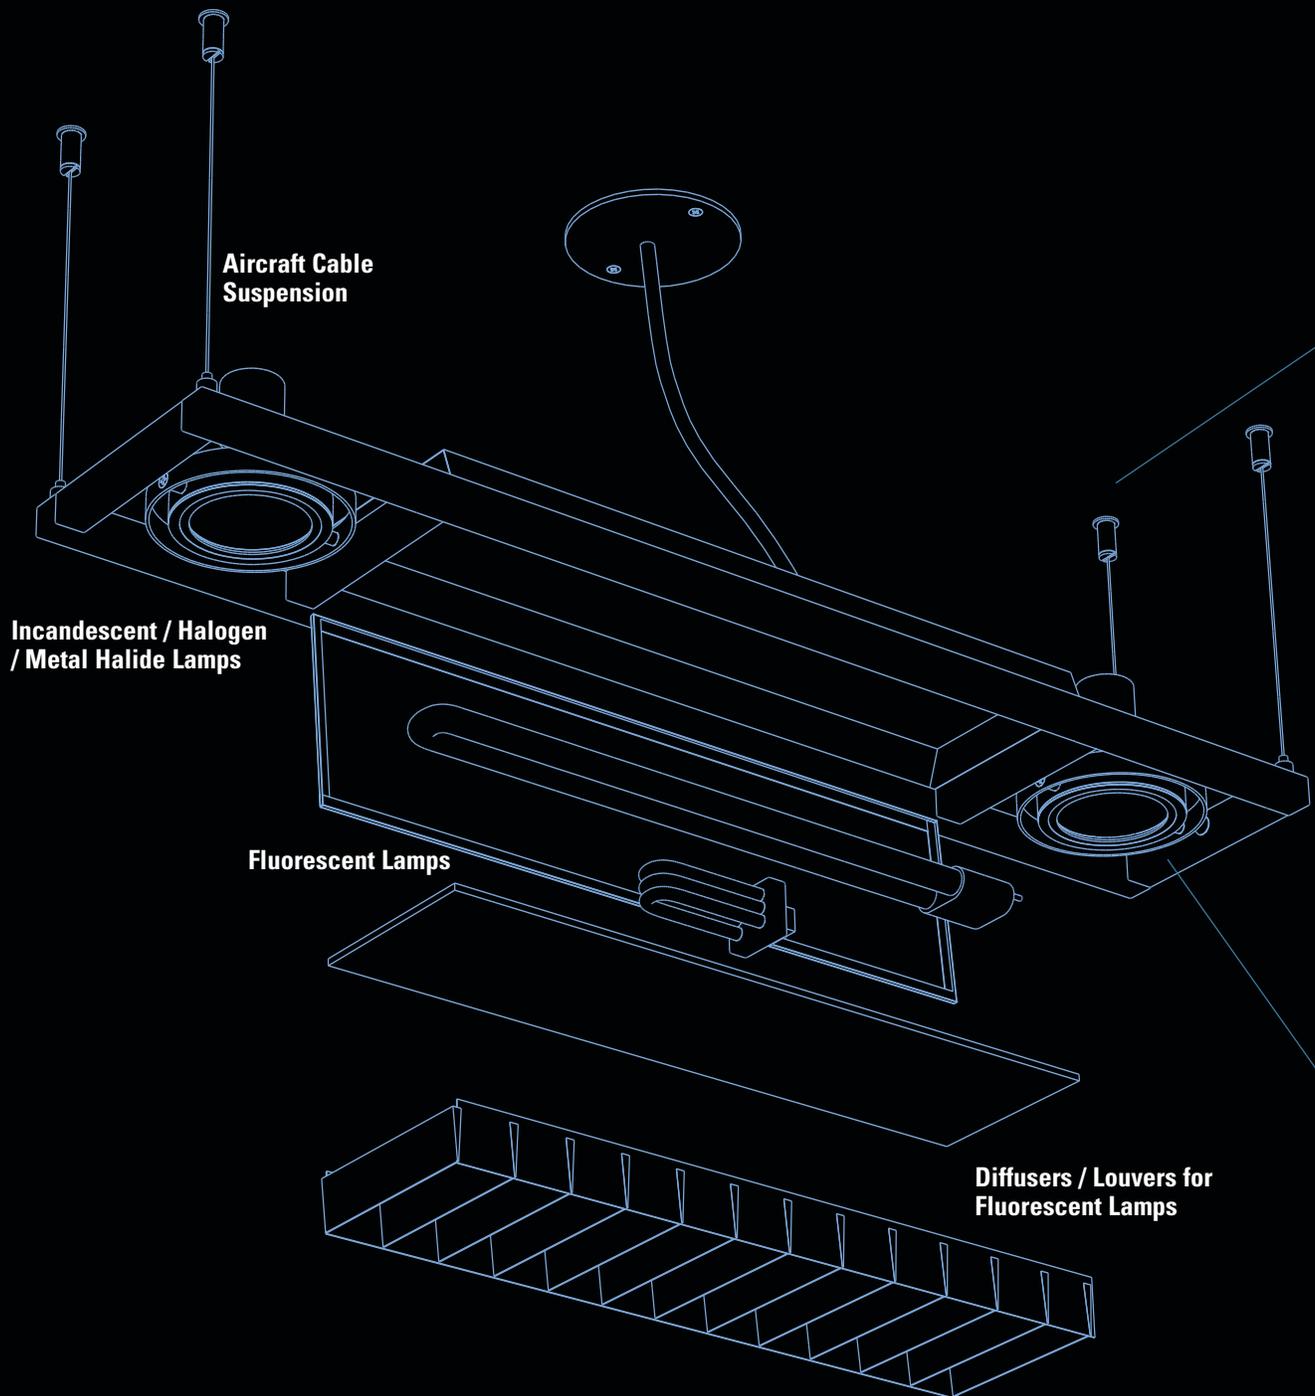

Suspended


Incandescent, Metal Halide & Fluorescent Mixed Lamps

- **Combolight Suspended fixtures with the ability to mix various types of halogen, incandescent and metal halide lamps with a variety of fluorescent lamps**
- **Suitable for all types of horizontal surface mounting**
- **Available standard architectural finishes including black, white, industrial silver and polished chrome**
- **Available in many standard configurations for easy ordering. Custom configurations are available - contact the RSA factory for details**
- **Available lamps include:**

MR16	BIAX™
AR70	PLT
AR111	T5
PAR20	T5HO
PAR20MH	
PAR30	
PAR30MH	
PAR38	
PAR38MH	
T4 G8.5MH	
- **Available with integral power supplies (low voltage electronic transformers or Aromat metal halide ballasts)**
- **Standard double gimbal lamp holders adjust 90° x 90°**
- **Fixture is all aluminum construction with a durable powder coat finish inside and out**



Toys R Us Flagship Store
New York, NY

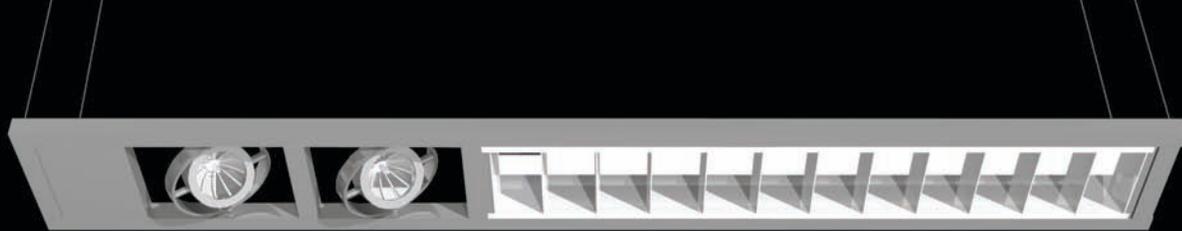


CS11675 G BX40 S 120 (Shown with Parabolic Louver)

COMBO CLASSIC SUSPENDED LOW VOLTAGE MR16

- A grid style adjustable fixture that is horizontally suspended.
- Combines the use of Low Voltage MR16 lamps with a choice of fluorescent lamp sources in many fixture configuration styles.

FIXTURE CONFIGURATIONS

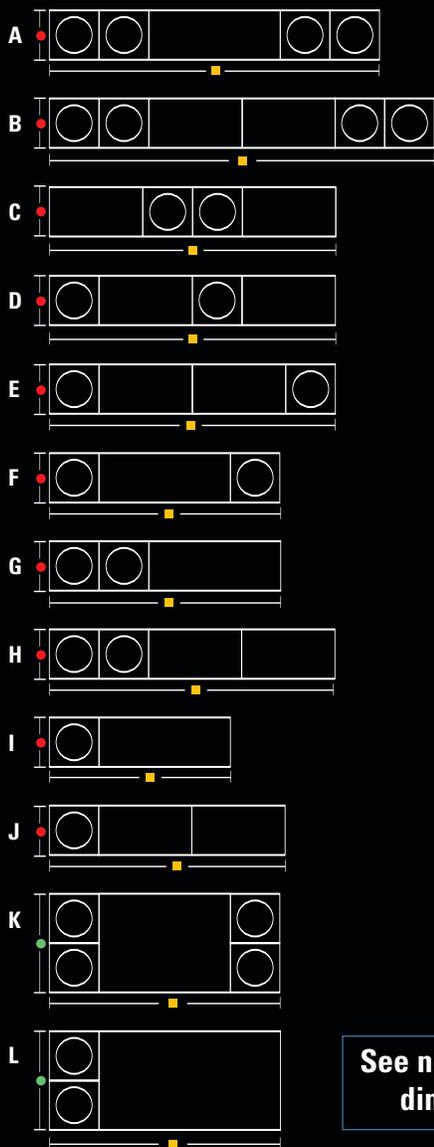

See next page for
dimensions



3.70"

SIDE




ORDERING

1																											
FIXTURE	<table border="1"> <thead> <tr> <th>Item #</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>CS11650</td> <td>Combo Classic Suspended MR16 12 volt 50 watts</td> </tr> <tr> <td>CS11675</td> <td>Combo Classic Suspended MR16 12 volt 75 watts</td> </tr> </tbody> </table>	Item #	Description	CS11650	Combo Classic Suspended MR16 12 volt 50 watts	CS11675	Combo Classic Suspended MR16 12 volt 75 watts																				
	Item #	Description																									
CS11650	Combo Classic Suspended MR16 12 volt 50 watts																										
CS11675	Combo Classic Suspended MR16 12 volt 75 watts																										
2																											
FIXTURE CONFIGURATION	<table border="1"> <thead> <tr> <th>Item #</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>4 Light MR16 with 1 Center Fluor. Cell</td> </tr> <tr> <td>B</td> <td>4 Light MR16 with 2 Center Fluor. Cells</td> </tr> <tr> <td>C</td> <td>2 Light MR16 with 2 Outer Fluor. Cells</td> </tr> <tr> <td>D</td> <td>2 Light MR16 with 2 Alternate Fluor. Cells</td> </tr> <tr> <td>E</td> <td>2 Light MR16 with 2 Center Fluor. Cells</td> </tr> <tr> <td>F</td> <td>2 Light MR16 with 1 Center Fluor. Cell</td> </tr> <tr> <td>G</td> <td>2 Light MR16 with 1 Fluor. Cell</td> </tr> <tr> <td>H</td> <td>2 Light MR16 with 2 Fluor. Cells</td> </tr> <tr> <td>I</td> <td>1 Light MR16 with 1 Fluor. Cell</td> </tr> <tr> <td>J</td> <td>1 Light MR16 with 2 Fluor. Cells</td> </tr> <tr> <td>K</td> <td>4 Light MR16 Double Wide with 2 Fluor. Cells</td> </tr> <tr> <td>L</td> <td>2 Light MR16 Double Wide with 2 Fluor. Cells</td> </tr> </tbody> </table>	Item #	Description	A	4 Light MR16 with 1 Center Fluor. Cell	B	4 Light MR16 with 2 Center Fluor. Cells	C	2 Light MR16 with 2 Outer Fluor. Cells	D	2 Light MR16 with 2 Alternate Fluor. Cells	E	2 Light MR16 with 2 Center Fluor. Cells	F	2 Light MR16 with 1 Center Fluor. Cell	G	2 Light MR16 with 1 Fluor. Cell	H	2 Light MR16 with 2 Fluor. Cells	I	1 Light MR16 with 1 Fluor. Cell	J	1 Light MR16 with 2 Fluor. Cells	K	4 Light MR16 Double Wide with 2 Fluor. Cells	L	2 Light MR16 Double Wide with 2 Fluor. Cells
	Item #	Description																									
	A	4 Light MR16 with 1 Center Fluor. Cell																									
	B	4 Light MR16 with 2 Center Fluor. Cells																									
	C	2 Light MR16 with 2 Outer Fluor. Cells																									
	D	2 Light MR16 with 2 Alternate Fluor. Cells																									
	E	2 Light MR16 with 2 Center Fluor. Cells																									
	F	2 Light MR16 with 1 Center Fluor. Cell																									
	G	2 Light MR16 with 1 Fluor. Cell																									
	H	2 Light MR16 with 2 Fluor. Cells																									
	I	1 Light MR16 with 1 Fluor. Cell																									
	J	1 Light MR16 with 2 Fluor. Cells																									
K	4 Light MR16 Double Wide with 2 Fluor. Cells																										
L	2 Light MR16 Double Wide with 2 Fluor. Cells																										
3																											
FLUORESCENT CELL	<table border="1"> <thead> <tr> <th>Item #</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>BX40</td> <td>40 watt BIAX®</td> </tr> <tr> <td>BX50</td> <td>50 watt BIAX®</td> </tr> <tr> <td>PLL80</td> <td>80 watt PL-L</td> </tr> <tr> <td>PLT26</td> <td>26 watt PL-T</td> </tr> <tr> <td>PLT32</td> <td>32 watt PL-T</td> </tr> <tr> <td>PLT42</td> <td>42 watt PL-T</td> </tr> <tr> <td>T528</td> <td>28 watt T5</td> </tr> <tr> <td>T535</td> <td>35 watt T5</td> </tr> <tr> <td>T5H039</td> <td>39 watt T5HO</td> </tr> <tr> <td>T5H054</td> <td>54 watt T5HO</td> </tr> </tbody> </table>	Item #	Description	BX40	40 watt BIAX®	BX50	50 watt BIAX®	PLL80	80 watt PL-L	PLT26	26 watt PL-T	PLT32	32 watt PL-T	PLT42	42 watt PL-T	T528	28 watt T5	T535	35 watt T5	T5H039	39 watt T5HO	T5H054	54 watt T5HO				
	Item #	Description																									
	BX40	40 watt BIAX®																									
	BX50	50 watt BIAX®																									
	PLL80	80 watt PL-L																									
	PLT26	26 watt PL-T																									
	PLT32	32 watt PL-T																									
	PLT42	42 watt PL-T																									
	T528	28 watt T5																									
T535	35 watt T5																										
T5H039	39 watt T5HO																										
T5H054	54 watt T5HO																										
4																											
FINISH	<table border="1"> <thead> <tr> <th>Item #</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>BK</td> <td>Black</td> </tr> <tr> <td>WH</td> <td>White</td> </tr> <tr> <td>S</td> <td>Industrial Silver</td> </tr> <tr> <td>PC</td> <td>Polished Chrome</td> </tr> <tr> <td>PT</td> <td>Custom (Specify)</td> </tr> </tbody> </table>	Item #	Description	BK	Black	WH	White	S	Industrial Silver	PC	Polished Chrome	PT	Custom (Specify)														
	Item #	Description																									
	BK	Black																									
	WH	White																									
	S	Industrial Silver																									
PC	Polished Chrome																										
PT	Custom (Specify)																										
5																											
VOLTAGE	<table border="1"> <thead> <tr> <th>Item #</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>120</td> <td>120 Volts</td> </tr> <tr> <td>277</td> <td>277 Volts</td> </tr> </tbody> </table>	Item #	Description	120	120 Volts	277	277 Volts																				
	Item #	Description																									
120	120 Volts																										
277	277 Volts																										

Ordering Example

FIXTURE TYPE	FIXTURE CONFIGURATION	FLUORESCENT CELL	FINISH	VOLTAGE
CS11675	G	BX40	S	120

Combo Classic Suspended, Two light 75 Watt MR16 with One 40 Watt BIAX® Cell, Industrial Silver Finish, 120 volts

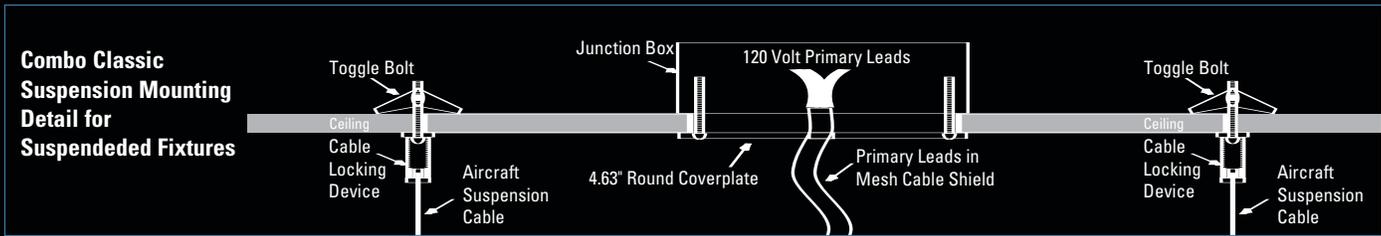

COMBO CLASSIC MR16 SUSPENDED FIXTURE CONFIGURATION DIMENSIONS

MR16 Fixture Configuration		BX40	BX50	PLL80	PLT26	PLT32	PLT42	T528	T535	T5HO39	T5HO54
A 4 Light MR16 with 1 Center Fluor. Cell	●	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"
	■	47.60"	47.60"	47.60"	30.10"	30.60"	31.60"	71.10"	83.10"	59.10"	71.10"
B 4 Light MR16 with 2 Center Fluor. Cells	●	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"
	■	73.85"	73.85"	79.85"	38.85"	39.85"	41.85"	120.85"	144.85"	96.85"	120.85"
C 2 Light MR16 with 2 Outer Fluor. Cells	●	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"
	■	63.55"	63.55"	63.55"	28.55"	29.55"	31.55"	110.55"	134.55"	86.55"	110.55"
D 2 Light MR16 with 2 Alternate Fluor. Cells	●	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"
	■	63.55"	63.55"	63.55"	28.55"	29.55"	31.55"	110.55"	134.55"	86.55"	110.55"
E 2 Light MR16 with 2 Center Fluor. Cells	●	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"
	■	63.55"	63.55"	63.55"	28.55"	29.55"	31.55"	110.55"	134.55"	86.55"	110.55"
F 2 Light MR16 with 1 Center Fluor. Cell	●	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"
	■	37.30"	37.30"	37.30"	19.80"	20.30"	21.30"	60.80"	72.80"	48.80"	60.80"
G 2 Light MR16 with 1 Fluor. Cell	●	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"
	■	37.30"	37.30"	37.30"	19.80"	20.30"	21.30"	60.80"	72.80"	48.80"	60.80"
H 2 Light MR16 with 2 Fluor. Cells	●	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"
	■	63.55"	63.55"	63.55"	28.55"	29.55"	31.55"	110.55"	134.55"	86.55"	110.55"
I 1 Light MR16 with 1 Fluor. Cell	●	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"
	■	32.15"	32.15"	32.15"	14.65"	15.15"	16.15"	55.65"	67.65"	43.65"	55.65"
J 1 Light MR16 with 2 Fluor. Cells	●	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"
	■	58.40"	58.40"	58.40"	23.40"	24.40"	26.40"	105.40"	129.40"	81.40"	105.40"
K 4 Light MR16 Double Wide with 2 Fluor. Cells	●	11.05"	11.05"	11.05"	11.05"	11.05"	11.05"	11.05"	11.05"	11.05"	11.05"
	■	37.30"	37.30"	37.30"	19.80"	20.30"	21.30"	60.80"	72.80"	48.80"	60.80"
L 2 Light MR16 Double Wide with 2 Fluor. Cells	●	11.05"	11.05"	11.05"	11.05"	11.05"	11.05"	11.05"	11.05"	11.05"	11.05"
	■	32.15"	32.15"	32.15"	14.65"	15.15"	16.15"	55.65"	67.65"	43.65"	55.65"

- Solid aluminum construction.
- Double gimbal lamp holders provide 90° x 90° adjustability.
- Integral low voltage electronic transformer with fuse and short circuit protection

- Fluorescent cells available with a wide array of accessories such as high transmission overlays and parabolic louvers (see page 172)
- Custom configurations are available (Consult RSA Customer Service)
- Also available in Recessed Configurations (see page 128- 149)

Optional Accessories - See page 216 for details.

For fluorescent accessories see page 172.

Baffle	Snoots	Louvers	Lenses	Parabolic Louvers	Diffusers




CS17020 A BX40 S 120 (Shown with parabolic louver)

COMBO CLASSIC SUSPENDED LOW VOLTAGE AR70

- A grid style adjustable fixture that is horizontally suspended.
- Combines the use of Low Voltage AR70 lamps with a choice of fluorescent lamp sources in many fixture configuration styles.

FIXTURE CONFIGURATIONS

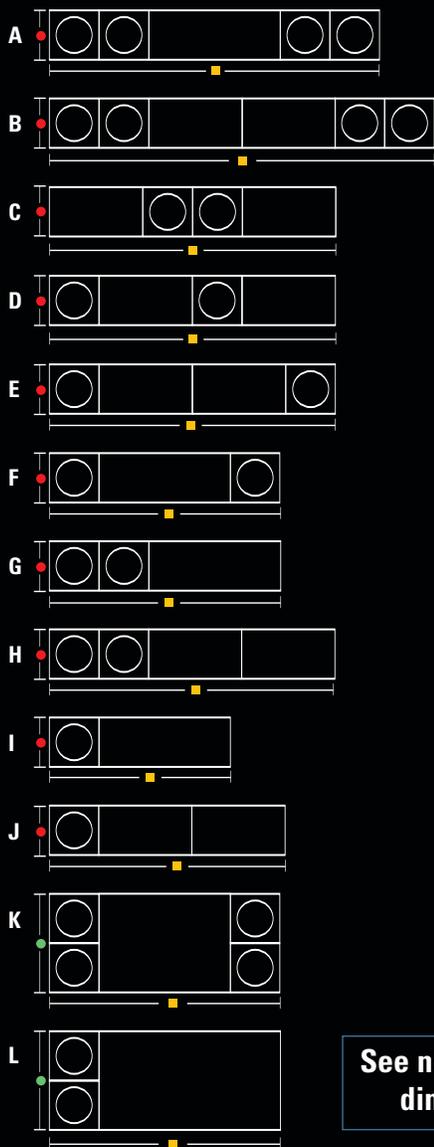

See next page for
dimensions



ORDERING

	Item #	Description
1 FIXTURE	CS17020	Combo Classic Suspended AR70 12 volt 20 watts
	CS17050	Combo Classic Suspended AR70 12 volt 50 watts

	Item #	Description
2 FIXTURE CONFIGURATION	A	4 Light AR70 with 1 Center Fluor. Cell
	B	4 Light AR70 with 2 Center Fluor. Cells
	C	2 Light AR70 with 2 Outer Fluor. Cells
	D	2 Light AR70 with 2 Alternate Fluor. Cells
	E	2 Light AR70 with 2 Center Fluor. Cells
	F	2 Light AR70 with 1 Center Fluor. Cell
	G	2 Light AR70 with 1 Fluor. Cell
	H	2 Light AR70 with 2 Fluor. Cells
	I	1 Light AR70 with 1 Fluor. Cell
	J	1 Light AR70 with 2 Fluor. Cells
	K	4 Light AR70 Double Wide with 2 Fluor. Cells
	L	2 Light AR70 Double Wide with 2 Fluor. Cells

	Item #	Description
3 FLUORESCENT CELL	BX40	40 watt BIAX®
	BX50	50 watt BIAX®
	PLL80	80 watt PL-L
	PLT26	26 watt PL-T
	PLT32	32 watt PL-T
	PLT42	42 watt PL-T
	T528	28 watt T5
	T535	35 watt T5
	T5H039	39 watt T5HO
T5H054	54 watt T5HO	


	Item #	Description
4 FINISH	BK	Black
	WH	White
	S	Industrial Silver
	PC	Polished Chrome
	PT	Custom (Specify)

	Item #	Description
5 VOLTAGE	120	120 Volts
	277	277 Volts

Ordering Example

FIXTURE TYPE	FIXTURE CONFIGURATION	FLUORESCENT CELL	FINISH	VOLTAGE
CS17020	A	BX40	S	120

Combo Classic Suspended, Four light 20 Watt AR70 with One 50 Watt BIAX® Cell, Industrial Silver Finish, 120 volts

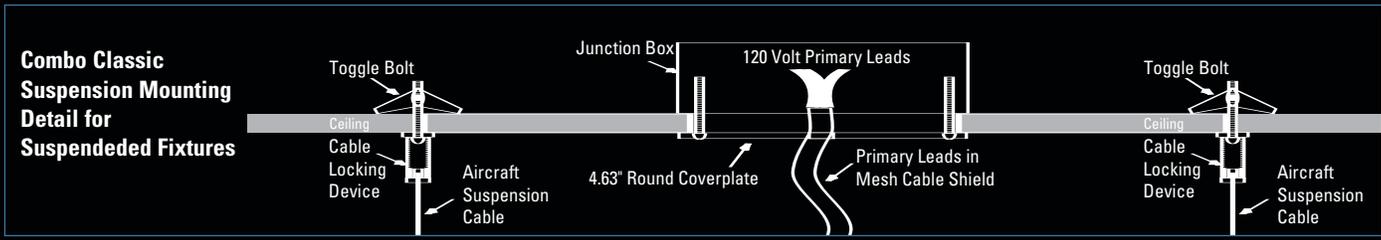

COMBO CLASSIC AR70 SUSPENDED FIXTURE CONFIGURATION DIMENSIONS

AR70 Fixture Configuration		BX40	BX50	PLL80	PLT26	PLT32	PLT42	T528	T535	T5HO39	T5HO54
A 4 Light AR70 with 1 Center Fluor. Cell	●	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"
	■	47.60"	47.60"	47.60"	30.10"	30.60"	31.60"	71.10"	83.10"	59.10"	71.10"
B 4 Light AR70 with 2 Center Fluor. Cells	●	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"
	■	73.85"	73.85"	79.85"	38.85"	39.85"	41.85"	120.85"	144.85"	96.85"	120.85"
C 2 Light AR70 with 2 Outer Fluor. Cells	●	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"
	■	63.55"	63.55"	63.55"	28.55"	29.55"	31.55"	110.55"	134.55"	86.55"	110.55"
D 2 Light AR70 with 2 Alternate Fluor. Cells	●	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"
	■	63.55"	63.55"	63.55"	28.55"	29.55"	31.55"	110.55"	134.55"	86.55"	110.55"
E 2 Light AR70 with 2 Center Fluor. Cells	●	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"
	■	63.55"	63.55"	63.55"	28.55"	29.55"	31.55"	110.55"	134.55"	86.55"	110.55"
F 2 Light AR70 with 1 Center Fluor. Cell	●	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"
	■	37.30"	37.30"	37.30"	19.80"	20.30"	21.30"	60.80"	72.80"	48.80"	60.80"
G 2 Light AR70 with 1 Fluor. Cell	●	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"
	■	37.30"	37.30"	37.30"	19.80"	20.30"	21.30"	60.80"	72.80"	48.80"	60.80"
H 2 Light AR70 with 2 Fluor. Cells	●	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"
	■	63.55"	63.55"	63.55"	28.55"	29.55"	31.55"	110.55"	134.55"	86.55"	110.55"
I 1 Light AR70 with 1 Fluor. Cell	●	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"
	■	32.15"	32.15"	32.15"	14.65"	15.15"	16.15"	55.65"	67.65"	43.65"	55.65"
J 1 Light AR70 with 2 Fluor. Cells	●	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"	5.90"
	■	58.40"	58.40"	58.40"	23.40"	24.40"	26.40"	105.40"	129.40"	81.40"	105.40"
K 4 Light AR70 Double Wide with 2 Fluor. Cells	●	11.05"	11.05"	11.05"	11.05"	11.05"	11.05"	11.05"	11.05"	11.05"	11.05"
	■	37.30"	37.30"	37.30"	19.80"	20.30"	21.30"	60.80"	72.80"	48.80"	60.80"
L 2 Light AR70 Double Wide with 2 Fluor. Cells	●	11.05"	11.05"	11.05"	11.05"	11.05"	11.05"	11.05"	11.05"	11.05"	11.05"
	■	32.15"	32.15"	32.15"	14.65"	15.15"	16.15"	55.65"	67.65"	43.65"	55.65"

- Solid aluminum construction.
- Double gimbal lamp holders provide 90° x 90° adjustability.
- Integral low voltage electronic transformer with fuse and short circuit protection

- Fluorescent cells available with a wide array of accessories such as high transmission overlays and parabolic louvers (see page 172)
- Custom configurations are available (Consult RSA Customer Service)
- Also available in Recessed Configurations (see page 128- 149)

Optional Accessories - See page 216 for details.

For fluorescent accessories see page 172.

Baffle	Snoots	Louvers	Lenses	Parabolic Louvers	Diffusers




CS211175 A BX50 S 120 (Shown with parabolic louver)

COMBO CLASSIC SUSPENDED LOW VOLTAGE AR111

- A grid style adjustable fixture that is horizontally suspended.
- Combines the use of Low Voltage AR111 lamps with a choice of fluorescent lamp sources in many fixture configuration styles.

FIXTURE CONFIGURATIONS

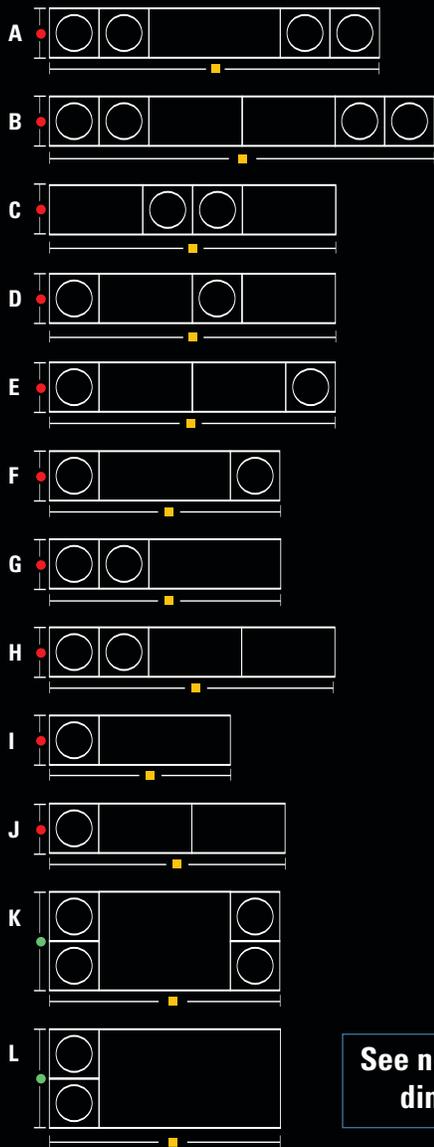

See next page for
dimensions



ORDERING

Item #	Description
CS211135	Combo Classic Suspended AR111 12 volt 35 watts
CS211150	Combo Classic Suspended AR111 12 volt 50 watts
CS211175	Combo Classic Suspended AR111 12 volt 75 watts
CS2111100	Combo Classic Suspended AR111 12 volt 100 watts

Item #	Description
A	4 Light AR111 with 1 Center Fluor. Cell
B	4 Light AR111 with 2 Center Fluor. Cells
C	2 Light AR111 with 2 Outer Fluor. Cells
D	2 Light AR111 with 2 Alternate Fluor. Cells
E	2 Light AR111 with 2 Center Fluor. Cells
F	2 Light AR111 with 1 Center Fluor. Cell
G	2 Light AR111 with 1 Fluor. Cell
H	2 Light AR111 with 2 Fluor. Cells
I	1 Light AR111 with 1 Fluor. Cell
J	1 Light AR111 with 2 Fluor. Cells
K	4 Light AR111 Double Wide with 2 Fluor. Cells
L	2 Light AR111 Double Wide with 2 Fluor. Cells

Item #	Description
BX40	40 watt BIAX®
BX50	50 watt BIAX®
PLL80	80 watt PL-L
PLT26	26 watt PL-T
PLT32	32 watt PL-T
PLT42	42 watt PL-T
T528	28 watt T5
T535	35 watt T5
T5H039	39 watt T5HO
T5H054	54 watt T5HO


Item #	Description
BK	Black
WH	White
S	Industrial Silver
PC	Polished Chrome
PT	Custom (Specify)

Item #	Description
120	120 Volts
277	277 Volts

Ordering Example

FIXTURE TYPE	FIXTURE CONFIGURATION	FLUORESCENT CELL	FINISH	VOLTAGE
CS211175	A	BX50	S	120

Combo Classic Suspended, Four light 75 Watt AR111 with One 50 Watt BIAX® Cell, Industrial Silver Finish, 120 volts

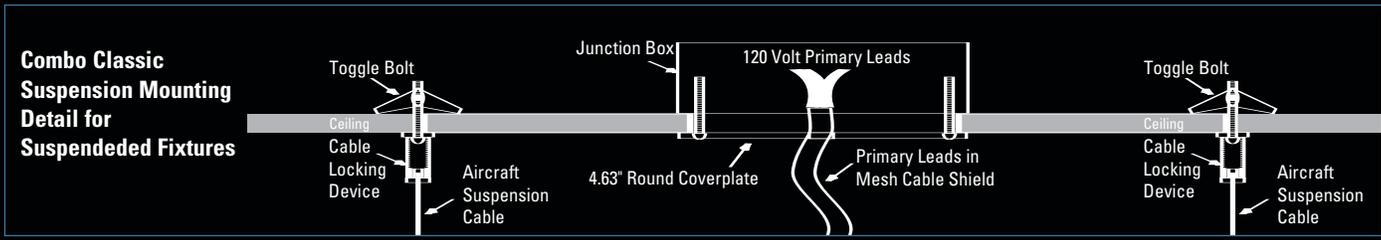

COMBO CLASSIC AR111 SUSPENDED FIXTURE CONFIGURATION DIMENSIONS

AR111 Fixture Configuration		BX40	BX50	PLL80	PLT26	PLT32	PLT42	T528	T535	T5HO39	T5HO54
A 4 Light AR111 with 1 Center Fluor. Cell	●	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"
	■	53.60"	53.60"	53.60"	36.10"	36.60"	37.60"	77.10"	89.10"	65.10"	77.10"
B 4 Light AR111 with 2 Center Fluor. Cells	●	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"
	■	79.85"	79.85"	79.85"	44.85"	45.85"	47.85"	126.85"	150.85"	102.85"	126.85"
C 2 Light AR111 with 2 Outer Fluor. Cells	●	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"
	■	66.55"	66.55"	66.55"	31.55"	32.55"	34.55"	113.55"	137.55"	89.55"	113.55"
D 2 Light AR111 with 2 Alternate Fluor. Cells	●	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"
	■	66.55"	66.55"	66.55"	31.55"	32.55"	34.55"	113.55"	137.55"	89.55"	113.55"
E 2 Light AR111 with 2 Center Fluor. Cells	●	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"
	■	66.55"	66.55"	66.55"	31.55"	32.55"	34.55"	113.55"	137.55"	89.55"	113.55"
F 2 Light AR111 with 1 Center Fluor. Cell	●	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"
	■	40.30"	40.30"	40.30"	22.80"	23.30"	24.30"	63.80"	75.80"	51.80"	63.80"
G 2 Light AR111 with 1 Fluor. Cell	●	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"
	■	40.30"	40.30"	40.30"	22.80"	23.30"	24.30"	63.80"	75.80"	51.80"	63.80"
H 2 Light AR111 with 2 Fluor. Cells	●	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"
	■	66.55"	66.55"	66.55"	31.55"	32.55"	34.55"	113.55"	137.55"	89.55"	113.55"
I 1 Light AR111 with 1 Fluor. Cell	●	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"
	■	33.65"	33.65"	33.65"	16.15"	16.65"	17.65"	57.15"	69.15"	45.15"	57.15"
J 1 Light AR111 with 2 Fluor. Cells	●	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"
	■	59.90"	59.90"	59.90"	24.90"	25.90"	27.90"	106.90"	130.90"	82.90"	106.90"
K 4 Light AR111 Double Wide with 2 Fluor. Cells	●	14.05"	14.05"	14.05"	14.05"	14.05"	14.05"	14.05"	14.05"	14.05"	14.05"
	■	40.30"	40.30"	40.30"	22.80"	23.30"	24.30"	63.80"	75.80"	51.80"	63.80"
L 2 Light AR111 Double Wide with 2 Fluor. Cells	●	14.05"	14.05"	14.05"	14.05"	14.05"	14.05"	14.05"	14.05"	14.05"	14.05"
	■	33.65"	33.65"	33.65"	16.15"	16.65"	17.65"	57.15"	69.15"	45.15"	57.15"

- Solid aluminum construction.
- Double gimbal lamp holders provide 90° x 90° adjustability.
- Integral low voltage electronic transformer with fuse and short circuit protection

- Fluorescent cells available with a wide array of accessories such as high transmission overlays and parabolic louvers (see page 172)
- Custom configurations are available (Consult RSA Customer Service)
- Also available in Recessed Configurations (see page 128- 149)

Optional Accessories - See page 216 for details.

For fluorescent accessories see page 172.

Baffle	Snoots	Louvers	Lenses	Parabolic Louvers	Diffusers




CS220 F BX50 S (Shown with parabolic louver)

COMBO CLASSIC SUSPENDED LINE VOLTAGE PAR20

- A grid style adjustable fixture that is horizontally suspended.
- Combines the use of Line Voltage PAR20 lamps with a choice of fluorescent lamp sources in many fixture configuration styles.

FIXTURE CONFIGURATIONS

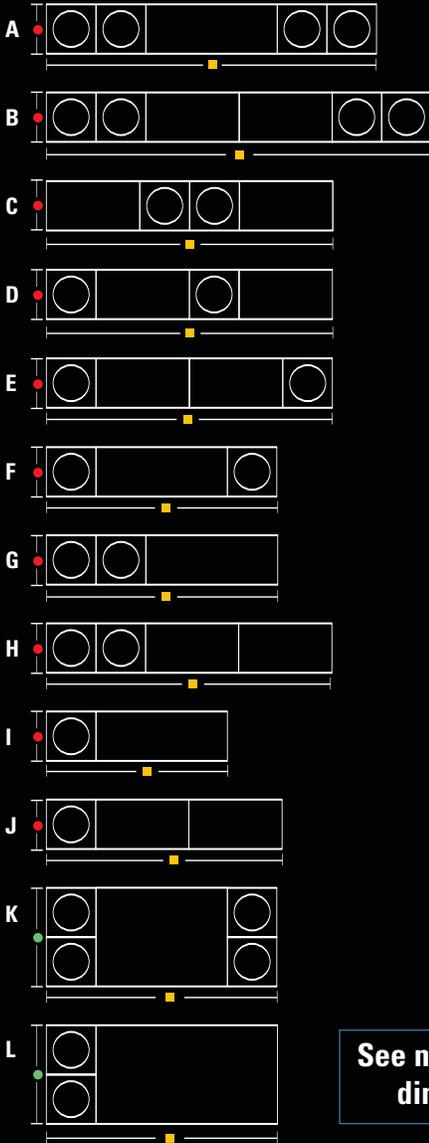

ORDERING

Item #	Description
CS220	Combo Classic Suspended PAR20 120 volts

Item #	Description
A	4 Light PAR20 with 1 Center Fluor. Cell
B	4 Light PAR20 with 2 Center Fluor. Cells
C	2 Light PAR20 with 2 Outer Fluor. Cells
D	2 Light PAR20 with 2 Alternate Fluor. Cells
E	2 Light PAR20 with 2 Center Fluor. Cells
F	2 Light PAR20 with 1 Center Fluor. Cell
G	2 Light PAR20 with 1 Fluor. Cell
H	2 Light PAR20 with 2 Fluor. Cells
I	1 Light PAR20 with 1 Fluor. Cell
J	1 Light PAR20 with 2 Fluor. Cells
K	4 Light PAR20 Double Wide with 2 Fluor. Cells
L	2 Light PAR20 Double Wide with 2 Fluor. Cells


Item #	Description
BX40	40 watt BIAX®
BX50	50 watt BIAX®
PLL80	80 watt PL-L
PLT26	26 watt PL-T
PLT32	32 watt PL-T
PLT42	42 watt PL-T
T528	28 watt T5
T535	35 watt T5
T5H039	39 watt T5HO
T5H054	54 watt T5HO

Item #	Description
BK	Black
WH	White
S	Industrial Silver
PC	Polished Chrome
PT	Custom (Specify)

Ordering Example

FIXTURE TYPE	FIXTURE CONFIGURATION	FLUORESCENT CELL	FINISH
CS220	F	BX50	S

Combo Classic Suspended, Two light 120 volt PAR20 with One 50 Watt BIAX® Cell, Industrial Silver Finish

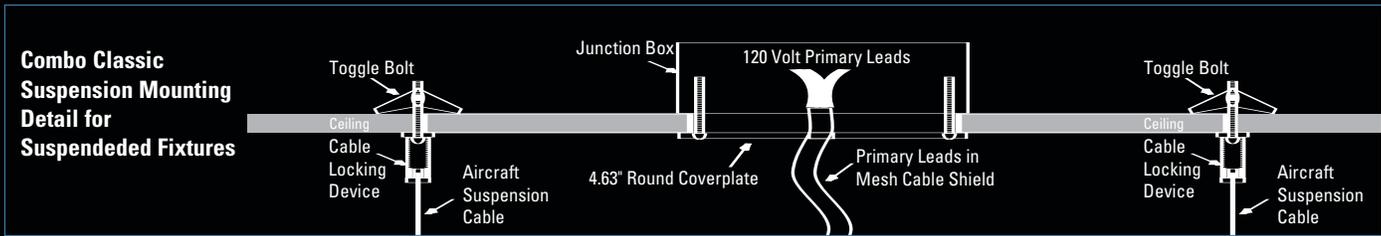

COMBO CLASSIC PAR20 SUSPENDED FIXTURE CONFIGURATION DIMEN-

PAR20 Fixture Configuration		BX40	BX50	PLL80	PLT26	PLT32	PLT42	T528	T535	T5HO39	T5HO54
A 4 Light PAR20 with 1 Center Fluor. Cell	●	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"
	■	53.60"	53.60"	53.60"	36.10"	36.60"	37.60"	77.10"	89.10"	65.10"	77.10"
B 4 Light PAR20 with 2 Center Fluor. Cells	●	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"
	■	79.85"	79.85"	79.85"	44.85"	45.85"	47.85"	126.85"	150.85"	102.85"	126.85"
C 2 Light PAR20 with 2 Outer Fluor. Cells	●	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"
	■	66.55"	66.55"	66.55"	31.55"	32.55"	34.55"	113.55"	137.55"	89.55"	113.55"
D 2 Light PAR20 with 2 Alternate Fluor. Cells	●	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"
	■	66.55"	66.55"	66.55"	31.55"	32.55"	34.55"	113.55"	137.55"	89.55"	113.55"
E 2 Light PAR20 with 2 Center Fluor. Cells	●	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"
	■	66.55"	66.55"	66.55"	31.55"	32.55"	34.55"	113.55"	137.55"	89.55"	113.55"
F 2 Light PAR20 with 1 Center Fluor. Cell	●	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"
	■	40.30"	40.30"	40.30"	22.80"	23.30"	24.30"	63.80"	75.80"	51.80"	63.80"
G 2 Light PAR20 with 1 Fluor. Cell	●	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"
	■	40.30"	40.30"	40.30"	22.80"	23.30"	24.30"	63.80"	75.80"	51.80"	63.80"
H 2 Light PAR20 with 2 Fluor. Cells	●	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"
	■	66.55"	66.55"	66.55"	31.55"	32.55"	34.55"	113.55"	137.55"	89.55"	113.55"
I 1 Light PAR20 with 1 Fluor. Cell	●	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"
	■	33.65"	33.65"	33.65"	16.15"	16.65"	17.65"	57.15"	69.15"	45.15"	57.15"
J 1 Light PAR20 with 2 Fluor. Cells	●	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"
	■	59.90"	59.90"	59.90"	24.90"	25.90"	27.90"	106.90"	130.90"	82.90"	106.90"
K 4 Light PAR20 Double Wide with 2 Fluor. Cells	●	14.05"	14.05"	14.05"	14.05"	14.05"	14.05"	14.05"	14.05"	14.05"	14.05"
	■	40.30"	40.30"	40.30"	22.80"	23.30"	24.30"	63.80"	75.80"	51.80"	63.80"
L 2 Light PAR20 Double Wide with 2 Fluor. Cells	●	14.05"	14.05"	14.05"	14.05"	14.05"	14.05"	14.05"	14.05"	14.05"	14.05"
	■	33.65"	33.65"	33.65"	16.15"	16.65"	17.65"	57.15"	69.15"	45.15"	57.15"

- Solid aluminum construction.
- Double gimbal lamp holders provide 90° x 90° adjustability.
- Fluorescent cells available with a wide array of accessories such as high transmission overlays and parabolic louvers (see page 172)
- Custom configurations are available (Consult RSA Customer Service)
- Also available in Recessed Configurations (see page 128- 149)

Optional Accessories - See page 216 for details.				For fluorescent accessories see page 172.	
Baffle	Snoots	Louvers	Lenses	Parabolic Louvers	Diffusers




CS330 J BX50 S (Shown with parabolic louver)

COMBO CLASSIC SUSPENDED LINE VOLTAGE PAR30

- A grid style adjustable fixture that is horizontally suspended.
- Combines the use of Line Voltage PAR30 lamps with a choice of fluorescent lamp sources in many fixture configuration styles.

FIXTURE CONFIGURATIONS

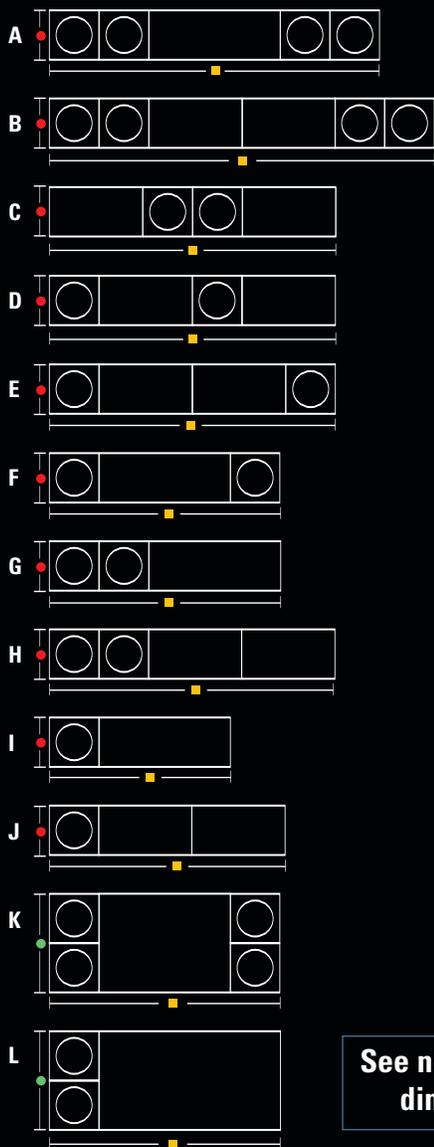

See next page for
dimensions



ORDERING

Item #	Description
CS330	Combo Classic Suspended PAR30 120 volts

Item #	Description
A	4 Light PAR30 with 1 Center Fluor. Cell
B	4 Light PAR30 with 2 Center Fluor. Cells
C	2 Light PAR30 with 2 Outer Fluor. Cells
D	2 Light PAR30 with 2 Alternate Fluor. Cells
E	2 Light PAR30 with 1 Center Fluor. Cells
F	2 Light PAR30 with 1 Fluor. Cell
H	2 Light PAR30 with 2 Fluor. Cells
I	1 Light PAR30 with 1 Fluor. Cell
J	1 Light PAR30 with 2 Fluor. Cells
K	4 Light PAR30 Double Wide with 2 Fluor. Cells
L	2 Light PAR30 Double Wide with 2 Fluor. Cells


Item #	Description
BX40	40 watt BIAX®
BX50	50 watt BIAX®
PLL80	80 watt PL-L
PLT26	26 watt PL-T
PLT32	32 watt PL-T
PLT42	42 watt PL-T
T528	28 watt T5
T535	35 watt T5
T5H039	39 watt T5HO
T5H054	54 watt T5HO

Item #	Description
BK	Black
WH	White
S	Industrial Silver
PC	Polished Chrome
PT	Custom (Specify)

Ordering Example

FIXTURE TYPE	FIXTURE CONFIGURATION	FLUORESCENT CELL	FINISH
CS330	J	BX50	S

Combo Classic Suspended, One light 120 volt PAR30 with Two 50 Watt BIAX® Cells, Industrial Silver Finish

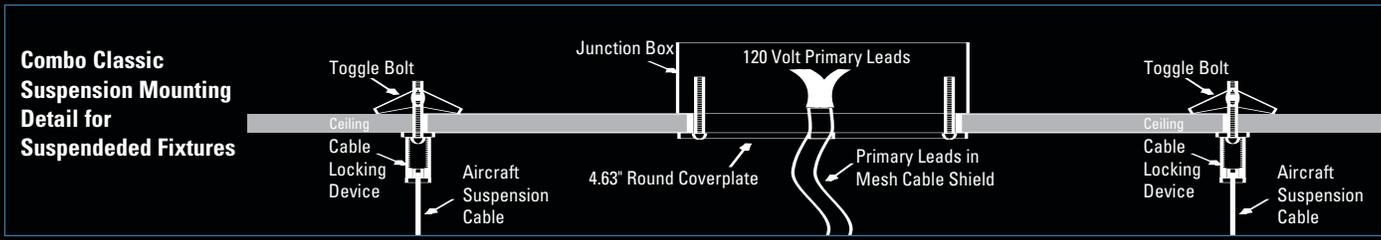

COMBO CLASSIC PAR30 SUSPENDED FIXTURE CONFIGURATION DIMENSIONS

PAR30 Fixture Configuration		BX40	BX50	PLL80	PLT26	PLT32	PLT42	T528	T535	T5HO39	T5HO54
A 4 Light PAR30 with 1 Center Fluor. Cell	●	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"
	■	53.60"	53.60"	53.60"	36.10"	36.60"	37.60"	77.10"	89.10"	65.10"	77.10"
B 4 Light PAR30 with 2 Center Fluor. Cells	●	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"
	■	79.85"	79.85"	79.85"	44.85"	45.85"	47.85"	126.85"	150.85"	102.85"	126.85"
C 2 Light PAR30 with 2 Outer Fluor. Cells	●	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"
	■	66.55"	66.55"	66.55"	31.55"	32.55"	34.55"	113.55"	137.55"	89.55"	113.55"
D 2 Light PAR30 with 2 Alternate Fluor. Cells	●	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"
	■	66.55"	66.55"	66.55"	31.55"	32.55"	34.55"	113.55"	137.55"	89.55"	113.55"
E 2 Light PAR30 with 2 Center Fluor. Cells	●	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"
	■	66.55"	66.55"	66.55"	31.55"	32.55"	34.55"	113.55"	137.55"	89.55"	113.55"
F 2 Light PAR30 with 1 Center Fluor. Cell	●	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"
	■	40.30"	40.30"	40.30"	22.80"	23.30"	24.30"	63.80"	75.80"	51.80"	63.80"
G 2 Light PAR30 with 1 Fluor. Cell	●	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"
	■	40.30"	40.30"	40.30"	22.80"	23.30"	24.30"	63.80"	75.80"	51.80"	63.80"
H 2 Light PAR30 with 2 Fluor. Cells	●	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"
	■	66.55"	66.55"	66.55"	31.55"	32.55"	34.55"	113.55"	137.55"	89.55"	113.55"
I 1 Light PAR30 with 1 Fluor. Cell	●	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"
	■	33.65"	33.65"	33.65"	16.15"	16.65"	17.65"	57.15"	69.15"	45.15"	57.15"
J 1 Light PAR30 with 2 Fluor. Cells	●	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"
	■	59.90"	59.90"	59.90"	24.90"	25.90"	27.90"	106.90"	130.90"	82.90"	106.90"
K 4 Light PAR30 Double Wide with 2 Fluor. Cells	●	14.05"	14.05"	14.05"	14.05"	14.05"	14.05"	14.05"	14.05"	14.05"	14.05"
	■	40.30"	40.30"	40.30"	22.80"	23.30"	24.30"	63.80"	75.80"	51.80"	63.80"
L 2 Light PAR30 Double Wide with 2 Fluor. Cells	●	14.05"	14.05"	14.05"	14.05"	14.05"	14.05"	14.05"	14.05"	14.05"	14.05"
	■	33.65"	33.65"	33.65"	16.15"	16.65"	17.65"	57.15"	69.15"	45.15"	57.15"

- Solid aluminum construction.
- Double gimbal lamp holders provide 90° x 90° adjustability.
- Fluorescent cells available with a wide array of accessories such as high transmission overlays and parabolic louvers (see page 172)
- Custom configurations are available (Consult RSA Customer Service)
- Also available in Recessed Configurations (see page 128- 149)

Optional Accessories - See page 216 for details.				For fluorescent accessories see page 172.	
Baffle	Snoots	Louvers	Lenses	Parabolic Louvers	Diffusers




CS338 E BX40 S (Shown with parabolic louver)

COMBO CLASSIC SUSPENDED LINE VOLTAGE PAR38

- A grid style adjustable fixture that is horizontally suspended.
- Combines the use of Line Voltage PAR38 lamps with a choice of fluorescent lamp sources in many fixture configuration styles.

FIXTURE CONFIGURATIONS

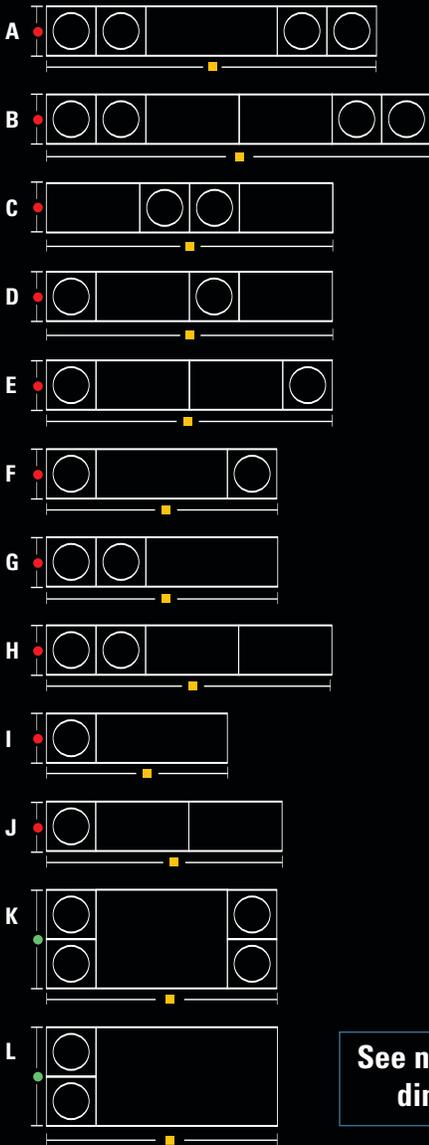

See next page for
dimensions



ORDERING

Item #	Description
CS338	Combo Classic Suspended PAR38 120 volts

Item #	Description
A	4 Light PAR38 with 1 Center Fluor. Cell
B	4 Light PAR38 with 2 Center Fluor. Cells
C	2 Light PAR38 with 2 Outer Fluor. Cells
D	2 Light PAR38 with 2 Alternate Fluor. Cells
E	2 Light PAR38 with 2 Center Fluor. Cells
F	2 Light PAR38 with 1 Center Fluor. Cell
G	2 Light PAR38 with 1 Fluor. Cell
H	2 Light PAR38 with 2 Fluor. Cells
I	1 Light PAR38 with 1 Fluor. Cell
J	1 Light PAR38 with 2 Fluor. Cells
K	4 Light PAR38 Double Wide with 2 Fluor. Cells
L	2 Light PAR38 Double Wide with 2 Fluor. Cells


Item #	Description
BX40	40 watt BIAX®
BX50	50 watt BIAX®
PLL80	80 watt PL-L
PLT26	26 watt PL-T
PLT32	32 watt PL-T
PLT42	42 watt PL-T
T528	28 watt T5
T535	35 watt T5
T5H039	39 watt T5HO
T5H054	54 watt T5HO

Item #	Description
BK	Black
WH	White
S	Industrial Silver
PC	Polished Chrome
PT	Custom (Specify)

Ordering Example

FIXTURE TYPE	FIXTURE CONFIGURATION	FLUORESCENT CELL	FINISH
CS338	E	BX40	S

Combo Classic Suspended, Two light 120 volt PAR38 with Two 40 Watt BIAX® Cells, Industrial Silver Finish

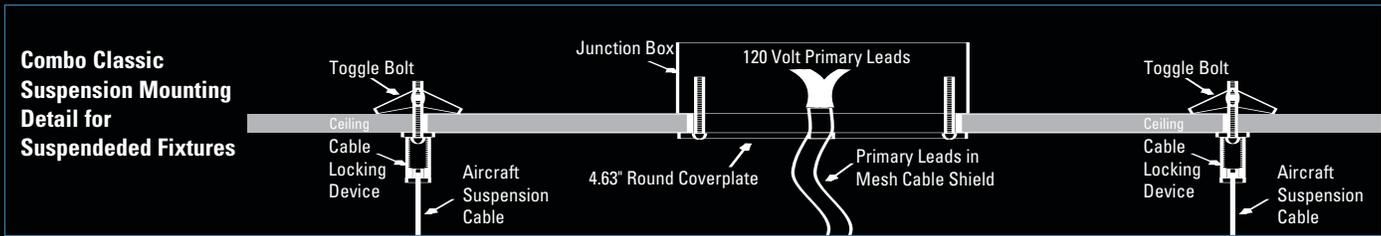


COMBO CLASSIC PAR38 SUSPENDED FIXTURE CONFIGURATION DIMENSIONS

PAR38 Fixture Configuration		BX40	BX50	PLL80	PLT26	PLT32	PLT42	T528	T535	T5HO39	T5HO54
A 4 Light PAR38 with 1 Center Fluor. Cell	●	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"
	■	56.40"	56.40"	56.40"	38.90"	39.40"	40.40"	79.90"	91.90"	67.90"	79.90"
B 4 Light PAR38 with 2 Center Fluor. Cells	●	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"
	■	82.65"	82.65"	82.65"	47.65"	48.65"	50.65"	129.65"	153.65"	105.65"	129.65"
C 2 Light PAR38 with 2 Outer Fluor. Cells	●	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"
	■	67.95"	67.95"	67.95"	32.95"	33.95"	35.95"	114.95"	138.95"	90.95"	114.95"
D 2 Light PAR38 with 2 Alternate Fluor. Cells	●	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"
	■	67.95"	67.95"	67.95"	32.95"	33.95"	35.95"	114.95"	138.95"	90.95"	114.95"
E 2 Light PAR38 with 2 Center Fluor. Cells	●	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"
	■	67.95"	67.95"	67.95"	32.95"	33.95"	35.95"	114.95"	138.95"	90.95"	114.95"
F 2 Light PAR38 with 1 Center Fluor. Cell	●	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"
	■	41.70"	41.70"	41.70"	24.20"	24.70"	25.70"	65.20"	77.20"	53.20"	65.20"
G 2 Light PAR38 with 1 Fluor. Cell	●	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"
	■	41.70"	41.70"	41.70"	24.20"	24.70"	25.70"	65.20"	77.20"	53.20"	65.20"
H 2 Light PAR38 with 2 Fluor. Cells	●	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"
	■	67.95"	67.95"	67.95"	32.95"	33.95"	35.95"	114.95"	138.95"	90.95"	114.95"
I 1 Light PAR38 with 1 Fluor. Cell	●	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"
	■	34.35"	34.35"	34.35"	16.85"	17.35"	18.35"	57.85"	69.85"	45.85"	57.85"
J 1 Light PAR38 with 2 Fluor. Cells	●	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"
	■	60.60"	60.60"	60.60"	25.60"	26.60"	28.60"	107.60"	131.60"	83.60"	107.60"
K 4 Light PAR38 Double Wide with 2 Fluor. Cells	●	15.45"	15.45"	15.45"	15.45"	15.45"	15.45"	15.45"	15.45"	15.45"	15.45"
	■	41.70"	41.70"	41.70"	24.20"	24.70"	25.70"	65.20"	77.20"	53.20"	65.20"
L 2 Light PAR38 Double Wide with 2 Fluor. Cells	●	15.45"	15.45"	15.45"	15.45"	15.45"	15.45"	15.45"	15.45"	15.45"	15.45"
	■	34.35"	34.35"	34.35"	16.85"	17.35"	18.35"	57.85"	69.85"	45.85"	57.85"

- Solid aluminum construction.
- Double gimbal lamp holders provide 90° x 90° adjustability.
- Fluorescent cells available with a wide array of accessories such as high transmission overlays and parabolic louvers (see page 172)
- Custom configurations are available (Consult RSA Customer Service)
- Also available in Recessed Configurations (see page 128- 149)

Optional Accessories - See page 216 for details.				For fluorescent accessories see page 172.	
Baffle	Snoots	Louvers	Lenses	Parabolic Louvers	Diffusers

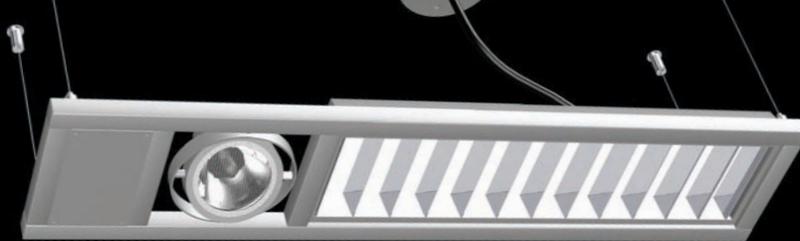


CS220M39 I BX40 S 120 (Shown with parabolic louver)

COMBO CLASSIC SUSPENDED PAR20MH METAL HALIDE

- A grid style adjustable fixture that is horizontally suspended.
- Combines the use of PAR20 Metal Halide lamps with a choice of fluorescent lamp sources in many fixture configuration styles.

FIXTURE CONFIGURATIONS

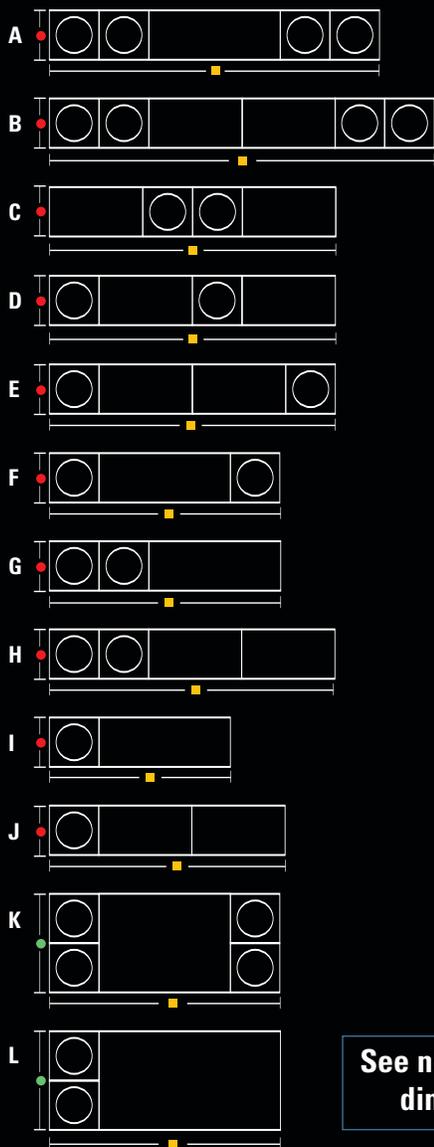

See next page for
dimensions




ORDERING

1	FIXTURE	Item #	Description
		CS220M39	Combo Classic Suspended PAR20MH 39 watts
2	FIXTURE CONFIGURATION	Item #	Description
		A	4 Light PAR20MH with 1 Center Fluor. Cell
3	FLUORESCENT CELL	Item #	Description
		BX40	40 watt BIAX®
4	FINISH	Item #	Description
		BK	Black
5	VOLTAGE	Item #	Description
		120	120 Volts

Ordering Example

FIXTURE TYPE	FIXTURE CONFIGURATION	FLUORESCENT CELL	FINISH	VOLTAGE
CS220M39	I	BX40	S	120

Combo Classic Suspended, One light 39 Watt PAR20MH with One 40 Watt BIAX® Cell, Industrial Silver Finish, 120 volts

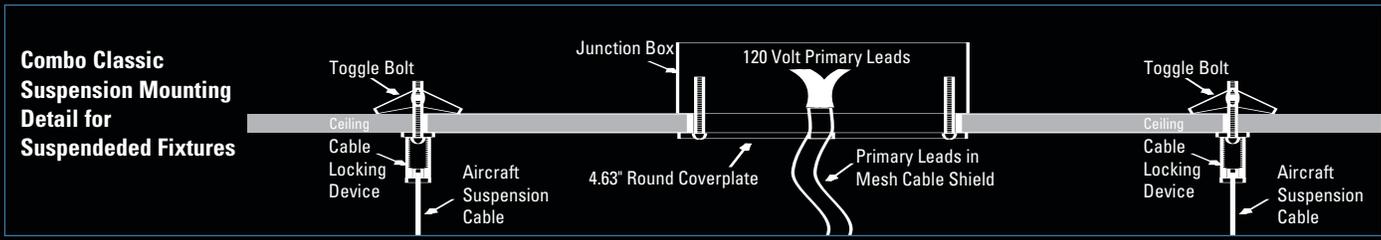

COMBO CLASSIC PAR20MH SUSPENDED FIXTURE CONFIGURATION DIMENSIONS

PAR20MH Fixture Configuration		BX40	BX50	PLL80	PLT26	PLT32	PLT42	T528	T535	T5HO39	T5HO54
A 4 Light PAR20MH with 1 Center Fluor. Cell	●	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"
	■	53.60"	53.60"	53.60"	36.10"	36.60"	37.60"	77.10"	89.10"	65.10"	77.10"
B 4 Light PAR20MH with 2 Center Fluor. Cells	●	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"
	■	79.85"	79.85"	79.85"	44.85"	45.85"	47.85"	126.85"	150.85"	102.85"	126.85"
C 2 Light PAR20MH with 2 Outer Fluor. Cells	●	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"
	■	66.55"	66.55"	66.55"	31.55"	32.55"	34.55"	113.55"	137.55"	89.55"	113.55"
D 2 Light PAR20MH with 2 Alternate Fluor. Cells	●	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"
	■	66.55"	66.55"	66.55"	31.55"	32.55"	34.55"	113.55"	137.55"	89.55"	113.55"
E 2 Light PAR20MH with 2 Center Fluor. Cells	●	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"
	■	66.55"	66.55"	66.55"	31.55"	32.55"	34.55"	113.55"	137.55"	89.55"	113.55"
F 2 Light PAR20MH with 1 Center Fluor. Cell	●	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"
	■	40.30"	40.30"	40.30"	22.80"	23.30"	24.30"	63.80"	75.80"	51.80"	63.80"
G 2 Light PAR20MH with 1 Fluor. Cell	●	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"
	■	40.30"	40.30"	40.30"	22.80"	23.30"	24.30"	63.80"	75.80"	51.80"	63.80"
H 2 Light PAR20MH with 2 Fluor. Cells	●	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"
	■	66.55"	66.55"	66.55"	31.55"	32.55"	34.55"	113.55"	137.55"	89.55"	113.55"
I 1 Light PAR20MH with 1 Fluor. Cell	●	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"
	■	33.65"	33.65"	33.65"	16.15"	16.65"	17.65"	57.15"	69.15"	45.15"	57.15"
J 1 Light PAR20MH with 2 Fluor. Cells	●	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"
	■	59.90"	59.90"	59.90"	24.90"	25.90"	27.90"	106.90"	130.90"	82.90"	106.90"
K 4 Light PAR20MH Double Wide with 2 Fluor. Cells	●	14.05"	14.05"	14.05"	14.05"	14.05"	14.05"	14.05"	14.05"	14.05"	14.05"
	■	40.30"	40.30"	40.30"	22.80"	23.30"	24.30"	63.80"	75.80"	51.80"	63.80"
L 2 Light PAR20MH Double Wide with 2 Fluor. Cells	●	14.05"	14.05"	14.05"	14.05"	14.05"	14.05"	14.05"	14.05"	14.05"	14.05"
	■	33.65"	33.65"	33.65"	16.15"	16.65"	17.65"	57.15"	69.15"	45.15"	57.15"

- Solid aluminum construction.
- Double gimbal lamp holders provide 90° x 90° adjustability.
- Integral Aromat® metal halide ballast

- Fluorescent cells available with a wide array of accessories such as high transmission overlays and parabolic louvers (see page 172)
- Custom configurations are available (Consult RSA Customer Service)
- Also available in Recessed Configurations (see page 128- 149)

Optional Accessories - See page 216 for details.

For fluorescent accessories see page 172.

Baffle	Snoots	Louvers	Lenses	Parabolic Louvers	Diffusers




CS230M70 D BX40 S 120 (Shown with parabolic louver)

COMBO CLASSIC SUSPENDED PAR30MH METAL HALIDE

- A grid style adjustable fixture that is horizontally suspended.
- Combines the use of PAR30 Metal Halide lamps with a choice of fluorescent lamp sources in many fixture configuration styles.

FIXTURE CONFIGURATIONS

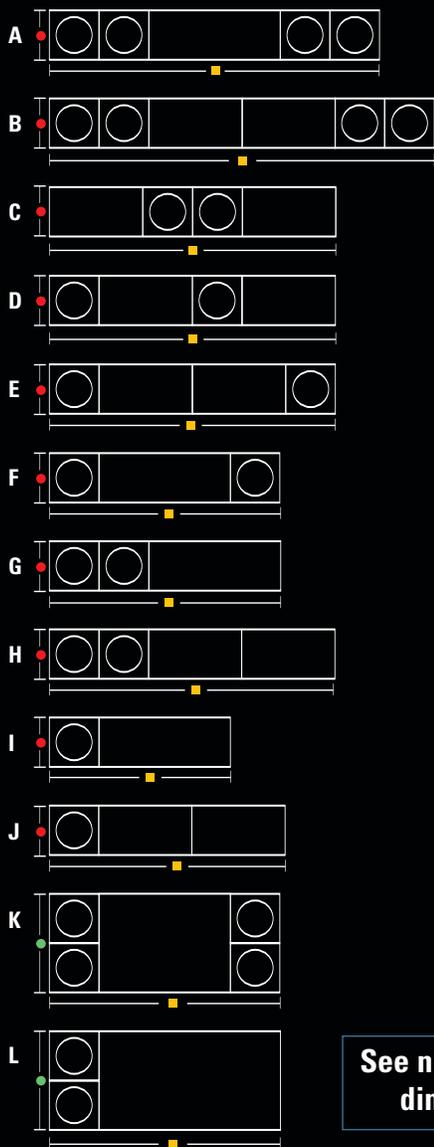

See next page for dimensions



ORDERING

Item #	Description
CS230M39	Combo Classic Suspended PAR30MH 39 watts
CS230M70	Combo Classic Suspended PAR30MH 70 watts

Item #	Description
A	4 Light PAR30MH with 1 Center Fluor. Cell
B	4 Light PAR30MH with 2 Center Fluor. Cells
C	2 Light PAR30MH with 2 Outer Fluor. Cells
D	2 Light PAR30MH with 2 Alternate Fluor. Cells
E	2 Light PAR30MH with 2 Center Fluor. Cells
F	2 Light PAR30MH with 1 Center Fluor. Cell
G	2 Light PAR30MH with 1 Fluor. Cell
H	2 Light PAR30MH with 2 Fluor. Cells
I	1 Light PAR30MH with 1 Fluor. Cell
J	1 Light PAR30MH with 2 Fluor. Cells
K	4 Lt. PAR30MH Double Wide with 2 Fluor. Cells
L	2 Lt. PAR30MH Double Wide with 2 Fluor. Cells

Item #	Description
BX40	40 watt BIAX®
BX50	50 watt BIAX®
PLL80	80 watt PL-L
PLT26	26 watt PL-T
PLT32	32 watt PL-T
PLT42	42 watt PL-T
T528	28 watt T5
T535	35 watt T5
T5H039	39 watt T5HO
T5H054	54 watt T5HO

Item #	Description
BK	Black
WH	White
S	Industrial Silver
PC	Polished Chrome
PT	Custom (Specify)


Item #	Description
120	120 Volts
277	277 Volts

Ordering Example

FIXTURE TYPE	CONFIGURATION	FLUORESCENT CELL	FINISH	VOLTS
CS230M70	D	BX40	S	120

Combo Classic Suspended, Two light 70 Watt PAR30MH with Two 40 Watt BIAX Double Wide Cell, Industrial Silver finish, 120 volts

**Combo Classic
Suspension Mounting
Detail for
Suspended Fixtures**

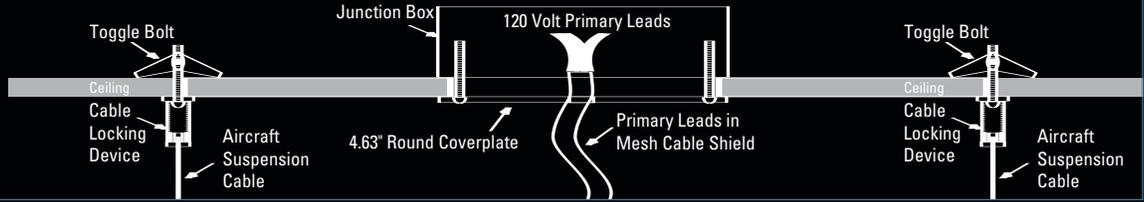

COMBO CLASSIC PAR30MH SUSPENDED FIXTURE CONFIGURATION DIMENSIONS

PAR30MH Fixture Configuration		BX40	BX50	PLL80	PLT26	PLT32	PLT42	T528	T535	T5HO39	T5HO54
A 4 Light PAR30MH with 1 Center Fluor. Cell	●	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"
	■	53.60"	53.60"	53.60"	36.10"	36.60"	37.60"	77.10"	89.10"	65.10"	77.10"
B 4 Light PAR30MH with 2 Center Fluor. Cells	●	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"
	■	79.85"	79.85"	79.85"	44.85"	45.85"	47.85"	126.85"	150.85"	102.85"	126.85"
C 2 Light PAR30MH with 2 Outer Fluor. Cells	●	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"
	■	66.55"	66.55"	66.55"	31.55"	32.55"	34.55"	113.55"	137.55"	89.55"	113.55"
D 2 Light PAR30MH with 2 Alternate Fluor. Cells	●	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"
	■	66.55"	66.55"	66.55"	31.55"	32.55"	34.55"	113.55"	137.55"	89.55"	113.55"
E 2 Light PAR30MH with 2 Center Fluor. Cells	●	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"
	■	66.55"	66.55"	66.55"	31.55"	32.55"	34.55"	113.55"	137.55"	89.55"	113.55"
F 2 Light PAR30MH with 1 Center Fluor. Cell	●	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"
	■	40.30"	40.30"	40.30"	22.80"	23.30"	24.30"	63.80"	75.80"	51.80"	63.80"
G 2 Light PAR30MH with 1 Fluor. Cell	●	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"
	■	40.30"	40.30"	40.30"	22.80"	23.30"	24.30"	63.80"	75.80"	51.80"	63.80"
H 2 Light PAR30MH with 2 Fluor. Cells	●	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"
	■	66.55"	66.55"	66.55"	31.55"	32.55"	34.55"	113.55"	137.55"	89.55"	113.55"
I 1 Light PAR30MH with 1 Fluor. Cell	●	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"
	■	33.65"	33.65"	33.65"	16.15"	16.65"	17.65"	57.15"	69.15"	45.15"	57.15"
J 1 Light PAR30MH with 2 Fluor. Cells	●	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"
	■	59.90"	59.90"	59.90"	24.90"	25.90"	27.90"	106.90"	130.90"	82.90"	106.90"
K 4 Light PAR30MH Double Wide with 2 Fluor. Cells	●	14.05"	14.05"	14.05"	14.05"	14.05"	14.05"	14.05"	14.05"	14.05"	14.05"
	■	40.30"	40.30"	40.30"	22.80"	23.30"	24.30"	63.80"	75.80"	51.80"	63.80"
L 2 Light PAR30MH Double Wide with 2 Fluor. Cells	●	14.05"	14.05"	14.05"	14.05"	14.05"	14.05"	14.05"	14.05"	14.05"	14.05"
	■	33.65"	33.65"	33.65"	16.15"	16.65"	17.65"	57.15"	69.15"	45.15"	57.15"

- Solid aluminum construction.
- Double gimbal lamp holders provide 90° x 90° adjustability.
- Integral Aromat® metal halide ballast

- Fluorescent cells available with a wide array of accessories such as high transmission overlays and parabolic louvers (see page 172)
- Custom configurations are available (Consult RSA Customer Service)
- Also available in Recessed Configurations (see page 128- 149)

Optional Accessories - See page 216 for details.

For fluorescent accessories see page 172.

Baffle	Snoots	Louvers	Lenses	Parabolic Louvers	Diffusers




CS338M100 K BX40 S 120 (Shown with parabolic louver)

COMBO CLASSIC SUSPENDED PAR38MH METAL HALIDE

- A grid style adjustable fixture that is horizontally suspended.
- Combines the use of PAR38 Metal Halide lamps with a choice of fluorescent lamp sources in many fixture configuration styles.

FIXTURE CONFIGURATIONS

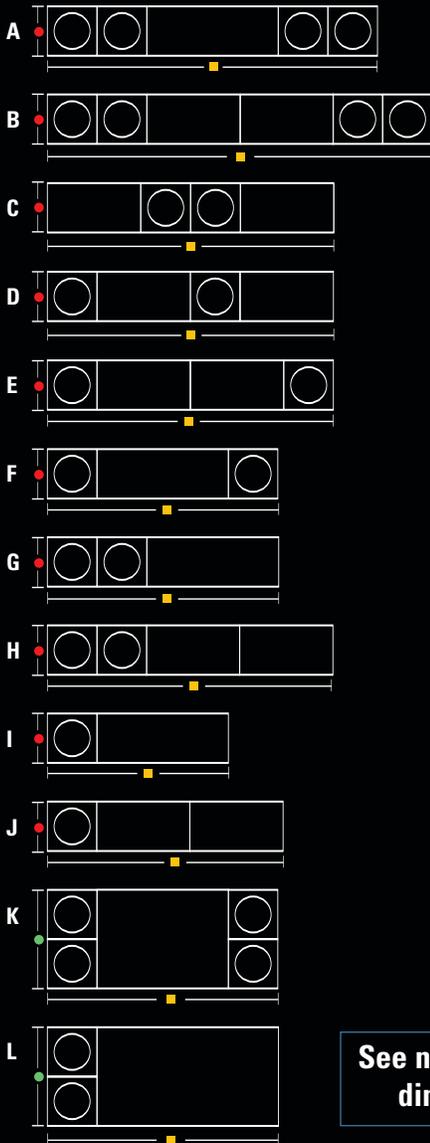

See next page for
dimensions




ORDERING

1	FIXTURE	Item #	Description
		CS338M70	Combo Classic Suspended PAR38MH 70 watts
		CS338M100	Combo Classic Suspended PAR38MH 100 watts
2	FIXTURE CONFIGURATION	Item #	Description
		A	4 Light PAR38MH with 1 Center Fluor. Cell
		B	4 Light PAR38MH with 2 Center Fluor. Cells
		C	2 Light PAR38MH with 2 Outer Fluor. Cells
		D	2 Light PAR38MH with 2 Alternate Fluor. Cells
		E	2 Light PAR38MH with 2 Center Fluor. Cells
		F	2 Light PAR38MH with 1 Center Fluor. Cell
		G	2 Light PAR38MH with 1 Fluor. Cell
		H	2 Light PAR38MH with 2 Fluor. Cells
		I	1 Light PAR38MH with 1 Fluor. Cell
		J	1 Light PAR38MH with 2 Fluor. Cells
		K	4 Lt. PAR38MH Double Wide with 2 Fluor. Cells
L	2 Lt. PAR38MH Double Wide with 2 Fluor. Cells		
3	FLUORESCENT CELL	Item #	Description
		BX40	40 watt BIAX®
		BX50	50 watt BIAX®
		PLL80	80 watt PL-L
		PLT26	26 watt PL-T
		PLT32	32 watt PL-T
		PLT42	42 watt PL-T
		T528	28 watt T5
		T535	35 watt T5
		T5H039	39 watt T5HO
T5H054	54 watt T5HO		
4	FINISH	Item #	Description
		BK	Black
		WH	White
		S	Industrial Silver
		PC	Polished Chrome
PT	Custom (Specify)		
5	VOLTAGE	Item #	Description
		120	120 Volts
		277	277 Volts

Ordering Example

FIXTURE TYPE	CONFIGURATION	FLUORESCENT CELL	FINISH	VOLTS
CS338M100	K	BX40	S	120

Combo Classic Suspended, Four light 100 Watt PAR38MH with Two 40 Watt BIAX Double Wide Cell, Industrial Silver finish, 120 volts

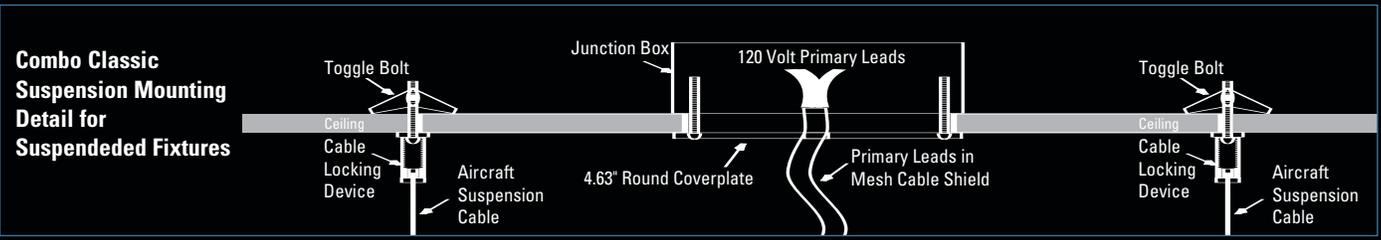

COMBO CLASSIC PAR38MH SUSPENDED FIXTURE CONFIGURATION DIMENSIONS

PAR38MH Fixture Configuration		BX40	BX50	PLL80	PLT26	PLT32	PLT42	T528	T535	T5HO39	T5HO54
A 4 Light PAR38MH with 1 Center Fluor. Cell	●	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"
	■	56.40"	56.40"	56.40"	38.90"	39.40"	40.40"	79.90"	91.90"	67.90"	79.90"
B 4 Light PAR38MH with 2 Center Fluor. Cells	●	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"
	■	82.65"	82.65"	82.65"	47.65"	48.65"	50.65"	129.65"	153.65"	105.65"	129.65"
C 2 Light PAR38MH with 2 Outer Fluor. Cells	●	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"
	■	67.95"	67.95"	67.95"	32.95"	33.95"	35.95"	114.95"	138.95"	90.95"	114.95"
D 2 Light PAR38MH with 2 Alternate Fluor. Cells	●	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"
	■	67.95"	67.95"	67.95"	32.95"	33.95"	35.95"	114.95"	138.95"	90.95"	114.95"
E 2 Light PAR38MH with 2 Center Fluor. Cells	●	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"
	■	67.95"	67.95"	67.95"	32.95"	33.95"	35.95"	114.95"	138.95"	90.95"	114.95"
F 2 Light PAR38MH with 1 Center Fluor. Cell	●	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"
	■	41.70"	41.70"	41.70"	24.20"	24.70"	25.70"	65.20"	77.20"	53.20"	65.20"
G 2 Light PAR38MH with 1 Fluor. Cell	●	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"
	■	41.70"	41.70"	41.70"	24.20"	24.70"	25.70"	65.20"	77.20"	53.20"	65.20"
H 2 Light PAR38MH with 2 Fluor. Cells	●	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"
	■	67.95"	67.95"	67.95"	32.95"	33.95"	35.95"	114.95"	138.95"	90.95"	114.95"
I 1 Light PAR38MH with 1 Fluor. Cell	●	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"
	■	34.35"	34.35"	34.35"	16.85"	17.35"	18.35"	57.85"	69.85"	45.85"	57.85"
J 1 Light PAR38MH with 2 Fluor. Cells	●	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"	8.10"
	■	60.60"	60.60"	60.60"	25.60"	26.60"	28.60"	107.60"	131.60"	83.60"	107.60"
K 4 Light PAR38MH Double Wide with 2 Fluor. Cells	●	15.45"	15.45"	15.45"	15.45"	15.45"	15.45"	15.45"	15.45"	15.45"	15.45"
	■	41.70"	41.70"	41.70"	24.20"	24.70"	25.70"	65.20"	77.20"	53.20"	65.20"
L 2 Light PAR38MH Double Wide with 2 Fluor. Cells	●	15.45"	15.45"	15.45"	15.45"	15.45"	15.45"	15.45"	15.45"	15.45"	15.45"
	■	34.35"	34.35"	34.35"	16.85"	17.35"	18.35"	57.85"	69.85"	45.85"	57.85"


- Solid aluminum construction.
- Double gimbal lamp holders provide 90° x 90° adjustability.
- Integral Aromat® metal halide ballast
- Fluorescent cells available with a wide array of accessories such as high transmission overlays and parabolic louvers (see page 172)
- Custom configurations are available (Consult RSA Customer Service)
- Also available in Recessed Configurations (see page 128- 149)

Optional Accessories - See page 216 for details.				For fluorescent accessories see page 172.	
Baffle	Snoots	Louvers	Lenses	Parabolic Louvers	Diffusers

COMBO CLASSIC SUSPENDED T4 G8.5 METAL HALIDE

- A grid style adjustable fixture that is horizontally suspended.
- Combines the use of T4 Metal Halide lamp and a high performance aluminum reflector with a choice of fluorescent lamp sources in many fixture configuration styles.

FIXTURE CONFIGURATIONS

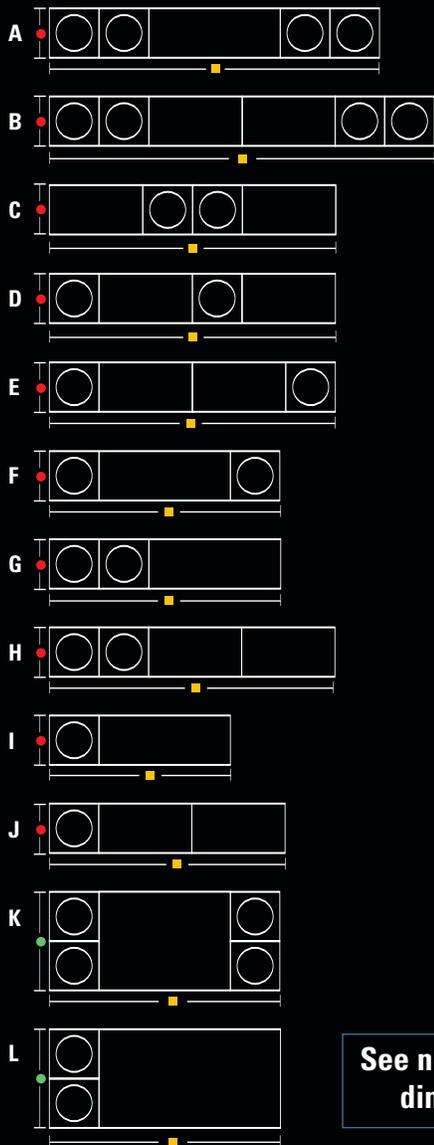

See next page for
dimensions



CS2TC35 E BX40 15 S 277 (Shown with textured white diffuser)

ORDERING

Item #	Description
CS2TC35	Combo Classic Suspended T4 G8.5MH 35 watts
CS2TC70	Combo Classic Suspended T4 G8.5MH 70 watts

Item #	Description
A	4 Light T4MH with 1 Center Fluor. Cell
B	4 Light T4MH with 2 Center Fluor. Cells
C	2 Light T4MH with 2 Outer Fluor. Cells
D	2 Light T4MH with 2 Alternate Fluor. Cells
E	2 Light T4MH with 2 Center Fluor. Cells
F	2 Light T4MH with 1 Center Fluor. Cell
G	2 Light T4MH with 1 Fluor. Cell
H	2 Light T4MH with 2 Fluor. Cells
I	1 Light T4MH with 1 Fluor. Cell
J	1 Light T4MH with 2 Fluor. Cells
K	4 Light T4MH Double Wide with 2 Fluor. Cells
L	2 Light T4MH Double Wide with 2 Fluor. Cells

Item #	Description	Item #	Description
BX40	40 watt BIAX®	PLT42	42 watt PL-T
BX50	50 watt BIAX®	T528	28 watt T5
PLL80	80 watt PL-L	T535	35 watt T5
PLT26	26 watt PL-T	T5H039	39 watt T5HO
PLT32	32 watt PL-T	T5H054	54 watt T5HO

Item #	Description
15	Reflector w/ 15° Narrow Spread
27	Reflector w/ 27° Medium Spread
55	Reflector w/ 55° Wide Spread

See page 217 for details


Item #	Description
BK	Black
WH	White
S	Industrial Silver
PC	Polished Chrome
PT	Custom (Specify)

Item #	Description
120	120 Volts
277	277 Volts

Ordering Example

FIXTURE TYPE	CONFIGURATION	FLUORESCENT CELL	DISTRIBUTION	FINISH	VOLTS
CS2TC35	E	BX40	15	S	277

Combo Classic Suspended, Two light 35 Watt T4 G8.5 with Two 40 Watt BIAX Cell, Industrial Silver finish, 277 volts

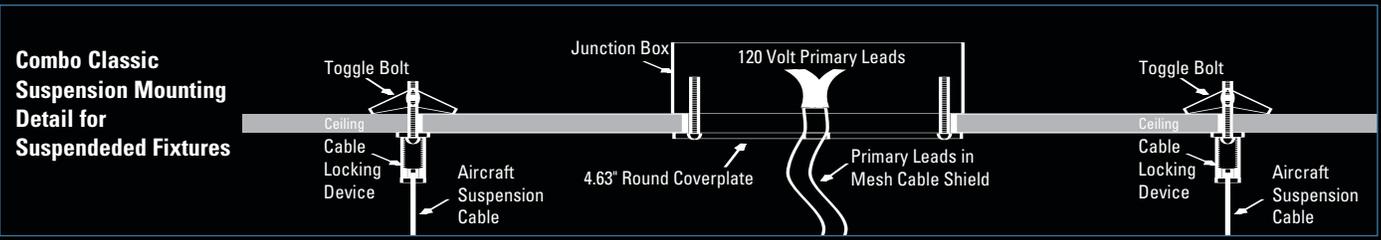

COMBO CLASSIC T4MH SUSPENDED FIXTURE CONFIGURATION DIMENSIONS

T4MH Fixture Configuration		BX40	BX50	PLL80	PLT26	PLT32	PLT42	T528	T535	T5HO39	T5HO54
A 4 Light T4MH with 1 Center Fluor. Cell	●	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"
	■	53.60"	53.60"	53.60"	36.10"	36.60"	37.60"	77.10"	89.10"	65.10"	77.10"
B 4 Light T4MH with 2 Center Fluor. Cells	●	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"
	■	79.85"	79.85"	79.85"	44.85"	45.85"	47.85"	126.85"	150.85"	102.85"	126.85"
C 2 Light T4MH with 2 Outer Fluor. Cells	●	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"
	■	66.55"	66.55"	66.55"	31.55"	32.55"	34.55"	113.55"	137.55"	89.55"	113.55"
D 2 Light T4MH with 2 Alternate Fluor. Cells	●	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"
	■	66.55"	66.55"	66.55"	31.55"	32.55"	34.55"	113.55"	137.55"	89.55"	113.55"
E 2 Light T4MH with 2 Center Fluor. Cells	●	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"
	■	66.55"	66.55"	66.55"	31.55"	32.55"	34.55"	113.55"	137.55"	89.55"	113.55"
F 2 Light T4MH with 1 Center Fluor. Cell	●	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"
	■	40.30"	40.30"	40.30"	22.80"	23.30"	24.30"	63.80"	75.80"	51.80"	63.80"
G 2 Light T4MH with 1 Fluor. Cell	●	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"
	■	40.30"	40.30"	40.30"	22.80"	23.30"	24.30"	63.80"	75.80"	51.80"	63.80"
H 2 Light T4MH with 2 Fluor. Cells	●	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"
	■	66.55"	66.55"	66.55"	31.55"	32.55"	34.55"	113.55"	137.55"	89.55"	113.55"
I 1 Light T4MH with 1 Fluor. Cell	●	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"
	■	33.65"	33.65"	33.65"	16.15"	16.65"	17.65"	57.15"	69.15"	45.15"	57.15"
J 1 Light T4MH with 2 Fluor. Cells	●	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"	7.40"
	■	59.90"	59.90"	59.90"	24.90"	25.90"	27.90"	106.90"	130.90"	82.90"	106.90"
K 4 Light T4MH Double Wide with 2 Fluor. Cells	●	14.05"	14.05"	14.05"	14.05"	14.05"	14.05"	14.05"	14.05"	14.05"	14.05"
	■	40.30"	40.30"	40.30"	22.80"	23.30"	24.30"	63.80"	75.80"	51.80"	63.80"
L 2 Light T4MH Double Wide with 2 Fluor. Cells	●	14.05"	14.05"	14.05"	14.05"	14.05"	14.05"	14.05"	14.05"	14.05"	14.05"
	■	33.65"	33.65"	33.65"	16.15"	16.65"	17.65"	57.15"	69.15"	45.15"	57.15"

- Solid aluminum construction.
- Double gimbal lamp holders provide 90° x 90° adjustability.
- Integral Aromat® metal halide ballast
- Fluorescent cells available with a wide array of accessories such as high transmission overlays and parabolic louvers (see page 172)
- Custom configurations are available (Consult RSA Customer Service)
- Also available in Recessed Configurations (see page 128- 149)

Optional Accessories - See page 216 for details.				For fluorescent accessories see page 172.	
Baffle	Snoots	Louvers	Lenses	Parabolic Louvers	Diffusers



Diffusers for Fluorescent Lamps

Adder # **Description**
-TWD Textured White Diffuser .125" Thickness
 100% Virgin Acrylic - 52% Light Transmission



Smooth White Flat Sheet is extruded from high impact virgin acrylic meeting IES, NEMA-SPI joint specifications for use in applications. Acrylic lighting panels are 100% high molecular weight virgin material meeting grade 8 requirements as set forth in Table 2 of ASTM D-788-69A.

Adder # **Description**
-MPD Male Conical Prism Diffuser .125" Thickness
 100% Virgin Acrylic



Male Conical Prism diffuser is clear acrylic. Prisms shall be 3/16" square based male cones aligned parallel and perpendicular to the length and width of the panel. Minimum prism height shall be .080". This diffuser exceeds IES-NEMA-SPI standards for acrylic material by 100%. Under normal interior conditions these panels will perform satisfactorily for 20 years.

Louvers & Overlays

Adder # **Description**
-CB1 Aluminum Parabolic
 Louver
 Silver Semi-Specular
 Low Iridescent

 2" Cell

Adder # **Description**
-CB2 Aluminum Parabolic
 Louver
 Silver Semi-Specular
 Low Iridescent
 Low Profile

 1" Cell

Adder # **Description**
-HTO High Transmission Overlay for
 use with Parabolic Louver
 .0625" Thickness

Overlay is placed between the lamp source and the louver to reduce glare.

