


Electric Slide-In Cooktop

E36EC75HSS



Ceramic Smoothtop Glass

Glass cooktop is flat, smooth and easy to clean and maintain.



Expandable, Flexible Six Element Configuration

Concentric rings and bridge elements are clearly marked on the surface. Combinations allow the user to cook with a variety of pan shapes and sizes at up to 4400 watts.



Precision Set™ Electronic Controls

Ergonomically designed for visibility and comfort. Large, professional-style knobs and precise digital display eliminate guesswork while cooking. Optional Black Knobs Kit available.



Versatile Griddle Plate

No cooktop is complete without this specially designed griddle. Coated with a nonstick surface, it is quick to clean and extremely durable. Ideal for breakfast, lunch and dinner.

36" ELECTRIC SLIDE-IN COOKTOP

Configuration	6 Electric Elements
---------------	---------------------

FEATURES

Black Ceramic Smoothtop Glass Surface	Yes
Precision Set™ Electronic Controls	6
6" Element – 1200W	2
6" to 9" Expandable Element – 1600W/3000W	1
5" to 7" to 9" Expandable Element – 1000W/1800W/2700W	1
7"/Bridge/7" Elements – 1800W/800W/1800W	1
Hot Surface Indicator Lights (H.S. in displays)	6 Positions
Spill Control Cooktop	Yes

ACCESSORIES

Griddle	Included
9" Stainless Steel Backsplash – 903048-9010	Optional
Depth Adjustment Filler Kit* – 903051-9010	Optional
Black Knobs Kit – 903127-9010	Optional

SPECIFICATIONS

Overall Exterior Dimensions –	
Height	7-3/4"
Width	35-7/8"
Depth	25-3/4"
Power Supply Location	Right Rear
Amps @ 240/208 Volts	49.2/42.6
Connected Load (kW Rating) @ 240/208 Volts	11.8/8.8
Electrical – Single phase 3- or 4-wire cable, 120/240V or 120/208V, 60Hz, fused on both sides of line with ground.	Required
Armored Electrical Cable	Included
Approved for Single Oven Combination Installation**	No
Approved for Downdraft Vent Combination Installation†	Yes
Product Weight	68 Lbs.
Shipping Weight (Approx.)	72 Lbs.


* When replacing an existing cooktop with countertop cutout deeper than 7-1/4" and less than 8-1/2", order free Depth Adjustment Filler Kit.

** Not approved to be used over any Electrolux ICON® Single Wall Oven.

† Approved to be used in combination with an Electrolux ICON® Downdraft Vent (without optional backsplash).

NOTE: Always consult local and/or national electric codes. Refer to Product Installation Guide for detailed installation instructions on the web at electroluxicon.com.

Specifications subject to change.

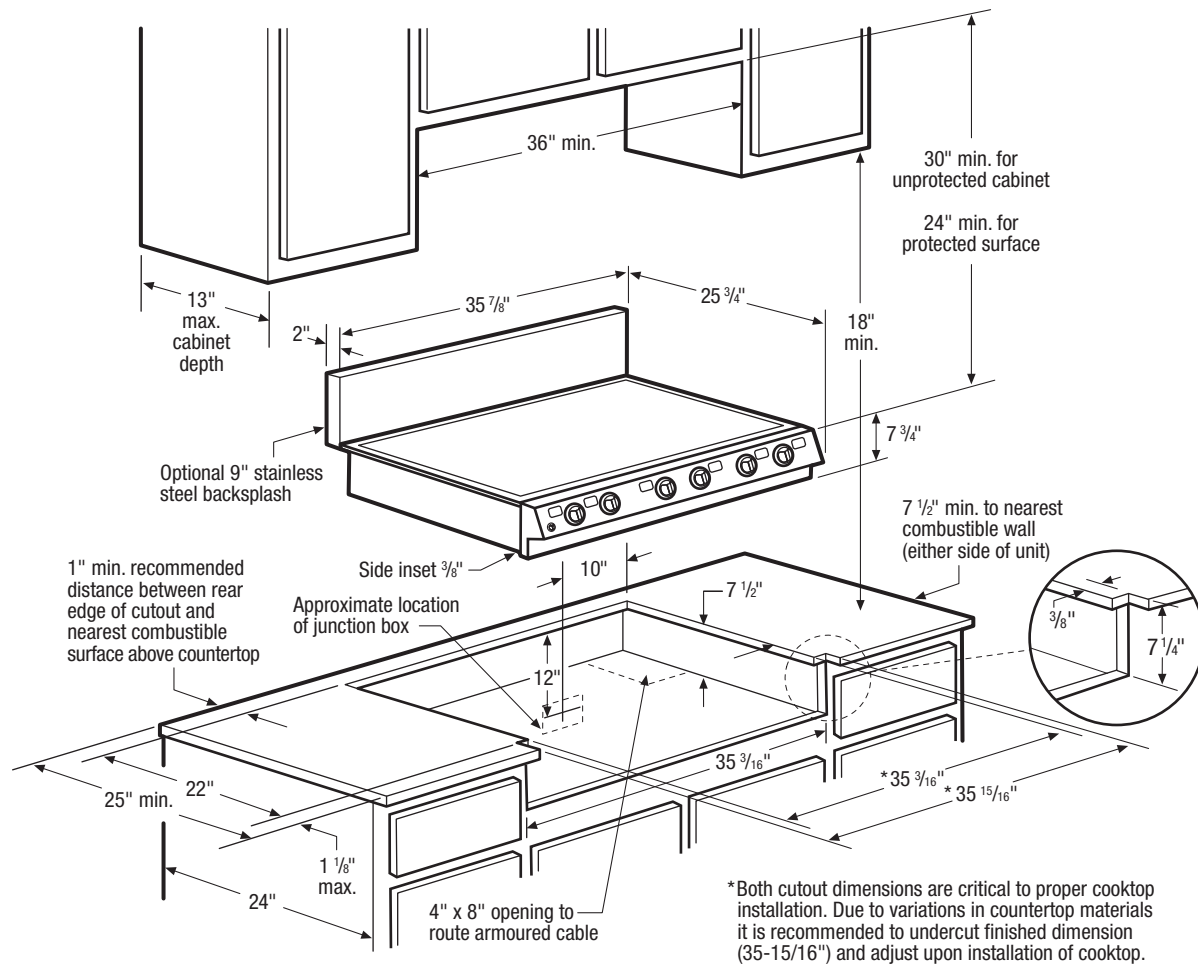

36" Electric Slide-In Cooktop Specifications

- Product Weight – 68 Lbs.
- Single phase 3- or 4-wire cable, 120/240 or 120/208 Volt, 60 Hertz AC only electrical supply with ground required on separate circuit fused on both sides of line.
- Connected Load (kW Rating) @ 240/208 Volts = 11.8/8.8 kW
- Amps @ 240/208 Volts = 49.2/42.6 Amps
- Always consult local and/or national electric codes.
- Respect critical dimensions as noted for proper installation of cooktop.
- Allow 2" space below armored cable opening to clear electrical cable and allow space for installation of junction box on wall at back of cooktop.
- Overhead cabinetry should not exceed a 13" maximum depth.
- Allow 30" minimum clearance between top of cooktop and bottom of unprotected wood or metal overhead cabinetry.
- Absolute minimum horizontal distance between overhead cabinets installed to either side of appliance must be no less than maximum width of appliance.
- Allow 24" minimum clearance when bottom of wood or metal overhead cabinet is protected by not less than 1/8" flame-retardant millboard covered with not less than No. 28 MGS sheet steel, 0.015" stainless steel, 0.024" aluminum or 0.020" copper.
- Allow 1" minimum clearance between rear edge of cutout and nearest combustible surface above countertop.
- Allow 7-1/2" minimum clearance from edge of cooktop to nearest combustible wall on either side of unit.
- It is recommended that drawers not be used beneath cooktop.
- To reduce risk of fire when using overhead cabinetry, install vent hood that projects horizontally a recommended minimum of 7" beyond bottom of cabinets.
- Electric Slide-In Cooktop model E36EC75HSS is NOT approved to be used over any Electrolux ICON® Single Wall Oven.
- Electric Slide-In Cooktop model E36EC75HSS (without optional backsplash) is approved to be used in combination with an Electrolux ICON® Downdraft Vent. (Refer to Slide-In Cooktop/Downdraft Vent Countertop Preparation Specifications and drawing on web.)

Note: For planning purposes only. Refer to Product Installation Guide on the web at electroluxicon.com for detailed instructions.

Optional Accessories


- When replacing an existing cooktop with countertop cutout deeper than 7-1/4" and less than 8-1/2", order free Depth Adjustment Filler Kit – (903051-9010).
- 9" Stainless Steel Backsplash – (903048-9010).
- Black Knobs Kit – (903127-9010).

Electrolux Major Appliances, N.A.

USA • 250 Bobby Jones Expressway • Augusta, GA 30907 • 1-877-4electrolux (1-877-435-3287) • electroluxicon.com
 CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • electroluxicon.ca

Countertop Preparation for 30" & 36" Slide-In Cooktop/Downdraft Vent Installation

For detailed cooktop and downdraft vent installation specifications, refer to model-specific product page and installation guide on web

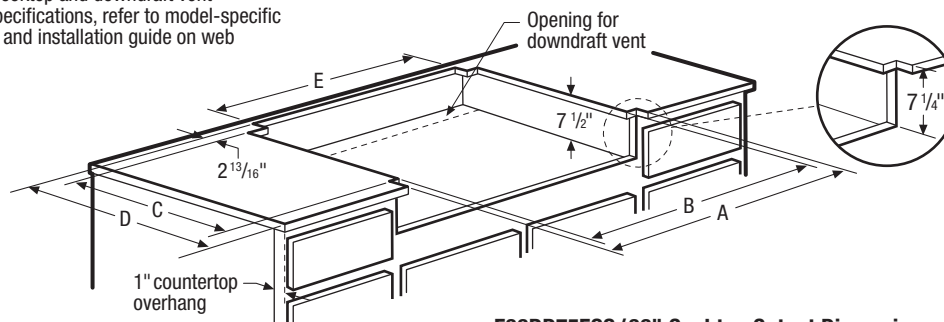

E30DD75ESS/30" Cooktop Cutout Dimensions

30" Cooktop	A	B	C	D	E
E30GC74GPS*	29 ¹⁵ / ₁₆ "	29 ³ / ₁₆ "	22"	25 ¹³ / ₁₆ "	27 ¹ / ₂ "

*Proper combination installation will require cooktop power cord to be relocated to underside of unit. (For details, refer to 30" & 36" Gas Slide-In Cooktop Power Cord Relocation Instructions page.)

E36DD75ESS/36" Cooktop Cutout Dimensions

36" Cooktops	A	B	C	D	E
E36EC75DSS	35 ¹⁵ / ₁₆ "	35 ³ / ₁₆ "	22"	25 ¹³ / ₁₆ "	33 ³ / ₄ "
E36EC75ESS	35 ¹⁵ / ₁₆ "	35 ³ / ₁₆ "	22"	25 ¹³ / ₁₆ "	33 ³ / ₄ "
E36EC75HSS	35 ¹⁵ / ₁₆ "	35 ³ / ₁₆ "	22"	25 ¹³ / ₁₆ "	33 ³ / ₄ "
E36GC75DSS*	35 ¹⁵ / ₁₆ "	35 ³ / ₁₆ "	22"	25 ¹³ / ₁₆ "	33 ³ / ₄ "
E36GC75ESS*	35 ¹⁵ / ₁₆ "	35 ³ / ₁₆ "	22"	25 ¹³ / ₁₆ "	33 ³ / ₄ "
E36GC75GSS*	35 ¹⁵ / ₁₆ "	35 ³ / ₁₆ "	22"	25 ¹³ / ₁₆ "	33 ³ / ₄ "
E36GC76EPS*	35 ¹⁵ / ₁₆ "	35 ³ / ₁₆ "	22"	25 ¹³ / ₁₆ "	33 ³ / ₄ "
E36GC76GPS*	35 ¹⁵ / ₁₆ "	35 ³ / ₁₆ "	22"	25 ¹³ / ₁₆ "	33 ³ / ₄ "

Slide-In Cooktop/Downdraft Vent Countertop Preparation Specifications

- For detailed Slide-In Cooktop installation, refer to model-specific product page and installation guide on web. Plan installation so that all required minimum clearances between cooktop, overhead cabinets and adjacent vertical walls are provided.
- Position cooktop/vent cutout so all required minimum clearances are met.
- Minimum flat countertop area must meet or exceed combined overall width and depth as shown.
- Separate circuits required for cooktop and vent. (Refer to product-specific electrical specifications.)
- Always consult local and/or national electric codes. Check local building codes for installation requirements, as they may vary per locale.
- Proper combination installation will require 30" & 36" Gas Slide-In Cooktop power cord to be relocated to underside of unit. (For details, refer to 30" & 36" Gas Slide-In Cooktop Power Cord Relocation Instructions on web.)

Downdraft Vent Specifications

- For detailed Downdraft Vent installations, refer to model-specific product page and installation guide on web.
- Voltage Rating – 120V/ 60Hz/ 15 Amps
- Connected Load (kW Rating) @ 120 Volts = 1.0kW
(For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.)

- Amps @ 120 Volts = 8.0 Amps
- Vent unit outside of building only.
- Vent must be installed in vertical orientation only.
- 1,600 CFM remote exhaust blower (part number 5304444802) included with vent – shipped in separate box.
- Do not use flexible duct. Round duct instead of rectangular duct recommended, especially when elbows are required.
- When multiple elbows are necessary, ensure a minimum of 24" of straight duct between any two elbows.
- Thermal breaks such as short section of nonmetallic duct, should be used in areas of extreme cold.
- For most efficient airflow exhaust, use a straight run or as few elbows as possible.
- Cold weather installations should have additional backdraft damper installed.
- Installing a Downdraft Vent in combination with any gas cooking surface will affect optimum burner efficiency.
- Downdraft Vents can NOT be used in combination with any cooktop backsplash.

Note: For planning purposes only. Refer to Product Installation Guide on the web at electroluxicon.com for detailed instructions.