



LYNX - Low Voltage Miniature MR16 Trims

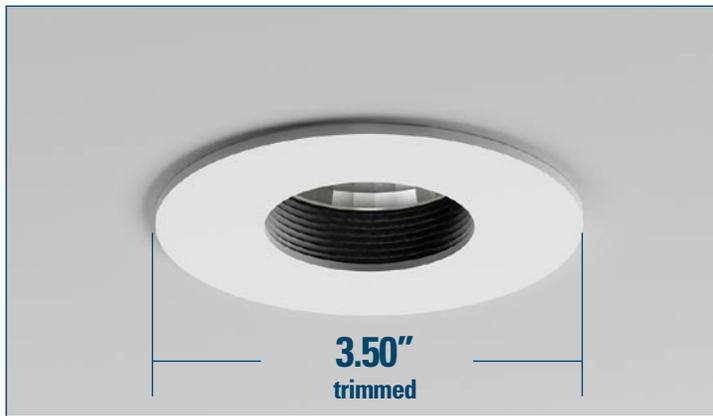

RSA's LYNX Recessed Lighting fixtures are the industry's smallest die cast MR16 fixtures. The LYNX system includes a miniature MR16 trim, an extruded aluminum housing, and a remote electrical enclosure with an integral magnetic or electronic transformer and wiring compartment. The transformer/wiring enclosure is attached to the trim housing via 18" of flexible electrical conduit.

The Lynx trims are offered in standard flanged versions with a 3.50" o.d. or as a trimless fixture with a 2.66" o.d. The trimmed version utilizes heavy duty "swing-away" mounting clips for secure installation. Trimless installation is achieved with the use of a perforated metal mesh plate with a lock-down mechanism that adjusts for various drywall thicknesses.

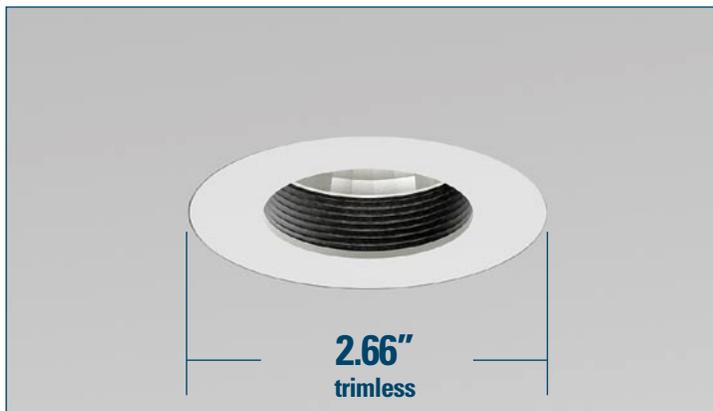

Lynx trim styles include regressed black baffle, adjustable gimbal, smooth, splayed regress and deep splayed regress with 45° cut-off. All standard architectural finishes are available.

NEW - The LX3004 trim is now available with the ES16MH BriteSpot® lamp. See page 89 for details.

Lynx Trimmed Fixture - Housing Assembly

- 18" flexible conduit
- Remote cylindrical transformer enclosure with transformer and splice box
- 1/8" lip at housing opening for standard trim installation
- Die-cast lamp holder assembly
- Miniature machined aluminum housing with air vent holes for cooler operation
- Heavy duty swing-away mounting clips
- Adjustable for 1/2" to 3/4" drywall thickness.

LX3001

LX3002

LX3003

LX3004

Available in both MR16 and ES16MH lamps

Lynx Trimless Fixture - Housing Assembly

- 18" flexible conduit
- Remote cylindrical transformer enclosure with transformer and splice box
- Perforated metal drywall plate for TRIMLESS ceiling mounting.
- Die-cast lamp holder assembly
- Miniature machined aluminum housing with air vent holes for cooler operation
- Heavy duty swing-away mounting clips
- Adjustable for 1/2" to 3/4" drywall thickness.

LX3001TR

LX3002TR

LX3003TR

LX3004TR

Available in both MR16 and ES16MH lamps



TRIMMED



TRIMLESS

LYNX REGRESSED BLACK BAFFLE

Item #



- LX3001** 3.50" Downlight Trim w/ Regressed Black Baffle
12V MR16 37W Max.
- LX3001TR** 2.66" Downlight Trimless w/ Regressed Black Baffle
12V MR16 37W Max.

Finish


- WH** White
- BK** Black
- S** Industrial Silver
- SS** Stainless Steel (painted)
- PM** Primer

Includes housing, transformer with cylindrical enclosure, 18" flexible electrical conduit between housing and transformer enclosure.


Specify "MAG" for magnetic transformer or "ELC" for electronic.

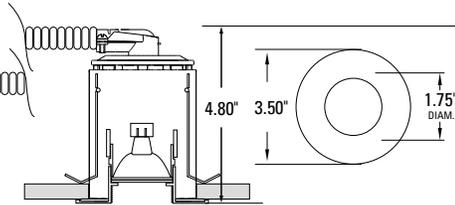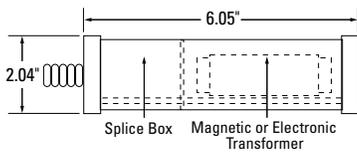

LX3001 - 2.88" ceiling cut-out

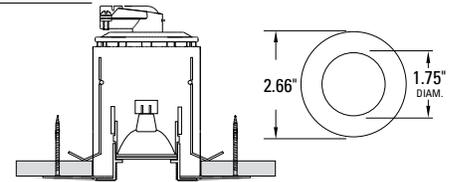

LX3001TR - 2.88" ceiling cut-out

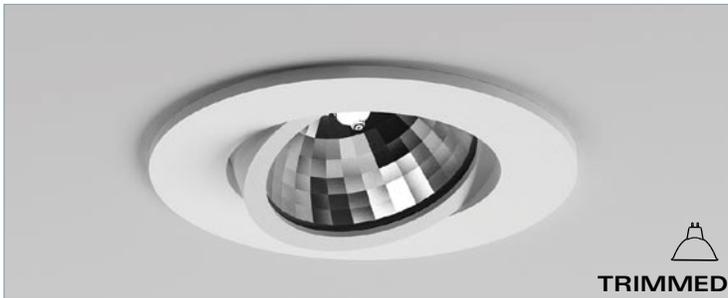

TRIMMED

NEW



TRIMLESS

LYNX 30° ADJUSTABLE GIMBAL

Item #



- LX3002** 3.50" Trim w/ 30° Adjustable Gimbal
12V MR16 37W Max.
- LX3002TR** 2.66" Trimless w/ 30° Adjustable Gimbal
12V MR16 37W Max.

Finish


- WH** White
- BK** Black
- S** Industrial Silver
- SS** Stainless Steel (painted)
- PM** Primer

Includes housing, transformer with cylindrical enclosure, 18" flexible electrical conduit between housing and transformer enclosure.

Specify "MAG" for magnetic transformer or "ELC" for electronic.

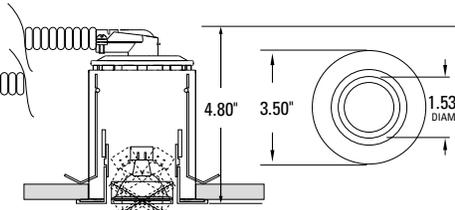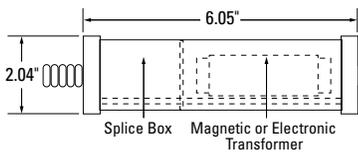

LX3002 - 2.88" ceiling cut-out

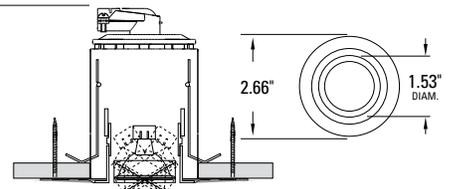

LX3002TR - 2.88" ceiling cut-out




LYNX SPLAYED TRIM SMOOTH REGRESS

Item #	Description
LX3003	3.50" Downlight Trim w/ Smooth Regress 12V MR16 37W Max.
LX3003TR	2.66" Downlight Trimless w/ Smooth Regress 12V MR16 37W Max.

Finish	Description
WH	White
BK	Black
S	Industrial Silver
SS	Stainless Steel (painted)
PM	Primer

Includes housing, transformer with cylindrical enclosure, 18" flexible electrical conduit between housing and transformer enclosure.

Specify "MAG" for magnetic transformer or "ELC" for electronic.

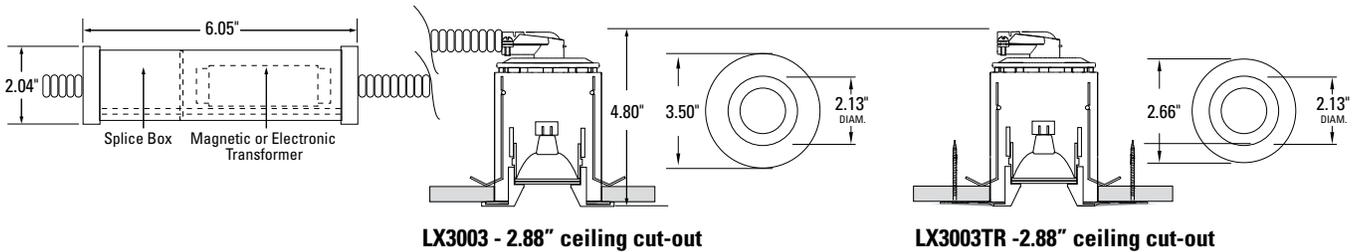

LX3003 - 2.88" ceiling cut-out

LX3003TR - 2.88" ceiling cut-out




**LYNX SPLAYED TRIM SMOOTH REGRESS
45° CUT-OFF**

Item #	Description
LX3004	3.50" Downlight Trim w/ Smooth Regress 45° Cut-Off - 12V MR16-IRC or MR16 37W Max.
LX3004TR	2.66" Downlight Trimless w/ Smooth Regress 45° Cut-Off - 12V MR16-IRC or MR16 37W Max.

Finish	Description
WH	White
BK	Black
S	Industrial Silver
SS	Stainless Steel (painted)
PM	Primer

Includes housing, transformer with cylindrical enclosure, 18" flexible electrical conduit between housing and transformer enclosure.

Specify "MAG" for magnetic transformer or "ELC" for electronic.

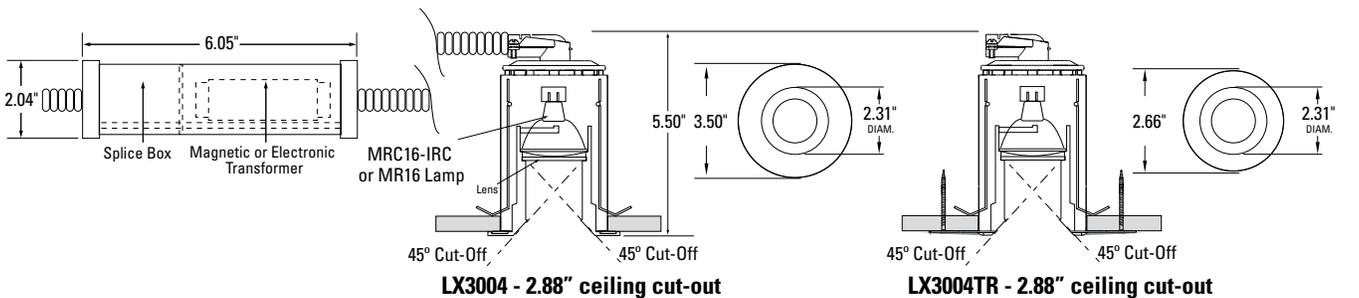

LX3004 - 2.88" ceiling cut-out

LX3004TR - 2.88" ceiling cut-out







**LYNX SPLAYED TRIM SMOOTH REGRESS
45° CUT-OFF - FOR ES16MH BRITESPOT®**

Item #	
LX3004MH	3.50" Downlight Trim w/ Smooth Regress 45° Cut-Off - ES16MH
LX3004TRMH	2.66" Downlight Trimless w/ Smooth Regress 45° Cut-Off - ES16MH
Wattage	
20	20 Watt ES16 Metal Halide
39	39 Watt ES16 Metal Halide
Finish	
WH	White
BK	Black
S	Industrial Silver
SS	Stainless Steel (painted)
PM	Primer

Includes housing, ballast with cylindrical enclosure and thermal protector, 18" flexible electrical conduit between housing and transformer enclosure.

