


# The New Standard in Trimless Recessed Lighting

## QUIET CEILING



Housing and trim internal finish is ultra-flat black. This image was lightened to provide visual detail.

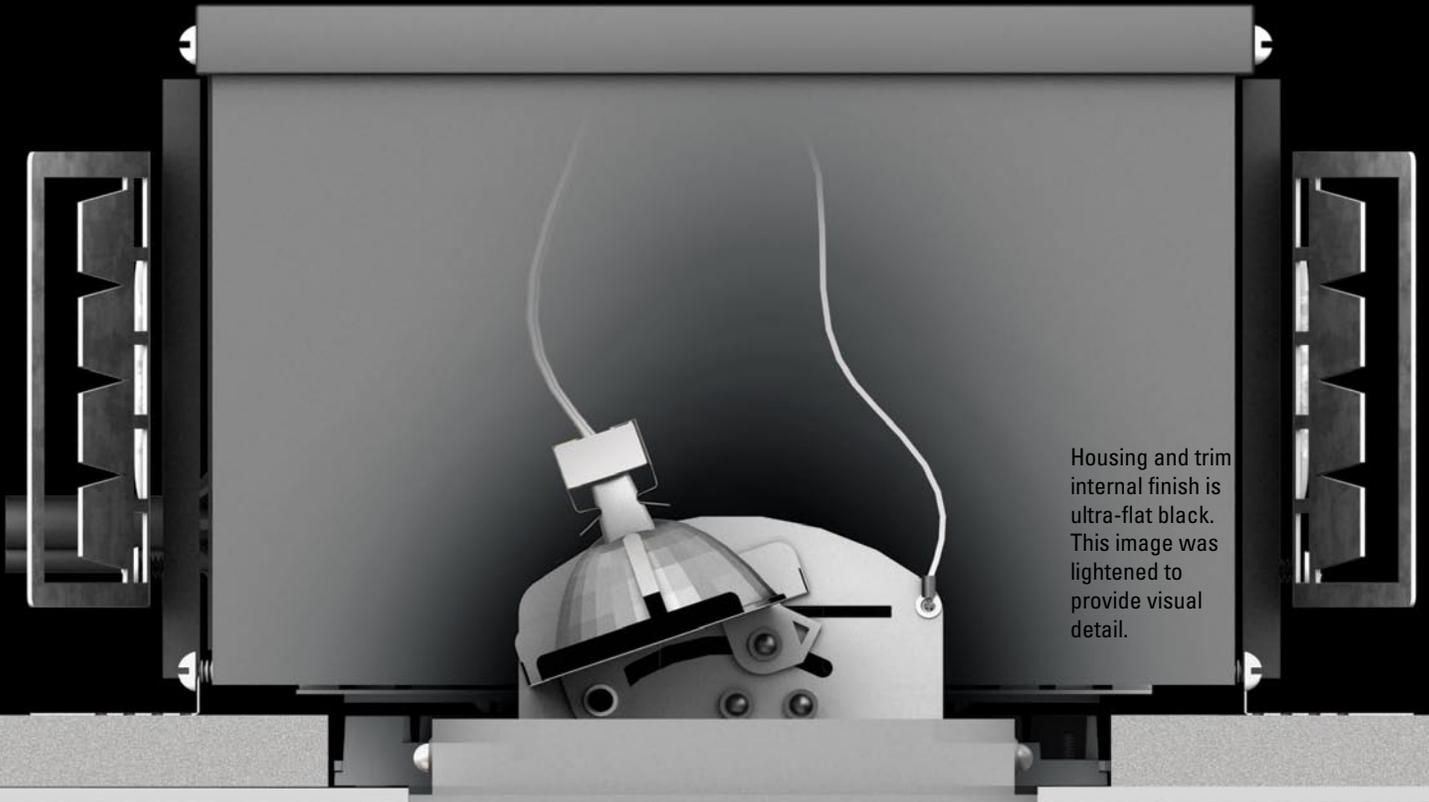

This photo shows a Quiet Ceiling pinhole trim in a finished installation. Notice how the ceiling compound is applied right to the edge of the trim to provide a virtually seamless perimeter around the trim. The trim may be pulled out of the ceiling for maintenance and placed back in with no change in position.

With Quiet Ceiling Trimless recessed fixtures, the ceiling's mudding compound is applied right to the fixture, providing an almost non-existent seam between the ceiling and the fixture.

Because no part of the Quiet Ceiling fixture is exposed below the ceiling, a smooth, uninterrupted surface can now be achieved in lighting applications. Quiet Ceiling maintains the architectural integrity of the ceiling.


Quiet Ceiling incorporates RSA's Hot Aiming precision rack-and-pinion lamp adjustment mechanism for unparalleled versatility. Lamps may be aimed with the use of an ordinary phillips screwdriver while the power is on. This enables the designer to "dial-in" the lamp beam for perfect illumination every time.

New construction, I.C. (insulated ceiling) and remodel housings are available. A special housing for installation in non-drywall type ceilings, such as wood or marble, is also available.


Standard trims for Quiet Ceiling include slot aperture, pinhole, downlight and truncated cone with internal reflectors, adjustable square downlights, shower-lights and wall wash units.




Round Housing  
Adjustable Mud Ring

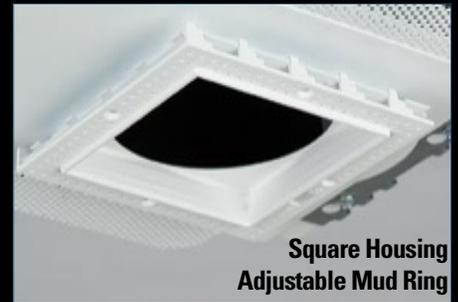


Square Housing  
Adjustable Mud Ring

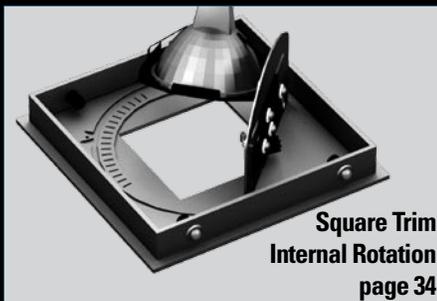

Square Trim  
Internal Rotation  
page 34

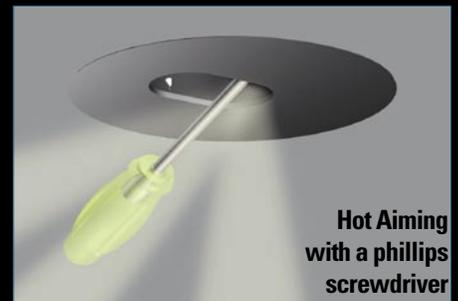


Hot Aiming  
with a phillips  
screwdriver

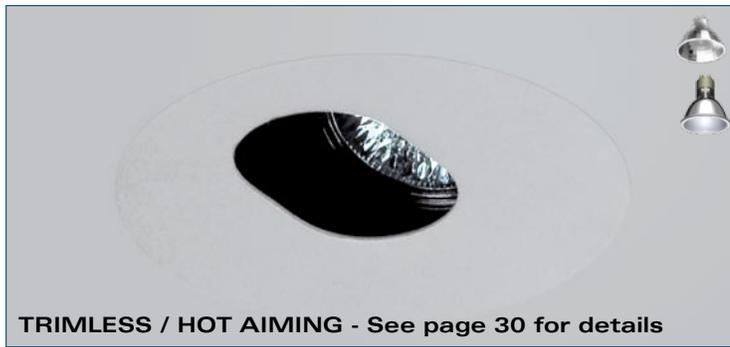

## QUIET CEILING SLOT APERTURE

<b>Item #</b>	
<b>QCT1675</b>	4" 45° adjustable slot aperture - MR16 71W max.
<b>QCT1675MH</b>	4" 45° adjustable slot aperture - ES16MH
<b>Finish</b>	
<b>WH</b>	White
<b>BK</b>	Black
<b>S</b>	Industrial Silver
<b>SS</b>	Stainless Steel (painted)
<b>PM</b>	Primer

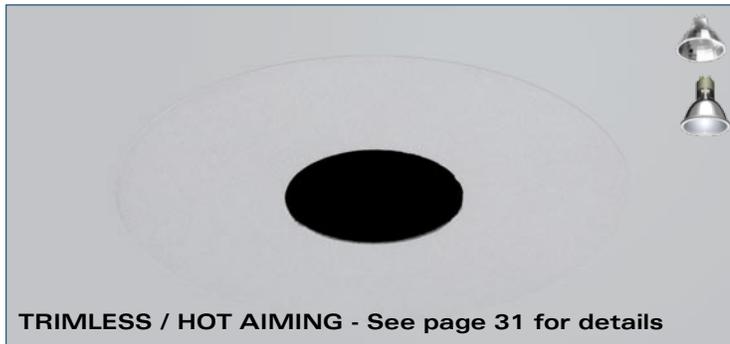

## QUIET CEILING PINHOLE

<b>Item #</b>	
<b>QCT1775</b>	4" 45° adjustable pinhole - MR16 71W max.
<b>QCT1775MH</b>	4" 45° adjustable pinhole - ES16MH
<b>Finish</b>	
<b>WH</b>	White
<b>BK</b>	Black
<b>S</b>	Industrial Silver
<b>SS</b>	Stainless Steel (painted)
<b>PM</b>	Primer



## QUIET CEILING DOWNLIGHT

<b>Item #</b>		
<b>QCT1975</b>	4" 15° adjustable downlight - MR16 71W max.	
<b>QCT1975MH</b>	4" 15° adjustable downlight - ES16MH	
<b>Trim Finish</b>	<b>Reflector Finish</b>	
<b>WH</b>	White	<b>Clear Alzak®</b>
<b>BK</b>	Black	
<b>S</b>	Industrial Silver	
<b>SS</b>	Stainless Steel (painted)	
<b>PM</b>	Primer	




## QUIET CEILING TRUNCATED CONE

<b>Item #</b>		
<b>QCT2075</b>	4" adjustable truncated cone - MR16 71W max.	
<b>QCT2075MH</b>	4" adjustable truncated cone - ES16MH	
<b>Finish</b>	<b>Reflector Finish</b>	
<b>WH</b>	White	<b>Etched Aluminum</b>
<b>BK</b>	Black	
<b>S</b>	Industrial Silver	
<b>SS</b>	Stainless Steel (painted)	
<b>PM</b>	Primer	



## QUIET CEILING ADJUSTABLE SQUARE

<b>Item #</b>	
<b>QCT1875</b>	4" 45° adjustable square - MR16 71W max.
<b>QCT1875MH</b>	4" 45° adjustable square - ES16MH
<b>Finish</b>	
<b>WH</b>	White
<b>BK</b>	Black
<b>S</b>	Industrial Silver
<b>SS</b>	Stainless Steel (painted)
<b>PM</b>	Primer

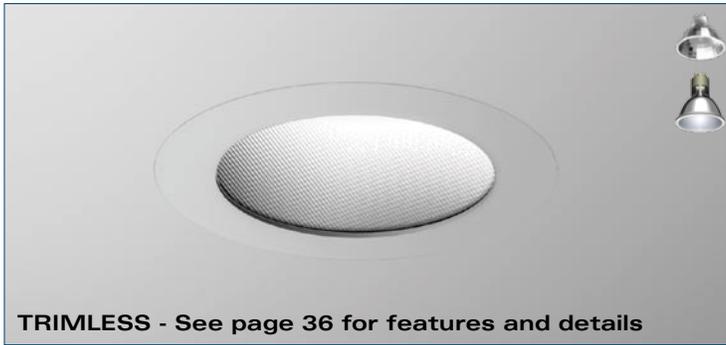


**QUIET CEILING ROUND SHOWERLIGHT**

Item #  
**QCT1976** 4" adjustable round showerlight - MR16 37W max.  
**QCT1976MH** 4" adjustable round showerlight - ES16MH

Finish  
**WH** White  
**BK** Black  
**S** Industrial Silver  
**SS** Stainless Steel (painted)  
**PM** Primer

U.L. Listed for Wet Location

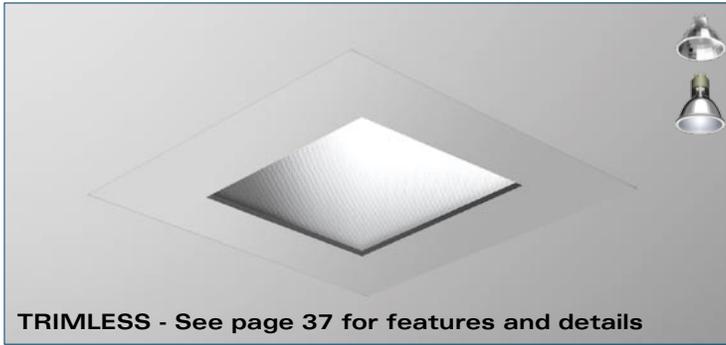

**QUIET CEILING SQUARE SHOWERLIGHT**

Item #  
**QCT1876** 4" adjustable square showerlight - MR16 37W max.  
**QCT1876MH** 4" adjustable square showerlight - ES16MH

Finish  
**WH** White  
**BK** Black  
**S** Industrial Silver  
**SS** Stainless Steel (painted)  
**PM** Primer


U.L. Listed for Wet Location



**QUIET CEILING ROUND WALLWASHER**

Item #  
**QCT2175** 4" lensed round wallwasher - MR16 50W max.  
**QCT2175MH** 4" lensed round wallwasher - ES16MH


Finish  
**WH** White  
**BK** Black  
**S** Industrial Silver  
**SS** Stainless Steel (painted)  
**PM** Primer

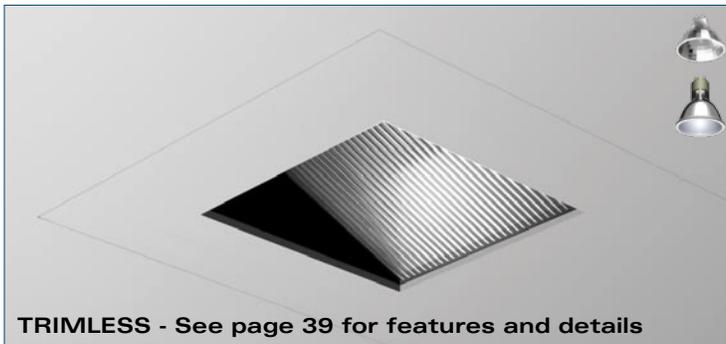

**QUIET CEILING SQUARE WALLWASHER**

Item #  
**QCT2275** 4" lensed square wallwasher - MR16 50W max.  
**QCT2275MH** 4" lensed square wallwasher - ES16MH


Finish  
**WH** White  
**BK** Black  
**S** Industrial Silver  
**SS** Stainless Steel (painted)  
**PM** Primer

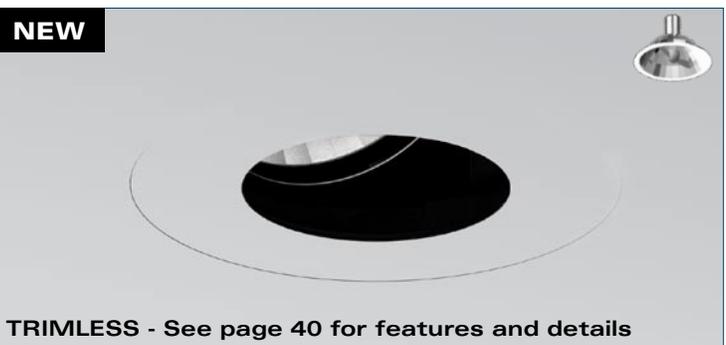


**QUIET CEILING ROUND ADJUSTABLE - AR70**

Item #  
**QCT2375** 4" 35° adjustable round - AR70 50W max.

Finish  
**WH** White  
**BK** Black  
**S** Industrial Silver  
**SS** Stainless Steel (painted)  
**PM** Primer

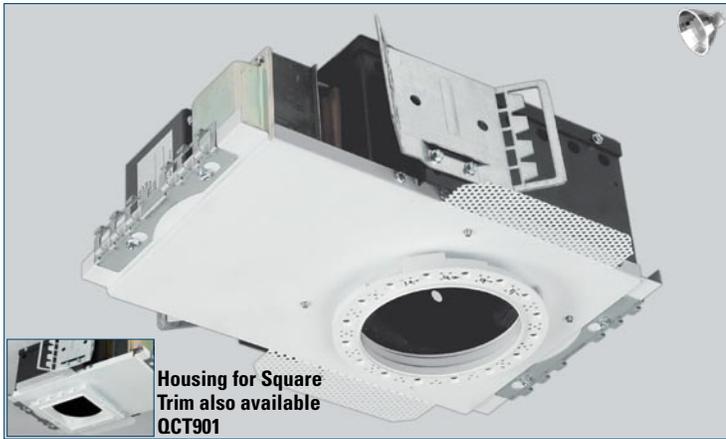

Housing for Square Trim also available QCT901

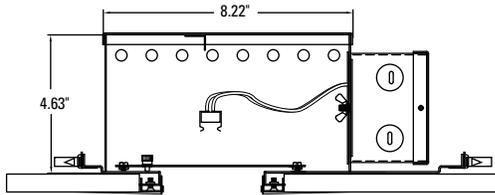


Mudding Ring adjusts in plaster frame to accommodate 1/2", 5/8", 3/4" & 1" ceilings.

**NEW CONSTRUCTION HOUSING DIMENSIONS**

HEIGHT	LENGTH	WIDTH	CEILING CUT-OUT
4.75"	13.75"	9.75"	5.50" (dia or sq)



Housing for Square Trim also available QCT903IC

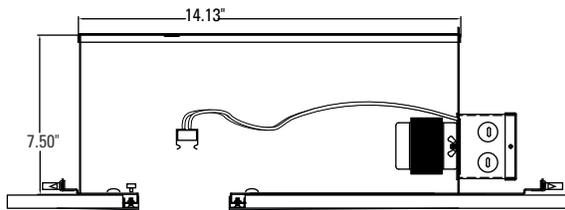

Mudding Ring adjusts in plaster frame to accommodate 1/2", 5/8", 3/4" & 1" ceilings.

**INSULATED CEILING HOUSING DIMENSIONS**

HEIGHT	LENGTH	WIDTH	CEILING CUT-OUT
7.50"	17.13"	10.75"	5.50" (dia or sq)

**QUIET CEILING NEW CONSTRUCTION HOUSING**

Item #

- QCT900** New Construction Housing for Round Trim for 12V MR16 71W max.
- QCT901** New Construction Housing for Square Trim for 12V MR16 71W max.

Voltage

- 120** 120V (Standard)
- 277** 277V

Ordering Example

**QCT900-120**

Quiet Ceiling New Construction housing, 12 volt MR16 lamp 71 watts max., 120 volts

- For new construction applications
- Adjustable mudding ring with ceiling thickness indicators
- Perforated screw-down brackets for secure installation to drywall ceilings
- Housing includes low voltage magnetic transformer and j-box.
- 120V input. U.L. listed for through branch wiring.
- Housing and plaster frame constructed of 18 gauge CRS with durable powder coat finish.
- Thermal protection provided to guard against overheating and misuse of insulation. Vent holes in housing provide cooler operation.
- Sound attenuator on magnetic transformer reduces hum.
- Includes butterfly brackets and adjustable 16 ga. steel hanger bars.

**MAGNETIC TRANSFORMER IS STANDARD. ELECTRONIC AND Q-TRAN TRANSFORMERS ARE AVAILABLE UPON REQUEST.**

**QUIET CEILING INSULATED CEILING HOUSING**

Item #

- QCT902IC** IC Housing for Round Trim 12V MR16 50W max.
- QCT903IC** IC Housing for Square Trim 12V MR16 50W max.

Voltage

- 120** 120V (Standard)
- 277** 277V


Ordering Example

**QCT902IC-120**

Quiet Ceiling Insulated Ceiling housing, 12 volt MR16 lamp 50 watts max., 120 volts


- For new construction applications with insulated ceilings
- Adjustable mudding ring with ceiling thickness indicators
- Perforated screw-down brackets for secure installation to drywall ceilings
- Housing includes low voltage magnetic transformer and j-box.
- 120V input. U.L. listed for through branch wiring.
- Housing and plaster frame constructed of 18 gauge CRS with durable powder coat finish.
- Thermal protection provided.
- Includes adjustable 16 ga. steel hanger bars.
- Sound attenuator on magnetic transformer reduces hum.

**MAGNETIC TRANSFORMER IS STANDARD. ELECTRONIC AND Q-TRAN TRANSFORMERS ARE AVAILABLE UPON REQUEST.**

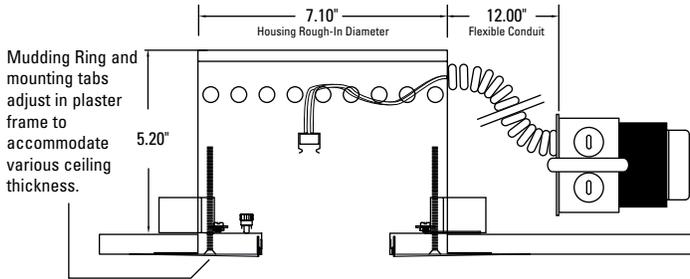

**REMODEL HOUSING DIMENSIONS**

HEIGHT	Diameter 1	Diameter 2	CEILING CUT-OUT
5.20" above ceiling	7.10"	9.00" mesh plate below ceiling	7.10" dia.

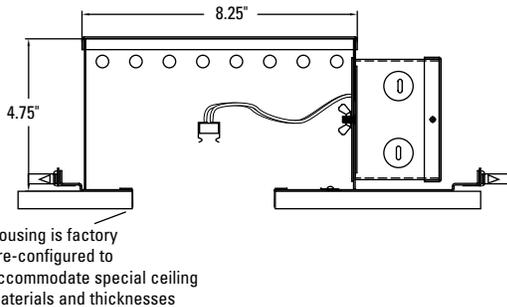

**SPECIAL CEILING HOUSING DIMENSIONS**

HEIGHT	LENGTH	WIDTH	CEILING CUT-OUT
4.75"	13.25"	9.75"	4.141" (dia or sq)

**QUIET CEILING REMODEL HOUSING**

Item #	Description
<b>QCT904RM</b>	Remodel Housing for Round Trim 12V MR16 50W max.
<b>QCT905RM</b>	Remodel Housing for Square Trim 12V MR16 50W max.
<b>Voltage</b>	
<b>120</b>	120V (Standard)
<b>277</b>	277V
<b>Ordering Example</b>	
<b>QCT904RM-120</b>	Quiet Ceiling Remodel housing, 12 volt MR16 lamp 71 watts max., 120 volts

- For remodel applications
- Perforated flap for secure installation to drywall ceilings
- J-box and transformer attached via flexible conduit
- Low voltage magnetic transformer is mounted to junction box and attached to housing via 12" flexible conduit.
- 120V input. U.L. listed for through branch wiring.
- Thermal protection provided to guard against overheating and misuse of insulation.
- Can accommodate up to 1.38" ceiling thickness.
- Sound attenuator on magnetic transformer reduces hum.


**MAGNETIC TRANSFORMER IS STANDARD. ELECTRONIC AND Q-TRAN TRANSFORMERS ARE AVAILABLE UPON REQUEST.**

**QUIET CEILING SPECIAL CEILING HOUSING**

Item #	Description
<b>QCT906SP</b>	Special Ceiling Housing for Round Trim 12V MR16 71W max.
<b>QCT907SP</b>	Special Ceiling Housing for Square Trim 12V MR16 71W max.
<b>Voltage</b>	
<b>120</b>	120V (Standard)
<b>277</b>	277V
<b>Ceiling Thickness Specify</b>	
<b>Ordering Example</b>	
<b>QCT906SP-120-1</b>	Quiet Ceiling Special Ceiling housing, 12 volt MR16 lamp 71 watts max., 120 volts, 1" ceiling thickness

- Suitable for special non-drywall ceiling types such as wood, marble, etc...
- Aperture ring depth is factory configured to accommodate specified ceiling thickness
- Housing requires precise 4.141" diameter ceiling cut-out for round trim or 4.141" x 4.141" ceiling cut-out for square trim
- Housing includes low voltage magnetic transformer and j-box.
- 120V input. U.L. listed for through branch wiring.
- Thermal protection provided to guard against overheating and misuse of insulation. Vent holes in housing provide cooler operation.
- Sound attenuator on magnetic transformer reduces hum.
- Includes butterfly brackets and adjustable 16 ga. steel hanger bars.

**MAGNETIC TRANSFORMER IS STANDARD. ELECTRONIC AND Q-TRAN TRANSFORMERS ARE AVAILABLE UPON REQUEST.**

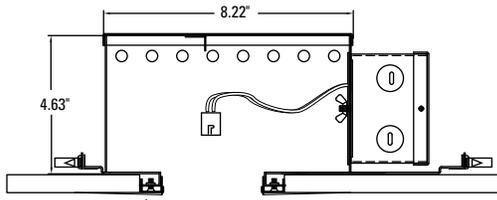

Mudding Ring adjusts in plaster frame to accommodate 1/2", 5/8", 3/4" & 1" ceilings.

Includes bayonet base socket for AR70 lamp.

**NEW CONSTRUCTION HOUSING DIMENSIONS**

HEIGHT	LENGTH	WIDTH	CEILING CUT-OUT
4.75"	13.75"	9.75"	5.50" dia.

**QUIET CEILING NEW CONSTRUCTION HOUSING**


Item # **QCT960** New Construction Housing for Round Trim for 12V AR70 50W max.

Voltage **120** 120V (Standard)  
**277** 277V

Ordering Example **QCT960-120**  
Quiet Ceiling New Construction housing, 12 volt AR70 lamp 50 watts max., 120 volts

- For new construction applications
- Adjustable mudding ring with ceiling thickness indicators
- Perforated screw-down brackets for secure installation to drywall ceilings
- Housing includes low voltage magnetic transformer and j-box.
- 120V input. U.L. listed for through branch wiring.
- Housing and plaster frame constructed of 18 gauge CRS with durable powder coat finish.
- Thermal protection provided to guard against overheating and misuse of insulation. Vent holes in housing provide cooler operation.
- Sound attenuator on magnetic transformer reduces hum.
- Includes butterfly brackets and adjustable 16 ga. steel hanger bars.

**MAGNETIC TRANSFORMER IS STANDARD. ELECTRONIC AND Q-TRAN TRANSFORMERS ARE AVAILABLE UPON REQUEST.**

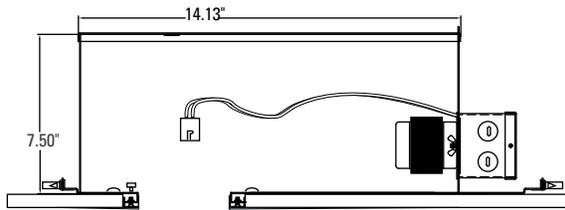

Mudding Ring adjusts in plaster frame to accommodate 1/2", 5/8", 3/4" & 1" ceilings.

Includes bayonet base socket for AR70 lamp.

**INSULATED CEILING HOUSING DIMENSIONS**

HEIGHT	LENGTH	WIDTH	CEILING CUT-OUT
7.50"	17.13"	10.75"	5.50" dia.

**QUIET CEILING INSULATED CEILING HOUSING**

Item # **QCT962IC** IC Housing for Round Trim 12V AR70 50W max.

Voltage **120** 120V (Standard)  
**277** 277V

Ordering Example **QCT962IC-120**  
Quiet Ceiling Insulated Ceiling housing, 12 volt AR70 lamp 50 watts max., 120 volts

- For new construction applications with insulated ceilings
- Adjustable mudding ring with ceiling thickness indicators
- Perforated screw-down brackets for secure installation to drywall ceilings
- Housing includes low voltage magnetic transformer and j-box.
- 120V input. U.L. listed for through branch wiring.
- Housing and plaster frame constructed of 18 gauge CRS with durable powder coat finish.
- Thermal protection.
- Includes adjustable 16 ga. steel hanger bars.
- Sound attenuator on magnetic transformer reduces hum.

**MAGNETIC TRANSFORMER IS STANDARD. ELECTRONIC AND Q-TRAN TRANSFORMERS ARE AVAILABLE UPON REQUEST.**



### QUIET CEILING REMODEL HOUSING


**Item #**  
**QCT964RM** Remodel Housing for Round Trim  
 12V AR70 50W max.

**Voltage**  
**120** 120V (Standard)  
**277** 277V

**Ordering Example**  
**QCT964RM-120**  
 Quiet Ceiling Remodel housing, 12 volt AR70 lamp 50 watts max., 120 volts


- For remodel applications
- Perforated flap for secure installation to drywall ceilings
- J-box and transformer attached via flexible conduit
- Low voltage magnetic transformer is mounted to junction box and attached to housing via 12" flexible conduit.
- 120V input. U.L. listed for through branch wiring.
- Thermal protection provided to guard against overheating and misuse of insulation.
- Can accommodate up to 1.38" ceiling thickness.
- Sound attenuator on magnetic transformer reduces hum.

**MAGNETIC TRANSFORMER IS STANDARD. ELECTRONIC AND Q-TRAN TRANSFORMERS ARE AVAILABLE UPON REQUEST.**

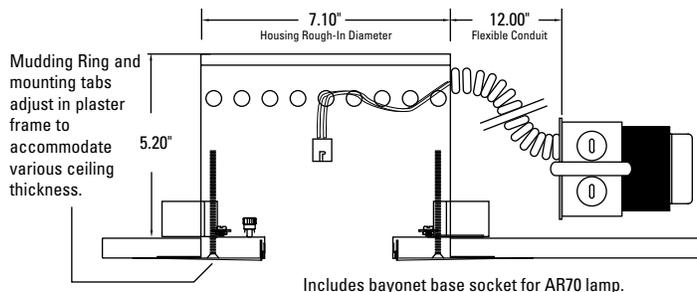

#### REMODEL HOUSING DIMENSIONS

HEIGHT	Diameter 1	Diameter 2	CEILING CUT-OUT
5.20" above ceiling	7.10"	9.00" mesh plate below ceiling	7.10" dia.

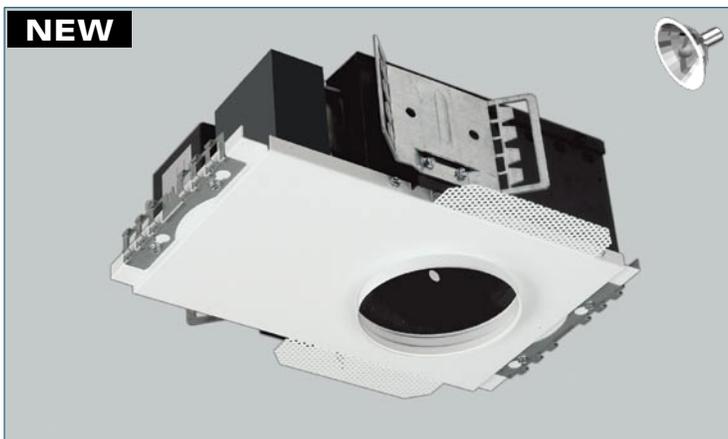

### QUIET CEILING SPECIAL CEILING HOUSING

**Item #**  
**QCT966SP** Special Ceiling Housing for Round Trim  
 12V AR70 50W max.


**Voltage**  
**120** 120V (Standard)  
**277** 277V

**Ceiling Thickness Specify** \_\_\_\_\_

**Ordering Example**  
**QCT966SP-120-1**  
 Quiet Ceiling Special Ceiling housing, 12 volt AR70 lamp 50 watts max., 120 volts, 1" ceiling thickness

- Suitable for special non-drywall ceiling types such as wood, marble, etc...
- Aperture ring depth is factory configured to accommodate specified ceiling thickness
- Housing requires precise 4.141" diameter ceiling cut-out
- Housing includes low voltage magnetic transformer and j-box.
- 120V input. U.L. listed for through branch wiring.
- Thermal protection provided to guard against overheating and misuse of insulation. Vent holes in housing provide cooler operation.
- Sound attenuator on magnetic transformer reduces hum.
- Includes butterfly brackets and adjustable 16 ga. steel hanger bars.

**MAGNETIC TRANSFORMER IS STANDARD. ELECTRONIC AND Q-TRAN TRANSFORMERS ARE AVAILABLE UPON REQUEST.**

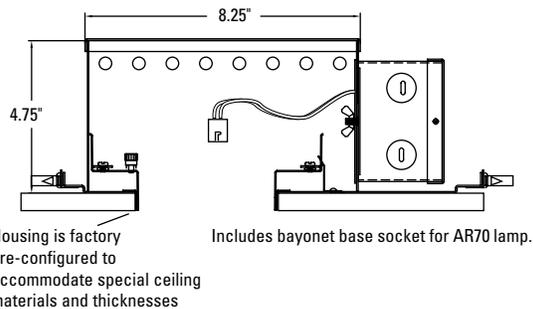


#### SPECIAL CEILING HOUSING DIMENSIONS


HEIGHT	LENGTH	WIDTH	CEILING CUT-OUT
4.75"	13.25"	9.75"	4.141" dia.

# QUIET CEILING - ES16MH BRITESPOT® METAL HALIDE LAMP

QUIET CEILING HOUSINGS for ES16MH

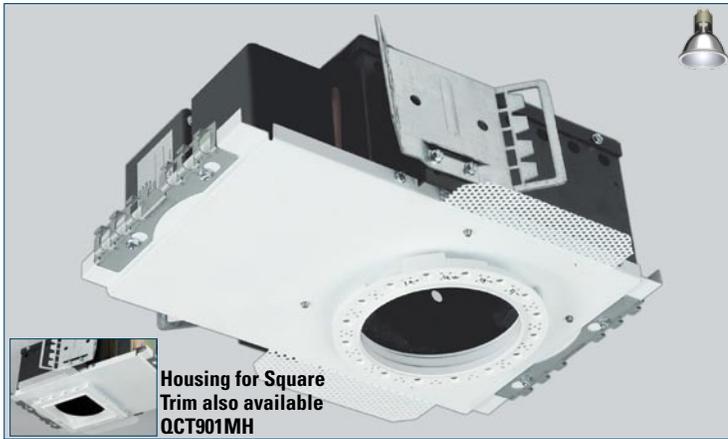

Housing for Square Trim also available OCT901MH

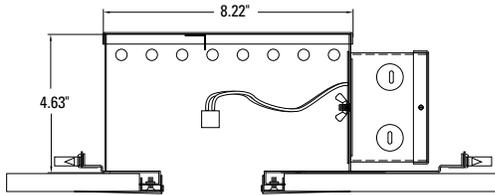

Mudding Ring adjusts in plaster frame to accommodate 1/2", 5/8", 3/4" & 1" ceilings.

• Configured with integral electronic metal halide ballasts

### NEW CONSTRUCTION HOUSING DIMENSIONS

HEIGHT	LENGTH	WIDTH	CEILING CUT-OUT
4.75"	13.75"	9.75"	5.50" (dia or sq)

### QUIET CEILING NEW CONSTRUCTION HOUSING

Item #

**OCT900MH** New Construction Housing for Round Trim - for ES16MH Lamp

**OCT901MH** New Construction Housing for Square Trim - for ES16MH Lamp

Wattage

**20** 20 Watt ES16 Metal Halide

**39** 39 Watt ES16 Metal Halide

Voltage

**120** 120V (Standard)

**277** 277V

Ordering Example


**OCT900MH-39-120**

Quiet Ceiling new construction housing, Ballast for 39 Watt ES16 metal halide lamp, 120 volts

- For new construction applications
- Adjustable mudding ring with ceiling thickness indicators
- Perforated screw-down brackets for secure installation to drywall ceilings
- Housing includes metal halide ballast and junction box.
- 120V input. U.L. listed for through branch wiring.
- Housing and plaster frame constructed of 18 gauge CRS with durable powder coat finish.
- Thermal protection provided to guard against overheating and misuse of insulation. Vent holes in housing provide cooler operation.
- Includes butterfly brackets and adjustable 16 ga. steel hanger bars.



Housing for Square Trim also available OCT903ICMH

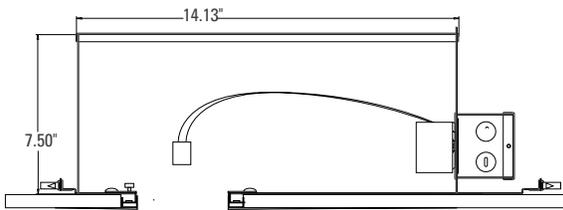

Mudding Ring adjusts in plaster frame to accommodate 1/2", 5/8", 3/4" & 1" ceilings.

• Configured with integral electronic metal halide ballasts

### INSULATED CEILING HOUSING DIMENSIONS

HEIGHT	LENGTH	WIDTH	CEILING CUT-OUT
7.50"	17.13"	10.75"	5.50" (dia or sq)

### QUIET CEILING INSULATED CEILING HOUSING

Item #

**OCT902ICMH** IC Housing for Round Trim - for ES16MH Lamp

**OCT903ICMH** IC Housing for Square Trim - for ES16MH Lamp

Wattage

**20** 20 Watt ES16 Metal Halide

**39** 39 Watt ES16 Metal Halide

Voltage

**120** 120V (Standard)

**277** 277V

Ordering Example


**OCT902ICMH-39-120**

Quiet Ceiling Insulated Ceiling housing, Ballast for 39 Watt ES16 metal halide lamp, 120 volts

- For new construction applications with insulated ceilings
- Adjustable mudding ring with ceiling thickness indicators
- Perforated screw-down brackets for secure installation to drywall ceilings
- Housing includes metal halide ballast and junction box.
- 120V input. U.L. listed for through branch wiring.
- Housing and plaster frame constructed of 18 gauge CRS with durable powder coat finish.
- Thermal protection provided.
- Includes adjustable 16 ga. steel hanger bars.



**Housing for Square Trim also available QCT905RMMH**

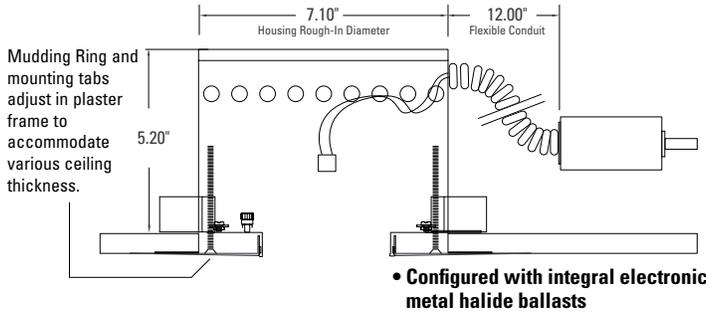


### REMODEL HOUSING DIMENSIONS

HEIGHT	Diameter 1	Diameter 2	CEILING CUT-OUT
5.20" above ceiling	7.10"	9.00" mesh plate below ceiling	7.10" dia.



**Housing for Square Trim also available QCT907SPMH**

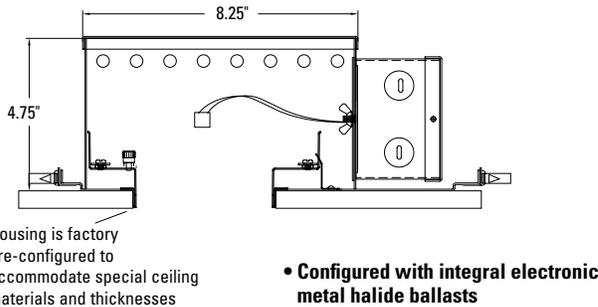

### SPECIAL CEILING HOUSING DIMENSIONS

HEIGHT	LENGTH	WIDTH	CEILING CUT-OUT
4.75"	13.25"	9.75"	4.141" (dia or sq)

### QUIET CEILING REMODEL HOUSING

Item #	Description
<b>QCT904RMMH</b>	Remodel Housing for Round Trim - for ES16MH Lamp
<b>QCT905RMMH</b>	Remodel Housing for Square Trim - for ES16MH Lamp
Wattage	
<b>20</b>	20 Watt ES16 Metal Halide
<b>39</b>	39 Watt ES16 Metal Halide
Voltage	
<b>120</b>	120V (Standard)
<b>277</b>	277V

### Ordering Example

#### QCT904RMMH-39-120

Quiet Ceiling Remodel housing, Ballast for 39 Watt ES16 metal halide lamp, 120 volts

- For remodel applications
- Perforated flap for secure installation to drywall ceilings
- Electronic metal halide ballast is mounted to junction box and attached to housing via 12" flexible conduit.
- 120V input. U.L. listed for through branch wiring.
- Thermal protection provided to guard against overheating and misuse of insulation.
- Can accommodate up to 1.38" ceiling thickness.

### QUIET CEILING SPECIAL CEILING HOUSING

Item #	Description
<b>QCT906SPMH</b>	Special Ceiling Housing for Round Trim - for ES16MH Lamp
<b>QCT907SPMH</b>	Special Ceiling Housing for Round Trim - for ES16MH Lamp
Wattage	
<b>20</b>	20 Watt ES16 Metal Halide
<b>39</b>	39 Watt ES16 Metal Halide
Voltage	
<b>120</b>	120V (Standard)
<b>277</b>	277V

### Ceiling Thickness Specify

### Ordering Example

#### QCT906SPMH-39-120-1


Quiet Ceiling Special Ceiling housing, Ballast for 39 Watt ES16 metal halide lamp, 120 volts, 1" ceiling thickness

- Suitable for special non-drywall ceiling types such as wood, marble, etc...
- Aperture ring depth is factory configured to accommodate specified ceiling thickness.
- Housing requires precise 4.141" diameter ceiling cut-out for round trim or 4.141" x 4.141" ceiling cut-out for square trim
- Housing includes metal halide ballast and junction box.
- 120V input. U.L. listed for through branch wiring.
- Thermal protection provided to guard against overheating and misuse of insulation. Vent holes in housing provide cooler operation.
- Includes butterfly brackets and adjustable 16 ga. steel hanger bars.



## QUIET CEILING - SLOT APERTURE

Item #		
<b>QCT1675</b>	4" 45° adjustable slot aperture - MR16 71W max.	
<b>QCT1675MH</b>	4" 45° adjustable slot aperture - ES16MH	
Finish		
<b>WH</b>	White	
<b>BK</b>	Black	
<b>S</b>	Industrial Silver	
<b>SS</b>	Stainless Steel (painted)	
<b>PM</b>	Primer	

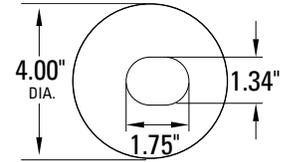

### Features

- 1) Locking alignment plate provides 360° rotational adjustment and ensures original orientation of trim even after re-lamping.
- 2) 45° locking rack-and-pinion angle adjustment mechanism with hot aiming feature.
- 3) Can accommodate up to 3 optical accessories.
- 4) Bullet plunger retainers provide smooth snap-in action for installation and removal of trim for re-lamping. Helps guard against plaster cracking.
- 5) Flat black powder coated internal finish reduces visibility of components from below the ceiling.
- 6) "POSI-GRIP" bi-pin lamp socket for firm, mechanical lamp connection. (included with MR16 housings)
- 7) Includes steel safety cable

### QUIET CEILING HOUSINGS



**QCT900 - (MR16)**  
**QCT900MH - (ES16MH)**  
NEW CONSTRUCTION

see page 24-29 for details



**QCT902IC - (MR16)**  
**QCT902ICMH - (ES16MH)**  
INSULATED CEILING

see page 24-29 for details



**QCT904RM - (MR16)**  
**QCT904RMMH - (ES16MH)**  
REMODEL


see page 24-29 for details



**QCT906SP - (MR16)**  
**QCT906SP - (ES16MH)**  
SPECIAL CEILING  
(wood, marble, etc...)

see page 24-29 for details

• Hot Aiming enables the lamp to be adjusted with an ordinary phillips screw-driver while the power is on.

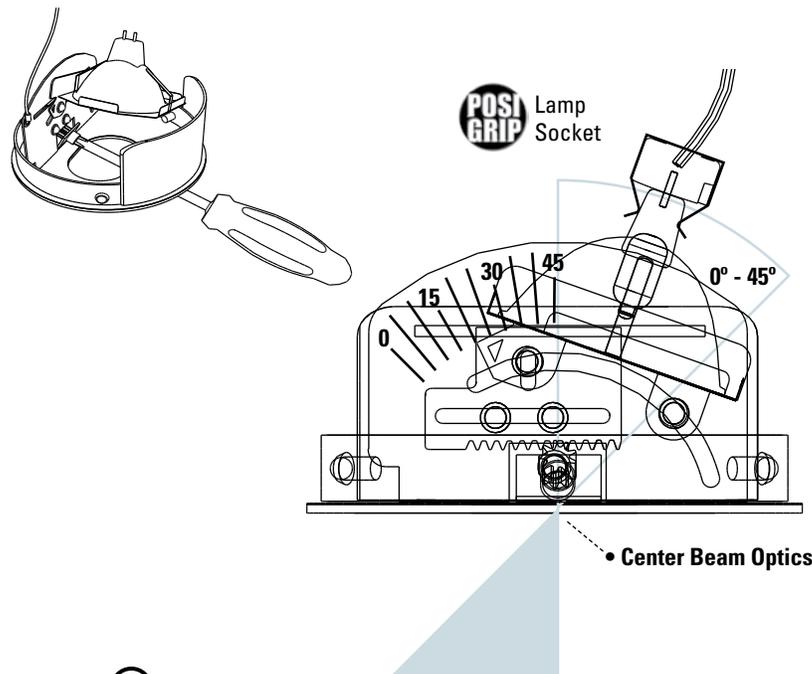




QUIET CEILING - PINHOLE

Item #	
<b>QCT1775</b>	4" 45° adjustable pinhole - MR16 71W max.
<b>QCT1775MH</b>	4" 45° adjustable pinhole - ES16MH

Finish

<b>WH</b>	White
<b>BK</b>	Black
<b>S</b>	Industrial Silver
<b>SS</b>	Stainless Steel (painted)
<b>PM</b>	Primer

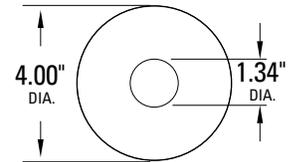

Features

- 1) Locking alignment plate provides 360° rotational adjustment and ensures original orientation of trim even after re-lamping.
- 2) 45° locking rack-and-pinion angle adjustment mechanism with hot aiming feature.
- 3) Can accommodate up to 3 optical accessories.
- 4) Bullet plunger retainers provide smooth snap-in action for installation and removal of trim for re-lamping. Helps guard against plaster cracking.
- 5) Flat black powder coated internal finish reduces visibility of components from below the ceiling.
- 6) "POSI-GRIP" bi-pin lamp socket for firm, mechanical lamp connection. (included with MR16 housings)
- 7) Includes steel safety cable

QUIET CEILING HOUSINGS



**QCT900 - (MR16)**  
**QCT900MH - (ES16MH)**  
NEW CONSTRUCTION

see page 24-29 for details



**QCT902IC - (MR16)**  
**QCT902ICMH - (ES16MH)**  
INSULATED CEILING

see page 24-29 for details



**QCT904RM - (MR16)**  
**QCT904RMMH - (ES16MH)**  
REMODEL


see page 24-29 for details



**QCT906SP - (MR16)**  
**QCT906SP - (ES16MH)**  
SPECIAL CEILING  
(wood, marble, etc...)

24-29 for details

• Hot Aiming enables the lamp to be adjusted with an ordinary phillips screw-driver while the power is on.

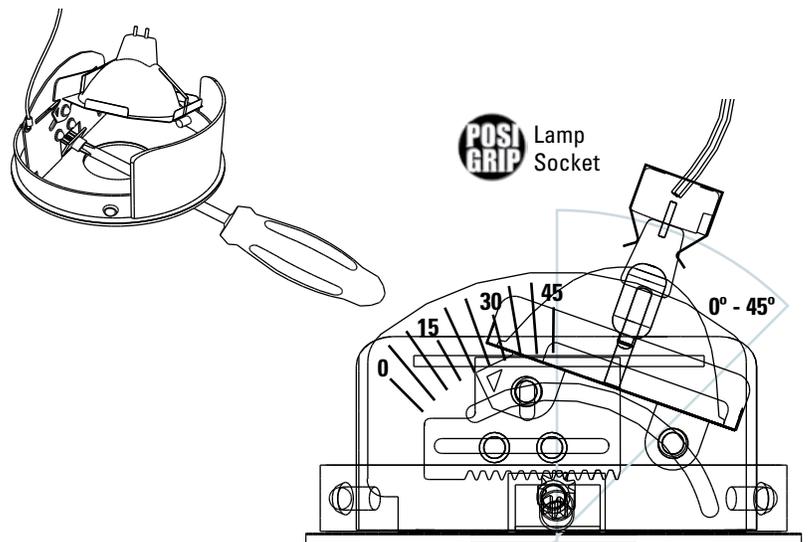




QUIET CEILING - DOWNLIGHT

Item #  
**QCT1975** 4" 15° adjustable downlight - MR16 71W max.  
**QCT1975MH** 4" 15° adjustable downlight - ES16MH


Finish	
<b>WH</b>	White
<b>BK</b>	Black
<b>S</b>	Industrial Silver
<b>SS</b>	Stainless Steel (painted)
<b>PM</b>	Primer

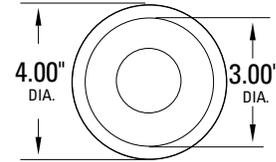

Features

- 1) Locking alignment plate provides 360° rotational adjustment and ensures original orientation of trim even after re-lamping.
- 2) Locking adjustment knob with angle indicators allows +/- 15° adjustability
- 3) Clear Alzak® reflector
- 4) Can accommodate up to 3 optical accessories.
- 5) Bullet plunger retainers provide smooth snap-in action for installation and removal of trim for re-lamping. Helps guard against plaster cracking.
- 6) Flat black powder coated internal finish reduces visibility of components from below the ceiling.
- 7) "POSI-GRIP" bi-pin lamp socket for firm, mechanical lamp connection. (included with MR16 housings)
- 8) Includes steel safety cable

QUIET CEILING HOUSINGS

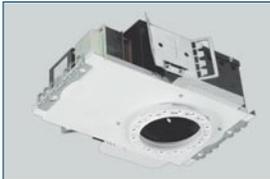

**QCT900 - (MR16)**  
**QCT900MH - (ES16MH)**  
 NEW CONSTRUCTION

see page 24-29 for details



**QCT902IC - (MR16)**  
**QCT902ICMH - (ES16MH)**  
 INSULATED CEILING

see page 24-29 for details




**QCT904RM - (MR16)**  
**QCT904RMMH - (ES16MH)**  
 REMODEL

see page 24-29 for details



**QCT906SP - (MR16)**  
**QCT906SP - (ES16MH)**  
 SPECIAL CEILING  
 (wood, marble, etc...)

see page 24-29 for details

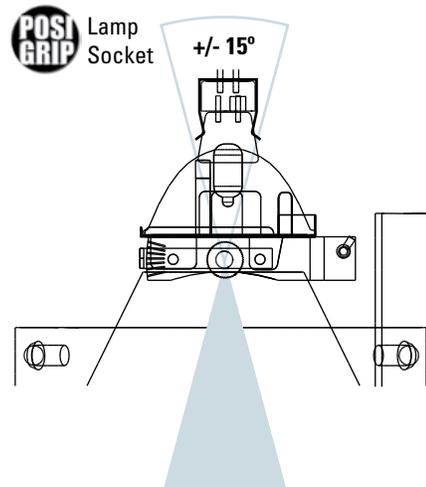




## QUIET CEILING - TRUNCATED CONE

Item #	
<b>QCT2075</b>	4" adjustable truncated cone - MR16 71W max.
<b>QCT2075MH</b>	4" adjustable truncated cone - ES16MH

### Finish

<b>WH</b>	White
<b>BK</b>	Black
<b>S</b>	Industrial Silver
<b>SS</b>	Stainless Steel (painted)
<b>PM</b>	Primer

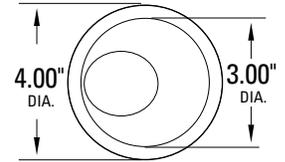

### Features

- 1) Locking alignment plate provides 360° rotational adjustment and ensures original orientation of trim even after re-lamping
- 2) Locking adjustment knob with angle indicators allows +/- 15° adjustability
- 3) Etched aluminum reflector is cut at a 35° angle.
- 4) Can accommodate up to 3 optical accessories.
- 5) Bullet plunger retainers provide smooth snap-in action for installation and removal of trim for re-lamping. Helps guard against plaster cracking.
- 6) Flat black powder coated internal finish reduces visibility of components from below the ceiling.
- 7) "POSI-GRIP" bi-pin lamp socket for firm, mechanical lamp connection. (included with MR16 housings)
- 8) Includes steel safety cable

### QUIET CEILING HOUSINGS



**QCT900 - (MR16)**  
**QCT900MH - (ES16MH)**  
NEW CONSTRUCTION

see page 24-29 for details



**QCT902IC - (MR16)**  
**QCT902ICMH - (ES16MH)**  
INSULATED CEILING

see page 24-29 for details




**QCT904RM - (MR16)**  
**QCT904RMMH - (ES16MH)**  
REMODEL

see page 24-29 for details




**QCT906SP - (MR16)**  
**QCT906SP - (ES16MH)**  
SPECIAL CEILING  
(wood, marble, etc...)

see page 24-29 for details

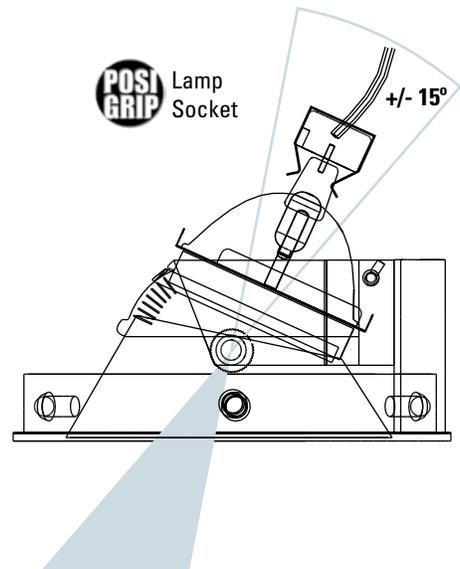

# QUIET CEILING - ADJUSTABLE SQUARE



QUIET CEILING - ADJUSTABLE SQUARE

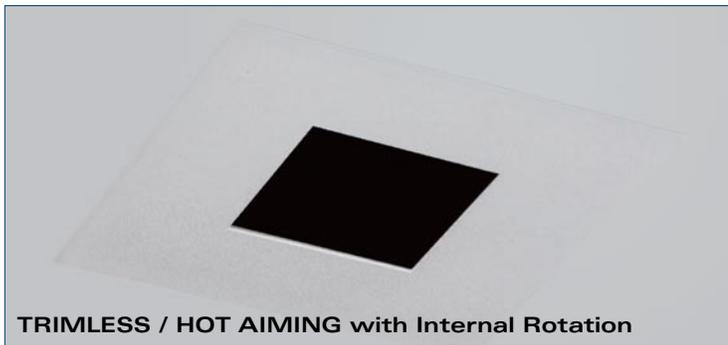

## QUIET CEILING - ADJUSTABLE SQUARE

Item #  
**QCT1875** 4" 45° adjustable square - MR16 71W max.  
**QCT1875MH** 4" 45° adjustable square - ES16MH

Finish  
**WH** White  
**BK** Black  
**S** Industrial Silver  
**SS** Stainless Steel (painted)  
**PM** Primer

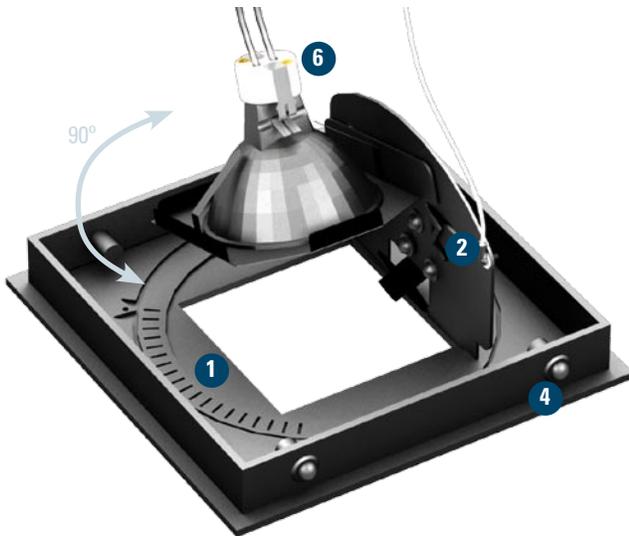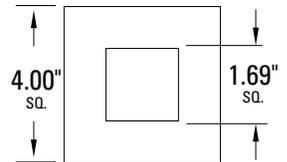

### Features

- 1)
- 2) 45° locking rack-and-pinion angle adjustment mechanism with hot aiming feature.
- 3) Can accommodate up to 3 optical accessories.
- 4) Bullet plunger retainers provide smooth snap-in action for installation and removal of trim for re-lamping. Helps guard against plaster cracking.
- 5) Flat black powder coated internal finish reduces visibility of components from below the ceiling.
- 6) "POSI-GRIP" bi-pin lamp socket for firm, mechanical lamp connection. (included with MR16 housings)
- 7) Includes steel safety cable

### QUIET CEILING HOUSINGS



**QCT901 - MR16**  
**QCT901MH - ES16MH**

NEW CONSTRUCTION  
 see page 24-29 for details



**QCT903IC - MR16**  
**QCT903ICMH - ES16MH**

INSULATED CEILING  
 see page 24-29 for details




**QCT905RM - MR16**  
**QCT905RMMH - ES16MH**

REMODEL  
 see page 24-29 for details




**QCT907SP - MR16**  
**QCT907SPMH - ES16MH**

SPECIAL CEILING  
 (wood, marble, etc...)  
 see page 24-29 for details

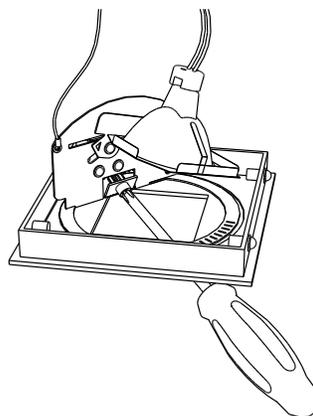

• Hot Aiming enables the lamp to be adjusted with an ordinary phillips screwdriver while the power is on.

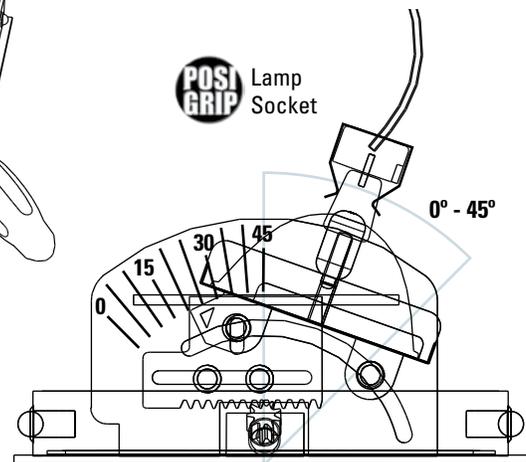

• Center Beam Optics



# QUIET CEILING - ROUND SHOWERLIGHT

QUIET CEILING - ROUND SHOWERLIGHT




## QUIET CEILING - ROUND SHOWERLIGHT

Item #	
<b>QCT1976</b>	4" adjustable round showerlight - MR16 37W max.
<b>QCT1976MH</b>	4" adjustable round showerlight - ES16MH

### Finish

<b>WH</b>	White
<b>BK</b>	Black
<b>S</b>	Industrial Silver
<b>SS</b>	Stainless Steel (painted)
<b>PM</b>	Primer

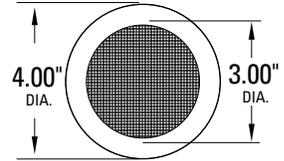

### Features

- 1) Solite™ soft focus lens for even distribution of light.
- 2) Lens is gasketed for 100% moisture seal.
- 3) Bullet plunger retainers provide smooth snap-in action for installation and removal of trim for re-lamping. Helps guard against plaster cracking.
- 4) Locking alignment plate provides 360° rotational adjustment and ensures original orientation of trim even after re-lamping.
- 5) Locking adjustment knob with angle indicators.
- 6) Flat black powder coated internal finish reduces visibility of components from below the ceiling.
- 7) "POSI-GRIP" bi-pin lamp socket for firm, mechanical lamp connection. (included with MR16 housings)

### QUIET CEILING HOUSINGS



**QCT900 - (MR16)**  
**QCT900MH - (ES16MH)**  
NEW CONSTRUCTION

see page 24-29 for details



**QCT902IC - (MR16)**  
**QCT902ICMH - (ES16MH)**  
INSULATED CEILING

see page 24-29 for details



**QCT904RM - (MR16)**  
**QCT904RMMH - (ES16MH)**  
REMODEL

see page 24-29 for details



**QCT906SP - (MR16)**  
**QCT906SP - (ES16MH)**  
SPECIAL CEILING  
(wood, marble, etc...)

see page 24-29 for details

### EASY TRIM REMOVAL




Trim removal for relamping is easily achieved by pressing up on the lens.



The gasket seal will temporarily separate to allow leverage.



Simply grab the trim and pull downward. Lens snaps back in to place.

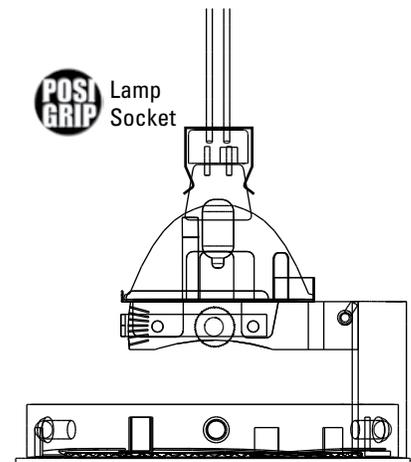




## QUIET CEILING - SQUARE SHOWERLIGHT

Item #	
<b>QCT1876</b>	4" adjustable square showerlight - MR16 37W max.
<b>QCT1876MH</b>	4" adjustable square showerlight - ES16MH


### Finish

<b>WH</b>	White
<b>BK</b>	Black
<b>S</b>	Industrial Silver
<b>SS</b>	Stainless Steel (painted)
<b>PM</b>	Primer

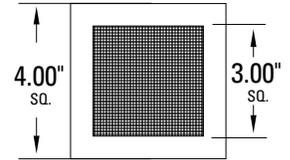

## Features

- 1) Solite™ soft focus lens for even distribution of light.
- 2) Lens is gasketed for 100% moisture seal.
- 3) Bullet plunger retainers provide smooth snap-in action for installation and removal of trim for re-lamping. Helps guard against plaster cracking.
- 4) Locking adjustment knob with angle indicators.
- 5) Flat black powder coated internal finish reduces visibility of components from below the ceiling.
- 6) "POSI-GRIP" bi-pin lamp socket for firm, mechanical lamp connection. (included with MR16 housings)
- 7) Includes steel safety cable.

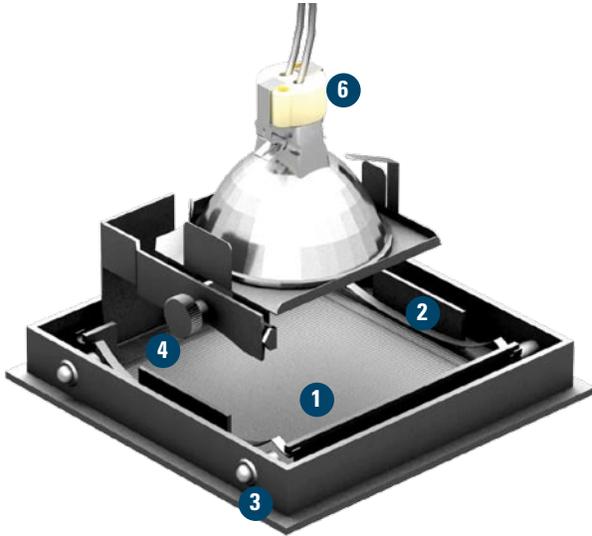

## QUIET CEILING HOUSINGS



**QCT901 - MR16**  
**QCT901MH - ES16MH**  
NEW CONSTRUCTION

see page 24-29 for details



**QCT903IC - MR16**  
**QCT903ICMH - ES16MH**  
INSULATED CEILING

see page 24-29 for details



**QCT905RM - MR16**  
**QCT905RMMH - ES16MH**  
REMODEL

see page 24-29 for details



**QCT907SP - MR16**  
**QCT907SPMH - ES16MH**  
SPECIAL CEILING  
(wood, marble, etc...)

see page 24-29 for details

## EASY TRIM REMOVAL




Trim removal for relamping is easily achieved by pressing up on the lens.



The gasket seal will temporarily separate to allow leverage.




Simply grab the trim and pull downward. Lens snaps back in to place.

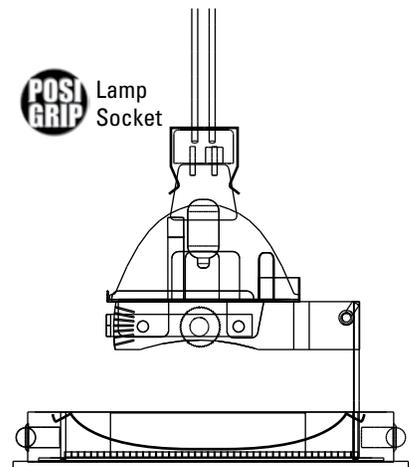

# QUIET CEILING - ROUND WALLWASHER

QUIET CEILING - ROUND WALLWASH

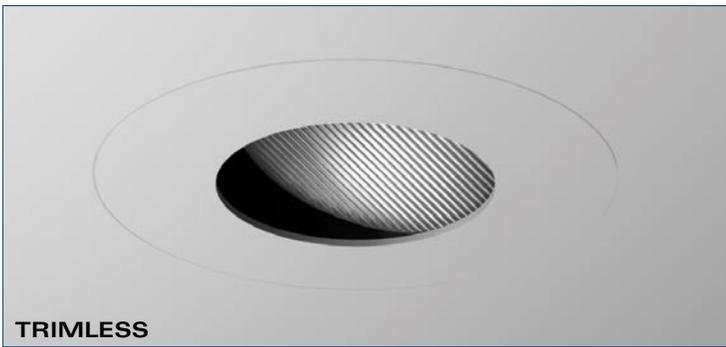

## QUIET CEILING - ROUND WALLWASH

Item #

**QCT2175** 4" round wallwash - MR16 50W max.

**QCT2175MH** 4" round wallwash - ES16MH

Finish


**WH** White

**BK** Black

**S** Industrial Silver

**SS** Stainless Steel (painted)

**PM** Primer

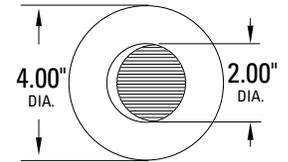

### Features

- 1) Clear Alzak® "kicker" reflector provides enhanced light output.
- 2) Locking alignment plate provides 360° rotational adjustment and ensures original orientation of trim even after re-lamping.
- 3) Bullet plunger retainers provide smooth snap-in action for installation and removal of trim for re-lamping. Helps guard against plaster cracking.
- 4) Flat black powder coated internal finish reduces visibility of components from below the ceiling.
- 5) Includes steel safety cable.
- 6) "POSI-GRIP" bi-pin lamp socket for firm, mechanical lamp connection. (included with MR16 housings)
- 7) Frosted linear spread lens provides a wider distribution of light.

### QUIET CEILING HOUSINGS



**QCT900 - (MR16)**  
**QCT900MH - (ES16MH)**  
NEW CONSTRUCTION

see page 24-29 for details



**QCT902IC - (MR16)**  
**QCT902ICMH - (ES16MH)**  
INSULATED CEILING

see page 24-29 for details




**QCT904RM - (MR16)**  
**QCT904RMMH - (ES16MH)**  
REMODEL


see page 24-29 for details



**QCT906SP - (MR16)**  
**QCT906SP - (ES16MH)**  
SPECIAL CEILING  
(wood, marble, etc...)

see page 24-29 for details

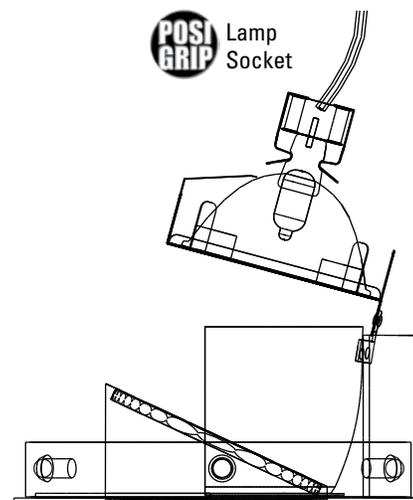


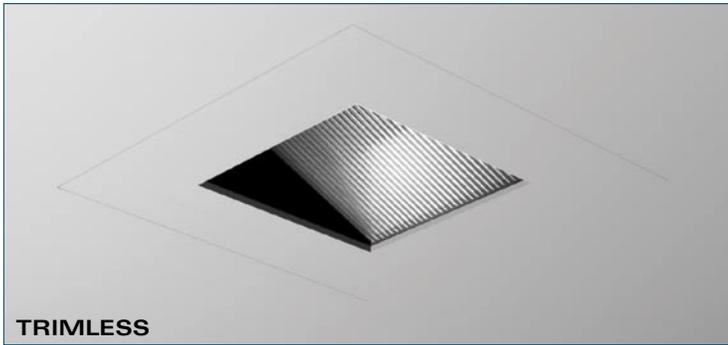

## QUIET CEILING - SQUARE WALLWASH


Item #	
<b>QCT2275</b>	4" square wallwash - MR16 50W max.
<b>QCT2275MH</b>	4" square wallwash - ES16MH

Finish	
<b>WH</b>	White
<b>BK</b>	Black
<b>S</b>	Industrial Silver
<b>SS</b>	Stainless Steel (painted)
<b>PM</b>	Primer

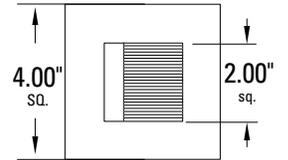

## Features

- 1) Clear Alzak® "kicker" reflector provides enhanced light output.
- 2) Bullet plunger retainers provide smooth snap-in action for installation and removal of trim for re-lamping. Helps guard against plaster cracking.
- 3) Flat black powder coated internal finish reduces visibility of components from below the ceiling.
- 4) Includes steel safety cable.
- 5) "POSI-GRIP" bi-pin lamp socket for firm, mechanical lamp connection. (included with MR16 housings)
- 6) Frosted linear spread lens provides a wider distribution of light.

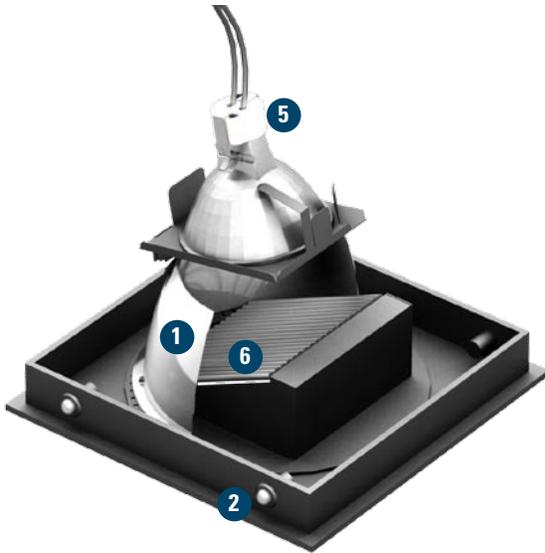

## QUIET CEILING HOUSINGS



**QCT901 - MR16**  
**QCT901MH - ES16MH**

NEW CONSTRUCTION

see page 24-29 for details



**QCT903IC - MR16**  
**QCT903ICMH - ES16MH**  
INSULATED CEILING

see page 24-29 for details




**QCT905RM - MR16**  
**QCT905RMMH - ES16MH**  
REMODEL


see page 24-29 for details



**QCT907SP - MR16**  
**QCT907SPMH - ES16MH**  
SPECIAL CEILING  
(wood, marble, etc...)

see page 24-29 for details

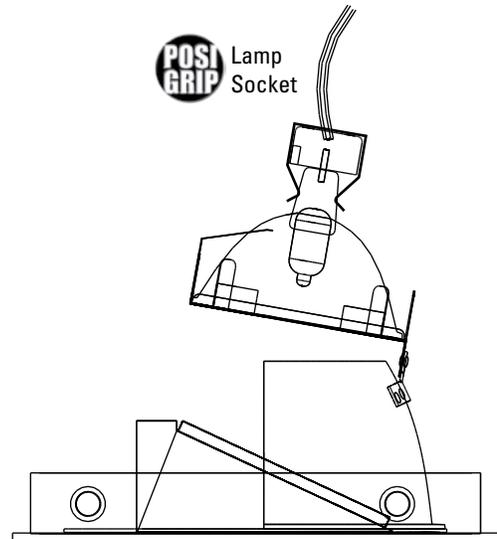


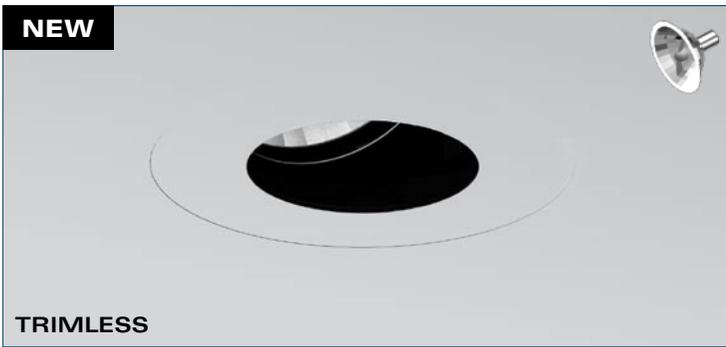

QUIET CEILING - ROUND ADJUSTABLE

Item # **QCT2375** 4" 35° round adjustable - AR70 50W max.

Finish  
**WH** White  
**BK** Black  
**S** Industrial Silver  
**SS** Stainless Steel (painted)  
**PM** Primer

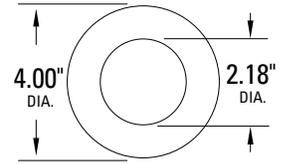

Features

- 1) Locking alignment plate provides 360° rotational adjustment and ensures original orientation of trim even after re-lamping
- 2) Accommodates one (1) optical accessory. Lens tray allows optical accessory to be replaced without removing the lamp from the trim.
- 3) 35° angle adjustment mechanism.
- 4) Bullet plunger retainers provide smooth snap-in action for installation and removal of trim for re-lamping. Helps guard against plaster cracking.
- 5) Flat black powder coated internal finish reduces visibility of components from below the ceiling.
- 6) For use with AR70 double contact lamp. Housing includes bayonet socket.
- 7) Includes steel safety cable

QUIET CEILING HOUSINGS



**QCT960 - (AR70)**  
 NEW CONSTRUCTION  
 see page 26-27 for details




**QCT962IC - (AR70)**  
 INSULATED CEILING  
 see page 26-27 for details



**QCT964RM - (AR70)**  
 REMODEL  
 see page 26-27 for details



**QCT966SP - (AR70)**  
 SPECIAL CEILING  
 (wood, marble, etc...)  
 see page 26-27 for details

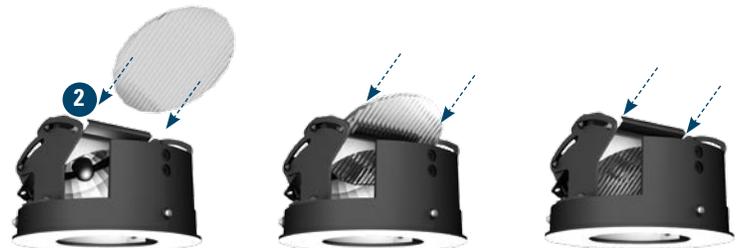

Exclusive Lens Tray enables easy insertion and removal of optical accessories

