


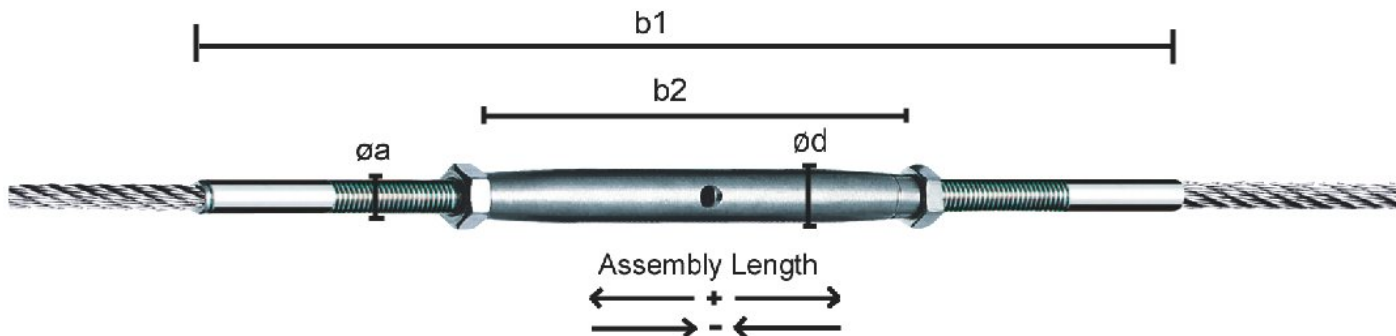

TURNBUCKLE W/ EXTERNAL THREAD F30 HAMMER SWAGE

Part number	ø Rope in mm	a	b1	b2	ød	+	-
828-0400-02	4	M5	160	80	8	38	42
828-0500-02	5	M6	178	92	10	32	40
828-0600-02	6	M8	214	112	13.5	36	47
828-0800-02	8	M10	236	120	17.2	30	44
828-1000-02	10	M12	280	150	21.3	24	40

AISI 316 Breaking strength: 80% of rope Max. Breaking Load

+/- is the starting position for the tensioner. External thread swages

right/left hand allow the turnbuckle to be turned altering the cable length.

Minimum thread engagement recommended as 1.5 X thread size -ø

(M8=12mm). + = less tension, - = more tension.



e-mail: sales@decorcable.com

Toll Free: (800)444-6271