


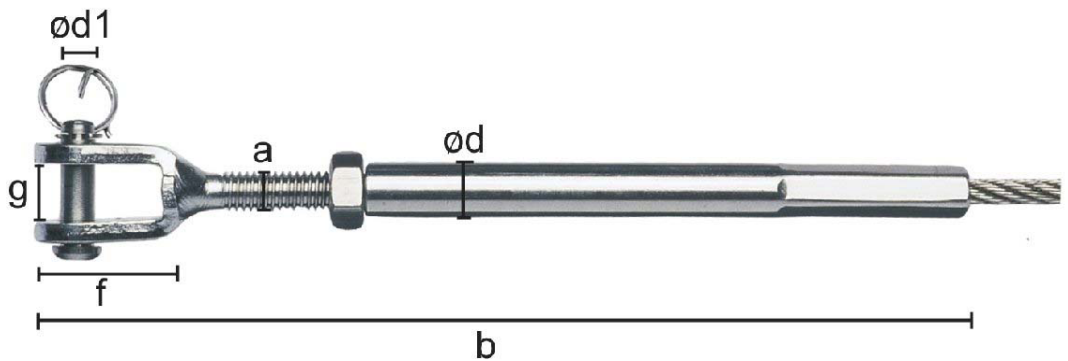

FORK WITH INTERNAL THREAD SWAGED

Part # RH	Part # LH	ø Rope in mm	a	b	d	d1	f	g	Adjustment in mm
812-0300-01	811-0300-01	3	M5	100	7	5	12.0	7.5	+5/-10
812-0300-02	811-0300-02	3	M5	136	7	5	12.0	7.5	+12/-17
812-0400-01	811-0400-01	4	M6	106	8	5	12.0	7.5	+4/-10
812-0400-02	811-0400-02	4	M6	135	8	5	12.0	7.5	+11/-17
812-0500-01	811-0500-01	5	M6	110	8	5	12.0	7.5	+4/-10
812-0500-02	811-0500-02	5	M6	145	8	5	12.0	7.5	+11/-17
812-0600-01	811-0600-01	6	M8	135	10	6	13.0	10	+4/-12
812-0600-02	811-0600-02	6	M8	173	10	6	13.0	10	+17/-25
812-0800-01	811-0800-01	8	M10	248	13	8	15.0	11	+17/-27
812-1000-01	811-1000-01	10	M14	295	20	12	25.0	14	+26/-40
812-1200-01	811-1200-01	12	M16	345	25	14	31.0	22	+26/-42
812-1600-01	811-1600-01	16	M20	410	32	19	50.5	24	+30/-50

AISI 316

Breaking strength: 90% of rope Max. Breaking Load



e-mail: sales@decorcable.com

Toll Free: (800)444-6271

© Copyright 2005 Carl Stahl DécorCable