


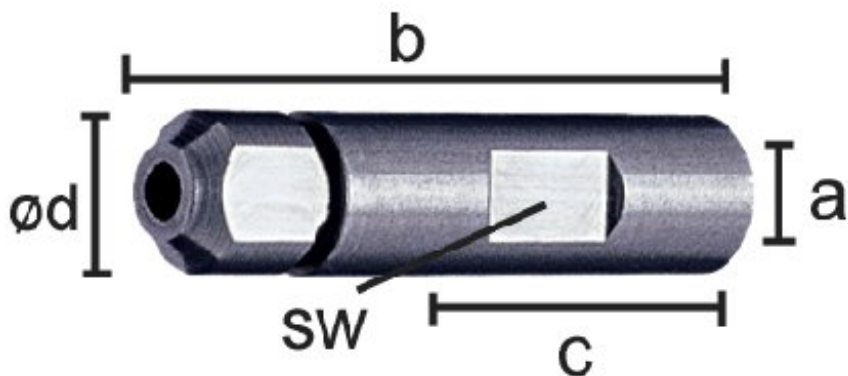

INTERNAL THREAD SCREW TOGETHER

Part # RH	Part # LH	ø Rope in mm	a	b	c	ød	sw
831-0200	832-0200	2	M6	55	18	13	11
831-0300	832-0300	3	M6	55	18	13	11
831-0400	832-0400	4	M6	55	18	13	11
831-0500	832-0500	5	M8	57	20	15	13
831-0600	832-0600	6	M8	57	20	15	13
831-0800	832-0800	8	M10	87	40	20	17
831-1000	832-1000	10	M14	123	60	28	24
831-1200	832-1200	12	M16	137	60	30	27

Dimension c = thread depth.

AISI 316 Breaking strength: 90% of rope Max. Breaking Load



e-mail: sales@decorable.com
Toll Free: (800)444-6271