

SPECIFICATIONS

GENERAL

ESLV2820 #16 gauge, type 304 (18-8) stainless steel surgeon's lavatory with integral instrument trays. Lavatory compartment has 1-3/4" (44mm) radius vertical and horizontal coved corners. Exposed surfaces are hand blended to a uniform satin luster finish. Underside is sound deadened. Furnished with stainless steel support brackets.

(CHECK MODEL SPECIF	•						
MODEL	FAUCET	DRAIN	VALVE				
☐ ESLV2820SACC	LK721AC	LK9	NONE				
☐ ESLV2820SACMC	LK721AC	LK9	LK724				
☐ ESLV2820SACTMC	LK721AC	LK9	LK723				

LK721AC Sensor-operated, non-mixing (tempered water), deck-mounted gooseneck faucet with adjustable sensor eyes. A continuous beam is emitted from sensor. The sensor faucet is activated by user placing hands under the spout. Tempered water will flow as long as hands remain within sensor range. When hands are removed, the water stops automatically based on shut off delay settings. The sensor then resets and is ready for the next user. AC powered, chrome plated - solid brass body construction and 12-1/2" (318mm) high from deck to top of spout, 8-1/4" (210mm) from deck to spout outlet, 5-3/8" (137mm) reach C.P. spout with 2.0 gpm laminar flow control on spout end. Includes vandal-resistant, water-resistant sensor control module with armored vandal-resistant control and power cables, 12V DC plug-in voltage adapter, slow-closing piston operated solenoid valve, in-line filter with clean out trap, and 3/8" (10mm) stainless steel braided 12" (305mm) supply line. Control circuit is solid state, has adjustable sensor range (6" [152mm] preset to 30" [762mm]), shut off delay preset at



Model ESLV2820SACC

1 second and is field adjustable to 2, 4, or 8 seconds, and automatic time-out feature (to prevent sink overflow) is preset at 0 seconds and is field adjustable to 15, 30, or 60 seconds.


LK9 Chrome plated grid strainer with 1-1/4" (32mm) O.D. tailpiece.

LK723 Anti-scald thermostatic mixing valve with nickel-plated brass body 1/2" (13mm) SWT inlets and outlet connections, check valves on inlets and a mixed temperature range of 80°-120°F. Certified under ASSE1016.

LK724 Mechanical mixing valve with C.P. brass body, 3/8" (10mm) compression inlets and outlet connections, and check valves on inlets.

DIMENSIONS

Model	Α		В		С		D		E		F		G		Н		I		J	
Number	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
ESLV2820	28	711	20	508	33/4	95	12	305	14	356	3	76	21/4	57	1	25	6	152	11/2	38

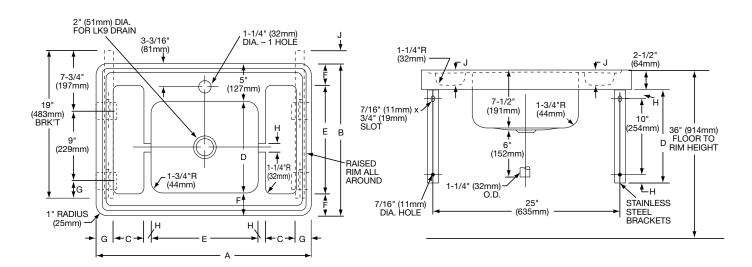

In keeping with our policy of continuing product improvement, Elkay reserves the right to change

3 - 37



ROUGH-IN DIMENSIONS

