

ONE WORLD. ONE COMPANY. ONE SOLUTION.

Model 300S




ThyssenKrupp Elevator's synergy 300S allows travel up to 300'-0" with speeds of 200 and 350 fpm. The 300S offers standard cab and signal fixture designs.

ThyssenKrupp Elevator's determination to develop the most innovative products available has allowed us to become committed to machine room-less elevator technology. synergy is a cost-efficient solution for architects, builders and building owners that uses less space and meets or exceeds today's safety standards.


synergy's compact permanent magnet gearless machine is a highly efficient sustainable solution that provides the performance of a much larger geared-driven system. These permanent magnet gearless machines, coupled with efficient drives in place of conventional geared machines, use less energy. In addition, the machines do not require contaminating gear lubricants.

Both the counterweight and the car are roped 2:1, with standard steel ropes. Innovative design reduces hoistway footprint, as well as overhead and pit depth requirements. In fact, synergy's reduced overhead eliminates the need to alter the superstructure of roofs at all, thus giving it lower overhead requirements than other MRL systems.


It all adds up to maximum design freedom and flexibility – flexibility that allows you to design and plan without compromise. Contact your local ThyssenKrupp Elevator representative at (877) 230.0303.

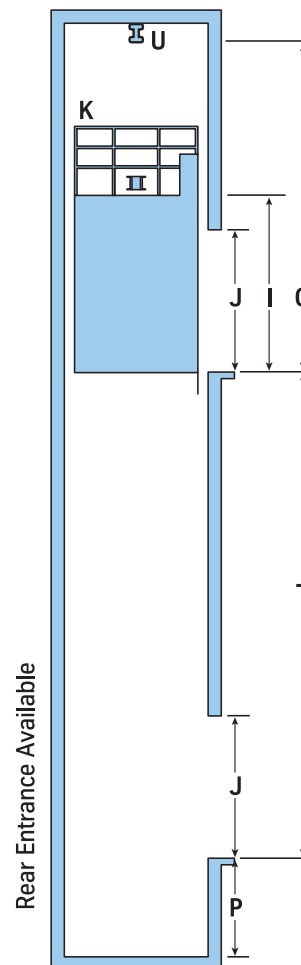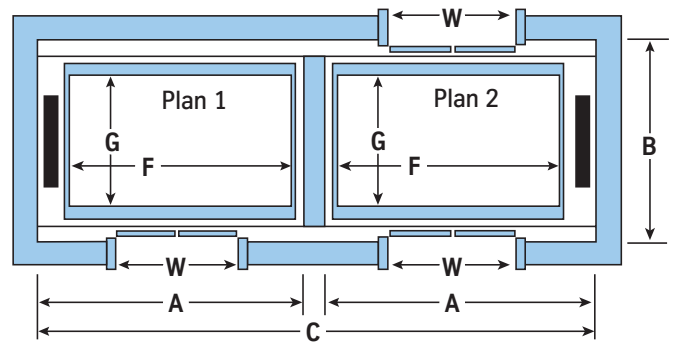

Simplex Controller Closet



Duplex Controller Closet



ThyssenKrupp Elevator Americas



ThyssenKrupp

Model 300S Data Tables

plan 1

Capacity (lbs.)		2500	3000	3500
Speed (fpm)		200	200	200
		350	350	350
T	Maximum Travel	300'-0"	300'-0"	300'-0"
A	Hoistway Width ¹	9'-2"	9'-2"	9'-2"
B	Hoistway Depth	5'-9"	6'-3"	6'-11"
C	Duplex Hoistway Width ^{1,4}	18'-8"	18'-8"	18'-8"
F	Clear Inside Width	6'-8"	6'-8"	6'-8"
G	Clear Inside Depth	4'-3"	4'-9"	5'-5"
W	Door Opening Width	3'-6"	3'-6"	3'-6"
J	Door Opening Height	7'-0"	7'-0"	7'-0"
I	Cab Height ⁵	7'-10"	7'-10"	7'-10"
P	Pit (200 fpm) ³	5'-0"	5'-0"	5'-0"
P	Pit (350 fpm) ³	5'-5"	5'-5"	5'-5"
O	Overhead (200 fpm)	14'-9"	14'-9"	14'-9"
O	Overhead (350 fpm)	15'-5"	15'-5"	15'-5"
	Support Type	Overhead Support Req'd	Overhead Support Req'd	Overhead Support Req'd
	Rope Size	8mm & 10mm	8mm & 10mm	8mm & 10mm
X	Controller Closet ²	5'-6" x 6'-4"	5'-6" x 6'-4"	5'-6" x 6'-4"
Y	Duplex Controller Closet ²	8'-0" x 5'-6"	8'-0" x 5'-6"	8'-0" x 5'-6"
	Cwt Location	Side	Side	Side
	Roping	2:1 Underslung	2:1 Underslung	2:1 Underslung

Hoistway dimensions are based on 1" out of plumb and no occupied space below the hoistway. If these conditions cannot be met, then consideration must be given for additional required space. Hoistway temperature range = 32° F minimum, 122° F maximum.

- For Seismic Zones 2 or greater, add 4" to hoistway width. For duplex cars, add 8" to hoistway width.
- Controller closet temperature range 32° F. Min., 104° F. Max. 10% - 95% Non-Condensing Relative Humidity. **(M)** Disconnect by others. **(N)** Isolation Transformer (as required) **(Q)** Controller. Additional controller closet space may be required with security cabinet or additional electrical boxes or features.
- Pit Ladder **(P)** by others. Requirements for Pit Ladder cut out: 1'-11 1/2" x 2 1/2" notch required for 5" ladder; 1'-11 1/2" x 5" notch required for 7" ladder. Cut out location varies, depending on project conditions. Refer to your specific project layout, or contact your local TKE representative for details.
- Duplex Hoistway Width includes 4" allowance for divider beam.
- Cab Heights of 8'-10" and 9'-10" also available (in one foot increments only).

NOTES: **(K)** represents Car Top Rail, if required.
5,000 lb. capacity safety beam **(U)** is by others.

Hoistway dimensions are based on 1" out of plumb and no occupied space below the hoistway. If these conditions cannot be met, then consideration must be given for additional required space. Hoistway temperature range = 32° F minimum, 122° F maximum.

- For Seismic Zones 2 or greater, add 4" to hoistway width. For duplex cars, add 8" to hoistway width.
- Controller closet temperature range 32° F. Min., 104° F. Max. 10% - 95% Non-Condensing Relative Humidity. **(M)** Disconnect by others. **(N)** Isolation Transformer (as required) **(Q)** Controller. Additional controller closet space may be required with security cabinet or additional electrical boxes or features.
- Pit Ladder **(P)** by others. Requirements for Pit Ladder cut out: 1'-11 1/2" x 2 1/2" notch required for 5" ladder; 1'-11 1/2" x 5" notch required for 7" ladder. Cut out location varies, depending on project conditions. Refer to your specific project layout, or contact your local TKE representative for details.
- Duplex Hoistway Width includes 4" allowance for divider beam.
- Cab Heights of 8'-10" and 9'-10" also available (in one foot increments only).

NOTES: **(K)** represents Car Top Rail, if required.
5,000 lb. capacity safety beam **(U)** is by others.

plan 2

Capacity (lbs.)		2500	3000	3500
Speed (fpm)		200	200	200
		350	350	350
T	Maximum Travel	300'-0"	300'-0"	300'-0"
A	Hoistway Width ¹	9'-2"	9'-2"	9'-2"
B	Hoistway Depth	6'-8 3/4"	7'-2 3/4"	7'-10 3/4"
C	Duplex Hoistway Width ^{1,4}	18'-8"	18'-8"	18'-8"
F	Clear Inside Width	6'-8"	6'-8"	6'-8"
G	Clear Inside Depth	4'-3 1/2"	4'-9 1/2"	5'-5 1/2"
W	Door Opening Width	3'-6"	3'-6"	3'-6"
J	Door Opening Height	7'-0"	7'-0"	7'-0"
I	Cab Height ⁵	7'-10"	7'-10"	7'-10"
P	Pit (200 fpm) ³	5'-0"	5'-0"	5'-0"
P	Pit (350 fpm) ³	5'-5"	5'-5"	5'-5"
O	Overhead (200 fpm)	14'-9"	14'-9"	14'-9"
O	Overhead (350 fpm)	15'-5"	15'-5"	15'-5"
	Support Type	Overhead Support Req'd	Overhead Support Req'd	Overhead Support Req'd
	Rope Size	8mm & 10mm	8mm & 10mm	8mm & 10mm
X	Controller Closet ²	5'-6" x 6'-4"	5'-6" x 6'-4"	5'-6" x 6'-4"
Y	Duplex Controller Closet ²	8'-0" x 5'-6"	8'-0" x 5'-6"	8'-0" x 5'-6"
	Cwt Location	Side	Side	Side
	Roping	2:1 Underslung	2:1 Underslung	2:1 Underslung

ThyssenKrupp Elevator | P.O. Box 2177 | Memphis, TN 38101

Tel: (877) 230-0303 (toll free) | thyssenkruppelevator.com | version 05.19.10

All illustrations and specifications are based on information in effect at time of publication approval. ThyssenKrupp Elevator reserves the right to change specifications or design and to discontinue items without prior notice or obligation. Copyright © 2010 ThyssenKrupp Elevator Corporation.

