RD-200

Tag: _____

Small Area Roof Drain

SPECIFICATION: Watts Drainage RD-200 epoxy coated cast iron roof drain with flashing clamp with integral gravel stop, self-locking polyethylene dome, and no hub (standard) outlet.

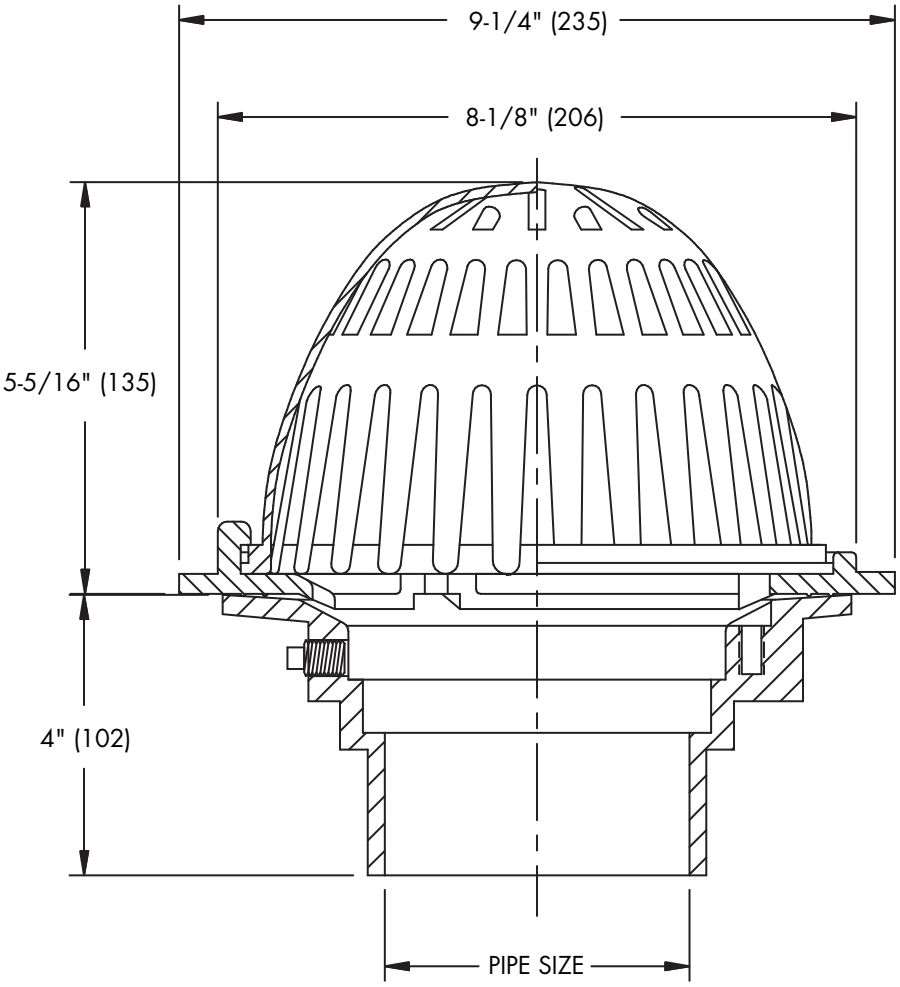

Components



Pipe Sizing (Select One)

Suffix	Description	
2	2"(51) Pipe Size	☐
3	3"(76) Pipe Size	☐
4	4"(102) Pipe Size	☐

Outlet Type (Select One)

Suffix	Description	
NH	No Hub (MJ)	☐
P	Push On	☐
T	Threaded Outlet	☐
X	Inside Caulk	☐

Options (Select One or More)

Suffix	Description	
-13	Galvanized Body & Flashing Clamp	☐
-B	Sump Receiver	☐
-D	Underdeck Clamp	☐
-F	Adjustable Extension Flange	☐
-GSS	Stainless Steel Ballast Guard	☐
-K	Ductile Iron Dome	☐
-K80	Aluminum Dome	☐
-K81	Rough Bronze Dome	☐
-L	Vandal Proof Dome	☐
-R	2" External Water Dam	☐
-SO	Side Outlet	☐
-W	Adjustable Internal Water Dam	☐

Optional Body Material

Suffix	Description	
-60	PVC Body w/Socket Outlet	☐
-61	ABS Body w/Socket Outlet	☐

Free Area Sq. In.
35

Chart B

	Std.	P	T	X	60/61
Pipe Size	No Hub	Push On	Female Thread	Inside Caulk	PVC/ ABS
2"(51)	3-5/8"(92)	4-1/4"(108)	4-1/4"(108)	4-1/4"(108)	3-3/4"(95)
3"(76)	3-5/8"(92)	4-1/4"(108)	4-1/4"(108)	4-1/4"(108)	3-5/8"(92)
4"(102)	3-5/8"(92)	4-1/4"(108)	4-1/4"(108)	4-1/4"(108)	3-7/8"(94)

Deck opening 6-1/2"(165) with sump receiver 8"(203)

Job Name _____ Contractor _____

Job Location _____ Contractor's P.O. No. _____

Engineer _____ Representative _____

WATTS Drainage reserves the right to modify or change product design or construction without prior notice and without incurring any obligation to make similar changes and modifications to products previously or subsequently sold. See your WATTS Drainage representative for any clarification. Dimensions are subject to manufacturing tolerances.

Specification Drainage Products

USA: 100 Watts Road, Spindale, NC, 28160-2298; TEL: 828-288-2179 TOLL-FREE: 1-800-338-2581 www.watts.com