



WALL VALVE & TRIM WITH CROSS HANDLE GUSVI2R (ROUGH) & AMSV34 (TRIM)

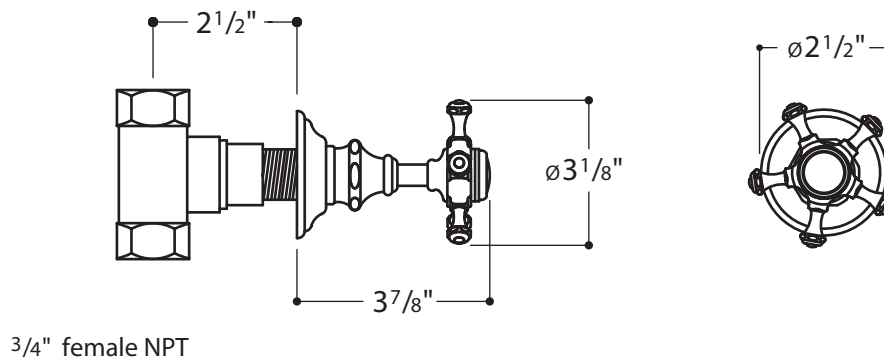

THERMOSTATIC VALVE & TRIM WITH LEVER HANDLE GUSV34R (ROUGH) & AMSV70 (TRIM)

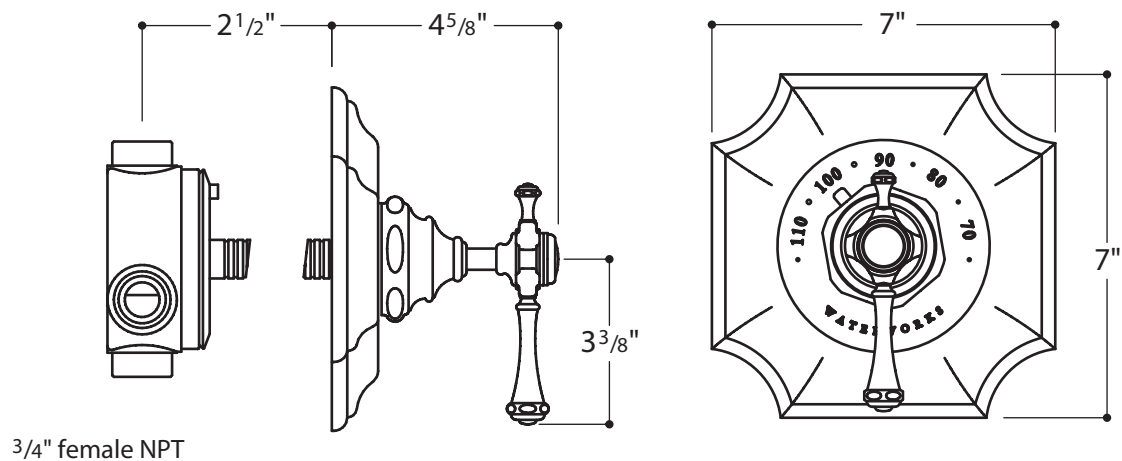

Notes:

- Ideal operating pressure is 40 - 50 psi
- Maximum static pressure is 125 psi
- Minimum static pressure is 25 psi

All dimensions are based on original specifications and are subject to change and variation. Please consult your Design Associate for current specification.