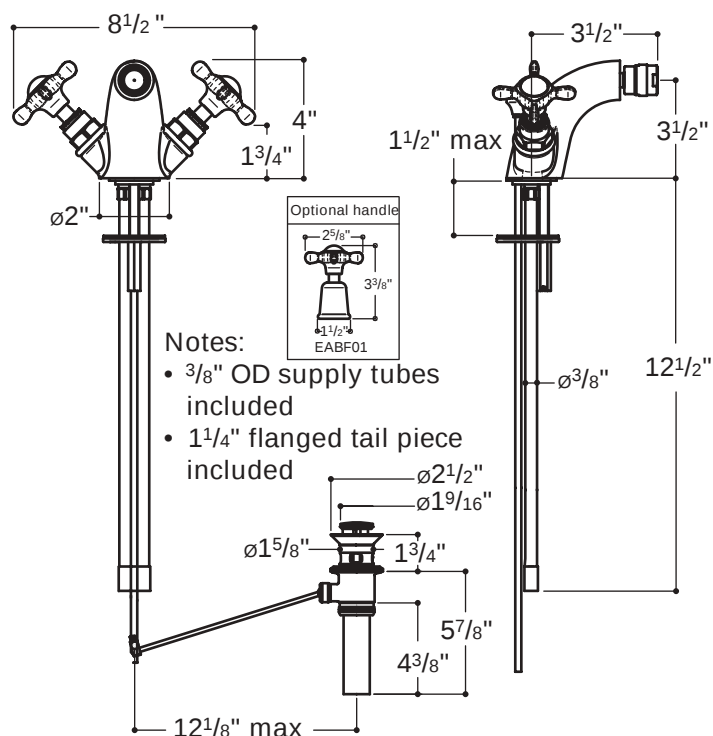


EABF11 (uncovered)**EABF01** (covered)**INSTALLATION GUIDELINES:****IMPORTANT:**

- To ensure this product is installed properly, you must read and follow these guidelines.
- The owner/user of this fitting must keep this information for future reference.
- Be sure your installation conforms to federal, state, and local codes.
- Refer to the specification and assembly drawings attached. Fitting is sold partially assembled but shown fully disassembled for illustrative and service purposes only.
- Inspect this product to assure you have all parts required for proper installation.
- Use only a strap wrench or protected/smooth-jaw wrench on any finished surface.
- If possible, install the bidet fitting assembly on the bidet before setting.
- Do NOT use putty during this installation.


ROUGH IN:

1. Complete the waste and supply rough-in based on the specifications of the bidet. You may use supplies and a drain that pass through the floor or pass through the wall.

SPOUT AND DRAIN INSTALLATION:

2. Remove the spout attachment hardware (20,21,23) from the spout. Do NOT remove the threaded rod (22).
 3. With the supply hoses (24) and lift rod assembly (12-15) installed, insert the spout assembly (1-19) through the spout hole of the mounting surface.
 4. Place the rubber spout gasket (20) and then spout washer (21) onto the threaded rod, making sure the supply tubes do not get pinched and the lift rod operates smoothly through the opening of the spout washer.
 5. Tighten the 10mm barrel nut (23) onto the threaded rod to secure the spout to the mounting surface. Note that this nut can be flipped to accommodate different mounting surface thicknesses.
 6. Remove the upper collar (28) from the pop-up drain assembly and discard the upper gasket (29).
 7. Set the upper collar in the lavatory drain opening using a clear adhesive silicone.
 8. Reattach the lower drain assembly (34) using the gasket (30) provided and then tighten until fully secured. A clear adhesive silicone may be used to ensure a water-tight seal between the gasket and bidet.
 9. Remove the knurled nut (31) from the lower drain assembly and then insert the horizontal pivot rod (32) and reattach the knurled nut.
 10. Connect the vertical lift rod to the horizontal pivot rod using the linkage (15) provided. Note that these rods may be field cut.
 11. Attach the tail piece (36,37) using the gasket (35) provided.
 12. Complete the drain connection based on the rough-in specifications.
 13. Connect the supply tubes (24) to the water supply valves (not supplied).
- INSPECT THE INSTALLATION:**
14. Unscrew and remove the aerator assembly (16-17) which includes a 2.2 GPM flow restrictor (16)

- 15. Carefully open the hot and cold valves to flush out any debris in the supply lines.
 - 16. Inspect all connections for leaks.
 - 17. Close the drain and then fill the bidet with water to make sure the drain stopper (25) operates and seals properly.
 - 17b. To adjust the height of the drain stopper; turn the adjustment screw (27) at the base of the stopper and then tighten the locking nut to secure.
 - 17c. The linkage (15) position will effect drain stopper function, adjust as needed.
 - 18. Close the valves and reinstall the aerator assembly.
- If further assistance is required, please contact Product Support at 1-800-927-2120 (8am-7pm EST).

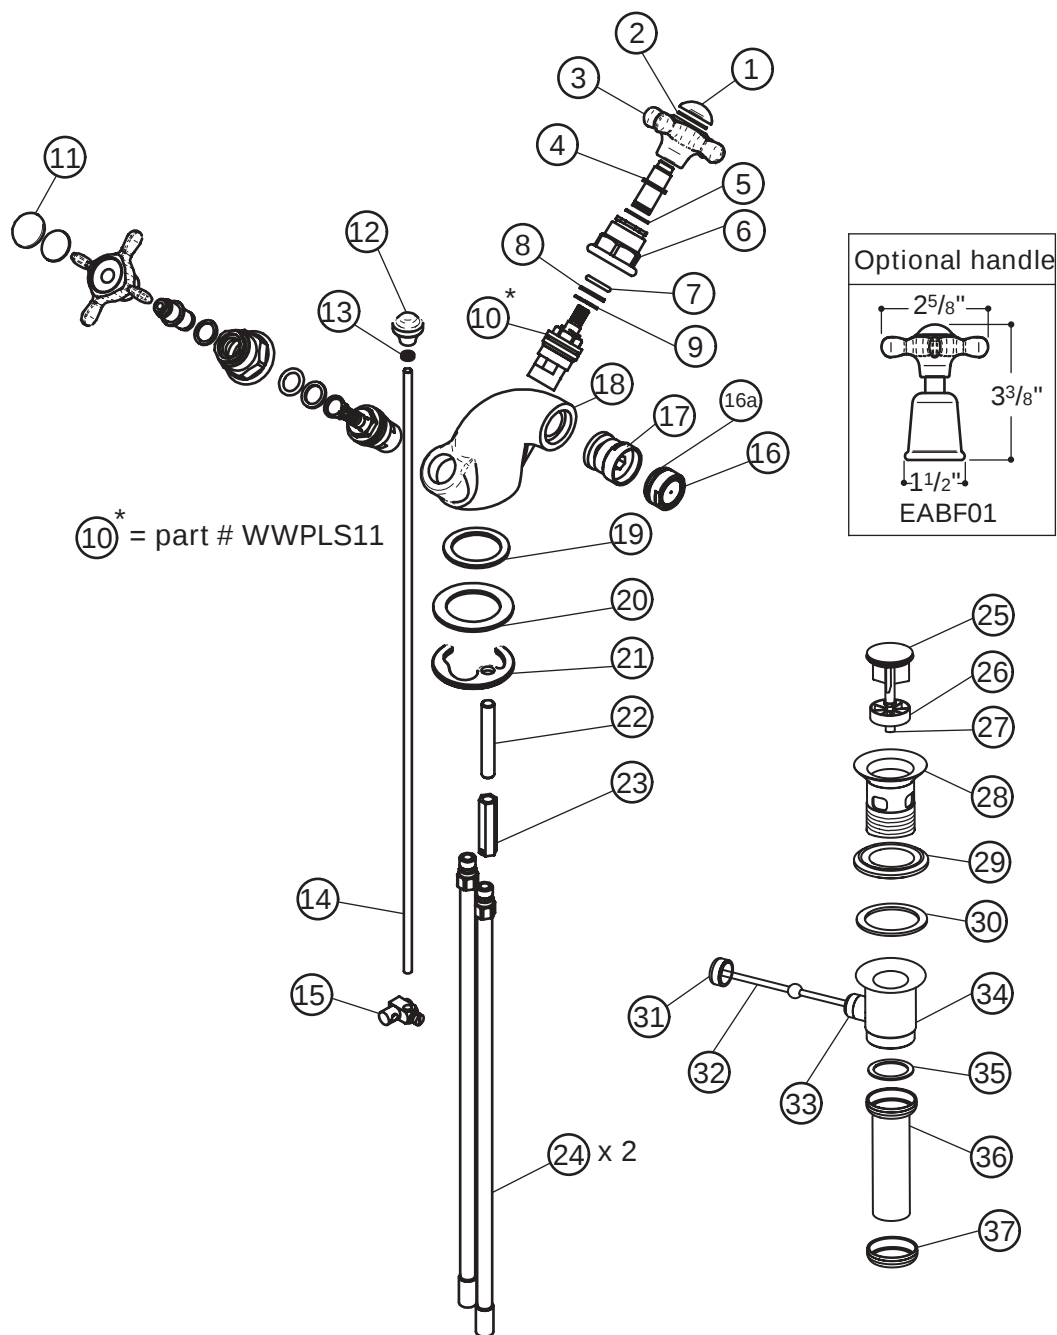

These guidelines have been prepared for the professional contractor to aid in the installation of:
EASTON® BIDET FITTING (EABF01 & EABF01)

12/03

All dimensions are based on original specifications and are subject to change and variation.
Please consult your Design Associate for current specifications.

W A T E R W O R K S®

CARE AND CLEANING

The lustrous finish on your fitting should be treated with care. Improper handling or cleaning can damage the surface of any metal finish.

To clean the finish, wipe gently with a soft damp cloth and wipe dry with a soft towel. Use only a mild soap solution if required. THE USE OF POLISH, ABRASIVE CLEANERS, SOLVENTS, AMMONIA-BASED PRODUCTS, OR ACID CLEANERS WILL DAMAGE THE FINISH AND VOID THE WARRANTY.

Water contains lime and other minerals that will be left on the surface after the water has evaporated. You can prevent deposits from forming by always wiping the fitting dry immediately after use.

If you desire additional protection, the use of a pure carnauba automotive wax that does not contain cleaning agents will help to protect the surface finish from mineral deposits present in your water supply. This can be reapplied as necessary to continue protection.

Please note: In addition to the aforementioned care instructions, the following points are specific to certain finishes only. Select Waterworks faucets and basins are offered in finishes that have been pre-weathered, creating a patina that will continue to develop with age. In addition, items purchased in the unlacquered brass and copper finishes will change over time and may be polished using appropriate polishing compounds. Fittings offered in a silver-plated finish will tarnish with age. This finish may be restored to its original luster by using a non-abrasive silver polish. Be sure to read and follow the polish manufacturer's instructions for all applications.

WARRANTY

LIMITED LIFETIME MECHANICAL WARRANTY:

Waterworks warrants to the initial purchaser all plumbing and accessory products sold by Waterworks, which are installed in a residence to be used in a residential application, to be free from manufacturing defects in materials and workmanship for as long as the purchaser continues to own and maintain the residence where the products are initially installed.

FIVE-YEAR FINISH WARRANTY:

Waterworks warrants to the purchaser the finish of all plumbing and accessory products sold by Waterworks, which are installed in a residence to be used in a residential application, to be free from manufacturing defects in materials and workmanship for a period of five years from installation of the products. Waterworks must receive notice of any warranty claim within the five-year warranty period.

REPAIR OR REPLACEMENT:

If within the applicable warranty period the covered products shall be proved to the satisfaction of Waterworks to be defective, Waterworks will repair or replace such products, at its expense (provided that such repair or replacement shall not include installation costs). Waterworks' obligation shall be limited to such repair and replacement and shall be conditioned upon Waterworks' receiving notice of any alleged defect within the applicable warranty period. Purchaser shall be responsible for all shipping charges for returned products.

LIMITATIONS ON WARRANTY COVERAGE:

The warranties set forth above shall be extended only to the purchaser and do not apply to any purchaser where the products are used for commercial applications and usage. Furthermore, the warranties do not cover installation or any other labor charges and do not apply to:

- (i) products which have been repaired, altered or modified in any way by purchaser or any person other than Waterworks or not using original Waterworks spare parts, unless previously authorized in writing by Waterworks;
- (ii) products which have not been installed, used, maintained or stored in accordance with the instructions provided to purchaser by Waterworks;
- (iii) products which have been used for purposes other than or in a manner contrary to their intended and normal use;
- (iv) products which have been damaged as a result of misuse, negligence, freezing, accident or faulty installation or maintenance; and
- (v) products damaged by the effects of dirt, salt water air, hard water, limescale, or abrasive or aggressive cleaners. If the normal life span of any product is shorter than the applicable warranty period, the warranty shall apply only during the period of such shorter life span.

NOTICE OF WARRANTY CLAIMS:

For all warranty claims please call Waterworks Product Support at 800-927-2120, or write to Waterworks Product Support at 60 Backus Avenue, Danbury, Connecticut 06810.

The warranties provided herein are conveyed only to the purchaser of products sold by Waterworks after January 1, 2000, and installed in a residential application.

Except as specifically set forth above, Waterworks does not make any other warranty, express or implied, including without limitation, any implied warranty of merchantability or fitness for a particular purpose. In no event shall Waterworks be liable to any person or entity for any indirect, special, incidental or consequential damages or loss (including damages for loss of business, loss of profits, or the like), whether based on breach of contract, tort (including negligence), product liability or otherwise, even if it has been advised of the possibility of such damages. Waterworks' liability on any claim of any kind, including negligence, shall in no case exceed the contract price paid by the purchaser for the product claimed to be defective or unsuitable.